



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## PIT 2,5-3L BU

Order No.: 3210509

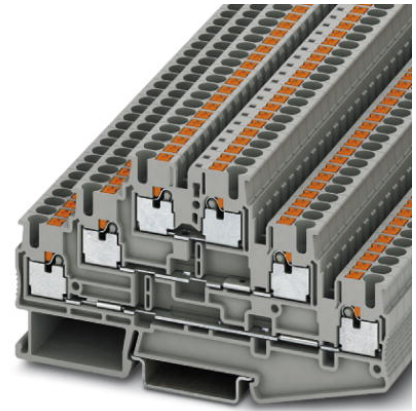

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3210509>

Feed-through modular terminal block, Type of connection: Leg spring connection, Leg spring connection, Cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG 26 - 12, Width: 5.2 mm, Color: blue, Mounting type: NS 35/7,5, NS 35/15

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4046356422581      |
| Pack                     | 50 pcs.            |
| Customs tariff           | 85369010           |
| Weight/Piece             | 0.02192 KG         |
| Catalog page information | Page 190 (CL-2009) |

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

|                                    |      |
|------------------------------------|------|
| Number of levels                   | 1    |
| Number of connections              | 6    |
| Color                              | blue |
| Insulating material                | PA   |
| Inflammability class acc. to UL 94 | V0   |

#### Dimensions

|        |        |
|--------|--------|
| Width  | 5.2 mm |
| Length | 102 mm |

|                  |         |
|------------------|---------|
| Height NS 35/7,5 | 58 mm   |
| Height NS 35/15  | 65.5 mm |

**Technical data**

|                                  |               |
|----------------------------------|---------------|
| Rated surge voltage              | 6 kV          |
| Pollution degree                 | 3             |
| Surge voltage category           | III           |
| Insulating material group        | I             |
| Connection in acc. with standard | IEC 60947-7-1 |
| Nominal current $I_N$            | 20 A          |
| Nominal voltage $U_N$            | 500 V         |

**Connection data**

|   |                       |
|---|-----------------------|
| Conductor cross section solid min.  | 0.14 mm <sup>2</sup>  |
| Conductor cross section solid max.  | 4 mm <sup>2</sup>     |
| Conductor cross section stranded min.   | 0.14 mm <sup>2</sup>  |
| Conductor cross section stranded max.   | 2.5 mm <sup>2</sup>   |
| Conductor cross section AWG/kcmil min.  | 26                    |
| Conductor cross section AWG/kcmil max   | 12                    |
| Conductor cross section stranded, with ferrule without plastic sleeve min.              | 0.14 mm <sup>2</sup>  |
| Conductor cross section stranded, with ferrule without plastic sleeve max.              | 2.5 mm <sup>2</sup>   |
| Conductor cross section stranded, with ferrule with plastic sleeve min.                 | 0.14 mm <sup>2</sup>  |
| Conductor cross section stranded, with ferrule with plastic sleeve max.                 | 2.5 mm <sup>2</sup>   |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 0.5 mm <sup>2</sup>   |
| Type of connection  | Leg spring connection |
| Stripping length  | 10 mm                 |
| Internal cylindrical gage   | A3                    |

| <b>Accessories</b> |                              |  |
|--------------------|------------------------------|--|
| Item               | Designation                  | Description  |
| <b>Assembly</b>    |                              |  |
| 3022276            | CLIPFIX 35-5                 | Snap-on end bracket, for NS 35/7.5 or NS 35/15 DIN rail, can be fitted with Zack strip ZB 5 and ZBF 5, terminal strip marker KLM 2 and KLM, parking facility for FBS...5, FBS...6, KSS 5, KSS 6, width: 5,15 mm, color: gray |
| 3036725            | DP PS-5                      | Spacer plate, Color: red   |
| 0801704            | NS 35/ 7,5 AL UNPERF 2000MM  | DIN rail, material: Aluminum, unperforated, height 7.5 mm, width 35 mm, length: 2 m  |
| 0801762            | NS 35/ 7,5 CU UNPERF 2000MM  | DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m  |
| 1207640            | NS 35/ 7,5 PERF 755MM        | NS 35 DIN rail, height 7.5 mm, length 755 mm   |
| 1207653            | NS 35/ 7,5 PERF 955MM        | NS35 DIN rail, height 7.5 mm, length 955 mm  |
| 1207666            | NS 35/ 7,5 PERF 1155MM       | NS 35 DIN rail, height 7.5 mm, length 1155 mm  |
| 0801733            | NS 35/ 7,5 PERF 2000MM       | DIN rail, material: Steel, galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2 m   |
| 1208131            | NS 35/ 7,5 PERF/...          | DIN rail, Color: silver  |
| 0801681            | NS 35/ 7,5 UNPERF 2000MM     | DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m   |
| 1208115            | NS 35/ 7,5 UNPERF/...        | DIN rail, Color: silver  |
| 1208128            | NS 35/ 7,5 UNPERF/SO/...     | DIN rail, Color: silver  |
| 0801377            | NS 35/ 7,5 V2A UNPERF 2000MM | DIN rail, Width: 35 mm, Height: 7.5 mm, Length: 2000 mm, Color: silver   |
| 1206421            | NS 35/ 7,5 ZN PERF 2000MM    | DIN rail, material: Galvanized, perforated, height 7.5 mm, width 35 mm, length: 2 m  |
| 1206434            | NS 35/ 7,5 ZN UNPERF 2000MM  | DIN rail, material: Galvanized, unperforated, height 7.5 mm, width 35 mm, length: 2 m  |
| 1201895            | NS 35/15 CU UNPERF 2000MM    | DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m   |
| 1201730            | NS 35/15 PERF 2000MM         | DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m  |
| 1201714            | NS 35/15 UNPERF 2000MM       | DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m  |
| 1208144            | NS 35/15 UNPERF/...          | DIN rail, Color: silver  |
| 1208157            | NS 35/15 UNPERF/SO/...       | DIN rail, Color: silver  |
| 1206586            | NS 35/15 ZN UNPERF 2000MM    | DIN rail, material: Galvanized, unperforated, height 15 mm, width 35 mm, length: 2 m   |

**Bridges**

|         |          |   |
|---------|----------|---|
| 3030161 | FBS 2-5  | Cross connector/bridge, Number of positions: 2, Color: red  |
| 3030174 | FBS 3-5  | Cross connector/bridge, Number of positions: 3, Color: red  |
| 3030187 | FBS 4-5  | Cross connector/bridge, Number of positions: 4, Color: red  |
| 3030190 | FBS 5-5  | Cross connector/bridge, Number of positions: 5, Color: red  |
| 3030213 | FBS 10-5 | Cross connector/bridge, Number of positions: 10, Color: red |
| 3030226 | FBS 20-5 | Cross connector/bridge, Number of positions: 20, Color: red |
| 3038930 | FBS 50-5 | Cross connector/bridge, Number of positions: 50, Color: red |

**General**

|         |              |   |
|---------|--------------|---|
| 3211647 | D-PIT 2,5-3L | Cover, Length: 102 mm, Width: 2.2 mm, Color: gray               |
| 3032185 | FBS-PV       | Vertical potential bridge, to connect the upper and lower level |

**Marking**

|         |                  |  |
|---------|------------------|--|
| 0810562 | STP 5-3          | Triple marker carriers, snaps onto the three-level spring-cage terminal block ST 2.5-3L, labeled with ZB 5 or ZBF                                  |
| 0818108 | UC-TM 5          | UniCard sheets, for labeling terminal blocks using Zack marker strip groove,96-section, labeling with BLUEMARK X1 and CMS-P1-PLOTTER, color: White |
| 0824581 | UC-TM 5 CUS      | UniCard sheets, for labeling terminal blocks with a zack marker strip groove, can be printed as per customer requirements                          |
| 0824638 | UC-TMF 5 CUS     | UniCard sheets, for labeling terminal blocks with a flat zack marker sheet groove, can be printed as per customer requirements                     |
| 0819796 | UC-TMF 5L        | UniCard sheets, for labeling terminal blocks using a flat Zack marker strip groove, 192-section, can be labeled with CMS-P1-PLOTTER, color: White  |
| 0808642 | ZBF 5:UNBEDRUCKT | Zack strip, flat, unprinted: 10-section, for individual labeling with M-PEN or ZBF-T, sufficient for 100 terminal blocks, color: white             |

**Plug/Adapter**

|         |             |                                      |
|---------|-------------|--------------------------------------|
| 3002843 | ISH 2,5/0,2 | Insulation stop sleeve, Color: white |
| 3002856 | ISH 2,5/0,5 | Insulation stop sleeve, Color: gray  |
| 3002869 | ISH 2,5/1,0 | Insulation stop sleeve, Color: black |
| 3030925 | PAI-4       | Test adapter, Color: gray            |
| 3030983 | PS-5        | Test adapter, Color: red             |

**Tools**

|         |               |   |
|---------|---------------|---|
| 1204517 | SZF 1-0,6X3,5 | Screwdriver, blade: 0.6 x 3.5 x 100 mm, length 180 mm |
|---------|---------------|---|

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;