



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



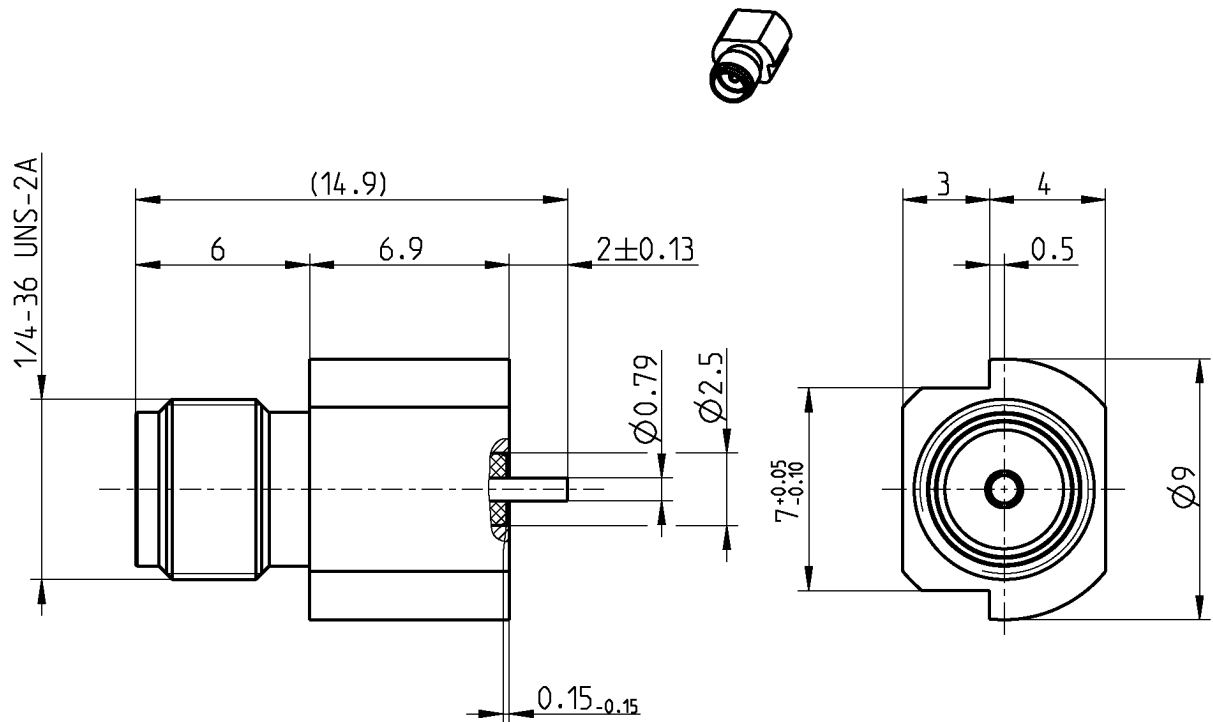

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 60169-15; EN 122110; MIL-STD-348

Documents

PCB layout

B 207

Tape & reel packaging

VG57.50000

Material and plating

Connector parts

Center contact

Outer contact

Dielectric

Material

Beryllium copper

Brass

PTFE

Plating

Gold, min. 0.15 µm, over chemical nickel

Gold, min. 0.15 µm, over chemical nickel

Electrical data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR	$\leq 1.1 + 0.02 \times f \text{ [GHz]}$
Insertion loss	$\leq 0.03 \times \sqrt{f(\text{GHz})} \text{ dB}$
Insulation resistance	$\geq 5 \times 10^3 \text{ M}\Omega$
Center contact resistance	$\leq 3 \text{ m}\Omega$
Outer contact resistance	$\leq 2 \text{ m}\Omega$
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	$\leq 200 \text{ W @ 2 GHz}; \leq 100 \text{ W @ 10 GHz}$
RF-leakage	$\geq 100 \text{ dB up to 1 GHz}$

- VSWR in application depends decisive on PCB layout -

Mechanical data

Mating cycles	min. 100
Center contact captivation: axial	$\geq 20 \text{ N}$
Coupling test torque	max. 0.6 Nm
Recommended torque	0.5 Nm

Environmental data

Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
Max. soldering temperature	IEC 61760-1, +260°C for 10 sec.
RoHS	compliant

Tooling

N/A

Suitable cables

N/A

Weight

Weight 3.39 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Rong Fang	13/05/04	J_Krautenbacher	21.07.16	h00	15-1629	I_Wallner	21.07.16

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0
email: info@rosenberger.de

Page

2 / 2