



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Aluminum Electrolytic Capacitors

+85°C Low Profile, Radial Lead


FEATURES

Small Size - Low Profile - Lead Free Leads

APPLICATIONS

Coupling - Blocking - Bypass - Filtering

Operating Temperature Range		-40°C to +85°C										
Capacitance Tolerance		+20% at 120 Hz, 20°C										
Surge voltage	WVDC	6.3	10	16	25	35	50					
	SVDC	7.9	13	20	32	44	63					
Dissipation Factor	WVDC	6.3	10	16	25	35	50					
	tan δ	.25	.2	.17	.15	.12	.1					
Leakage current		2 Minutes										
		.01CV or 3uA, Whichever is greater										
Low temperature stability Impedance ratio (120 Hz)	Rated WVDC	6.3	10	16	25	35	50					
	-25°C to +20°C	5	4	3	2	2	2					
	-40°C to +20°C	10	8	6	4	4	4					
Load Life		1000 hours at 85°C with rated WVDC applied										
		Capacitance change	<20% of initial measured value									
		Dissipation factor	<200% of maximum specified value									
		Leakage current	≥100% of maximum specified value									
Shelf Life		1000 hours at 85°C with no voltage applied										
		Capacitance change	<20% of initial measured value									
		Dissipation factor	<200% of maximum specified value									
		Leakage current	≥100% of maximum specified value									
Ripple Current Multipliers		Frequency (Hz)					Temperature (°C)					
		50	120	400	1k	10k	100k	85	70	65	60	45
		0.85	1.0	1.1	1.13	1.15	1.4	1.0	1.4	1.6	1.7	1.8

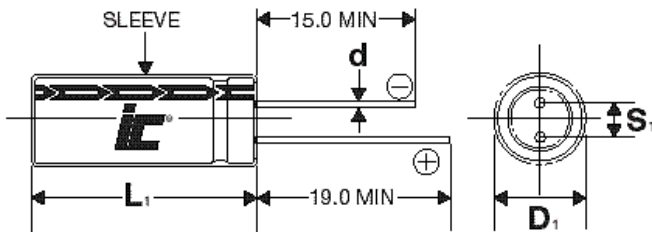

D+.5	4	5	6.3	8	10	12.5	16
S	1.5	2	2.5	3.5	5	5	7.5
d	.45	.45	.45	.6	.6	.6	.8
B	0.5	0.5	0.5	0.5	0.5	0.8	0.5

L₁=L+1mm
S₁=S±0.5mm

RSS

+85°C, 7 to 15mm Height
1000 hours

Capacitance (µF)	WVDC	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum RMS Ripple Current (mA) 120 Hz, +85°C	Dims DxL (mm)
1	50	105RSS050M	165.786	10	4x7
2.2	50	225RSS050M	75.358	20	4x7
3.3	50	335RSS050M	50.238	25	4x7
4.7	35	475RSS035M	42.328	25	4x7
4.7	50	475RSS050M	35.274	30	5x7
10	16	106RSS016M	28.184	40	4x7
10	35	106RSS035M	19.894	45	5x7
10	50	106RSS050M	16.579	50	6.3x7
22	16	226RSS016M	12.811	45	5x7
22	35	226RSS035M	9.043	70	6.3x7
33	10	336RSS010M	10.0477	50	5x7
33	25	336RSS025M	7.536	70	6.3x7

Capacitance (µF)	WVDC	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum RMS Ripple Current (mA) 120 Hz, +85°C	Dims DxL (mm)
47	6.3	476RSS6R3M	7.055	80	5x7
47	16	476RSS016M	5.997	80	6.3x7
100	6.3	107RSS6R3M	4.145	90	6.3x7
100	25	107RSS025M	2.487	135	8x9
100	35	107RSS035M	1.989	160	10x9
220	10	227RSS010M	1.507	165	8x9
220	16	227RSS016M	1.281	202	10x9
470	6.3	477RSS6R3M	0.882	238	10x9
470	35	477RSS035M	0.423	524	10x12.5
1000	16	108RSS016M	0.282	655	12.5x15
1000	35	108RSS035M	0.199	1000	16x15
2200	16	228RSS016M	0.1583	940	16x15