



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com




Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Premium Male/Female Raw Jumper Wires – 40 x 6"

PRODUCT ID: 3633

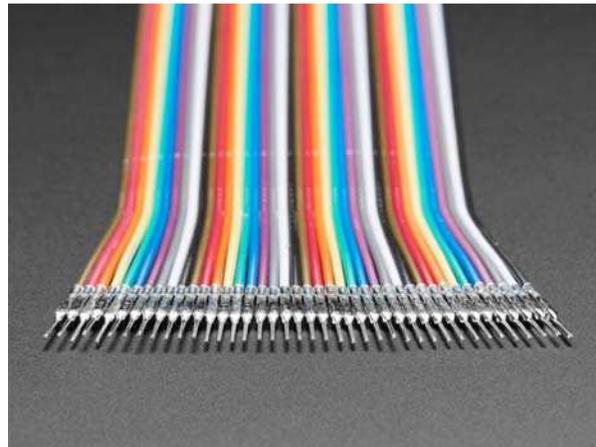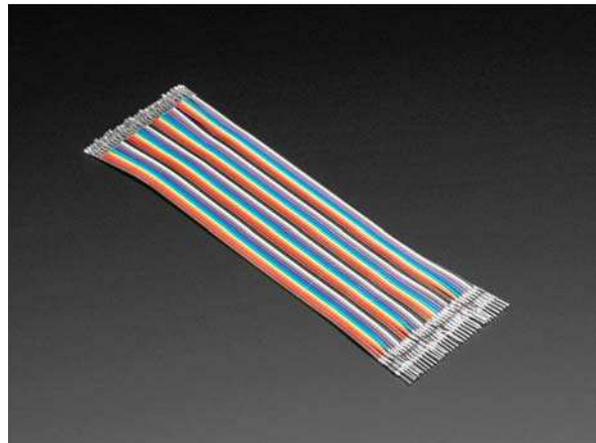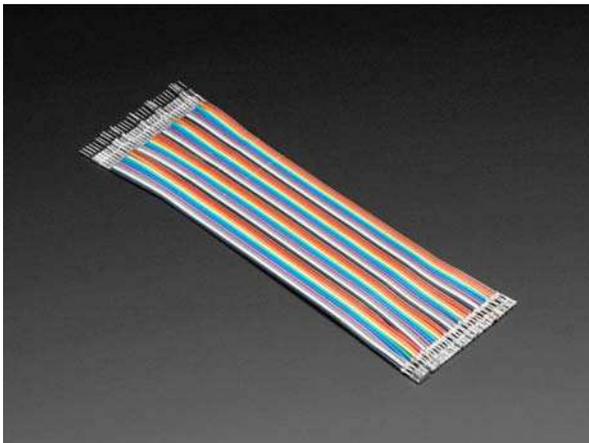

DESCRIPTION

Our Raw Male/Female Jumper Wires are perfect for making a custom jumper wire sets for wire harnesses or jumpering between headers on PCBs. These premium jumpers are a little over 6", almost 8" (about 200mm) long and come in a 'strip' of 40 (5 pieces of the ten rainbow colors).

The 0.75" raw sockets on either end are designed to be custom fitted with your choice of housing blocks to meet your prototyping needs. You can always pull the ribbon wires off to make individual jumpers, or keep them together to make neatly organized wire harnesses.

We have tons of different Jumper Wires available, in all shapes and sizes!

Note: The length of the jumper wires is sometimes a bit longer than what is listed.

TECHNICAL DETAILS

Each wire is 28 AWG (7 strands @ 36 AWG)

