



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## SPECIFICATION CONTROL DRAWING

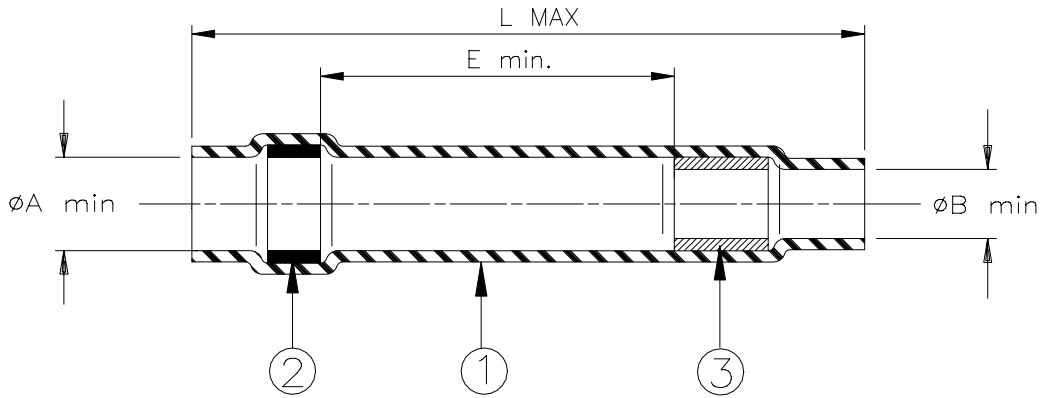

Product Revision		Product Dimensions				Cable Dimensions	
Product Name		L max	E min	øA min	øB min	øD min	øD max
D-108-06	F	127 (5.0)	73 (2.875)	8.9 (0.350)	7.5 (0.295)	4.5 (0.175)	7.5 (0.295)
D-108-07	E	127 (5.0)	74 (2.915)	10.2 (0.400)	8.8 (0.345)	5 (0.200)	8.8 (0.345)
D-108-08	E	131 (5.150)	74 (2.915)	12.7 (0.500)	11.3 (0.445)	7 (0.275)	11.3 (0.445)


### MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride
- SOLDER PREFORM WITH FLUX:  
 SOLDER: TYPE Sn96 per ANSI-J-STD-006.  
 FLUX: TYPE ROM1 per ANSI-J-STD-004.
- MELTABLE INSERT: Meltable thermoplastic. Color: clear.

### APPLICATION

- These parts are designed to attach an overshield to butt spliced shielded cables.
- Temperature range: -55°C to +150°C.

Cable dimensions: see table.



\* A trademark of Raychem Corporation.

<b>Raychem</b>		THERMOFIT DEVICES		Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		TITLE: <b>SOLDERSLEEVE* DEVICE</b>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO: <b>D-108-06/-08</b>	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D980906	
REPLACES: <b>D10807</b>		DRAWN BY: M. FORONDA		DATE: 06/29/98		PROD. REV. SEE TABLE	
SCALE: None		DOC ISSUE: 1		SIZE: A		SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.