



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# FMN CONNECTOR

1.0mm pitch/Connectors for FFC

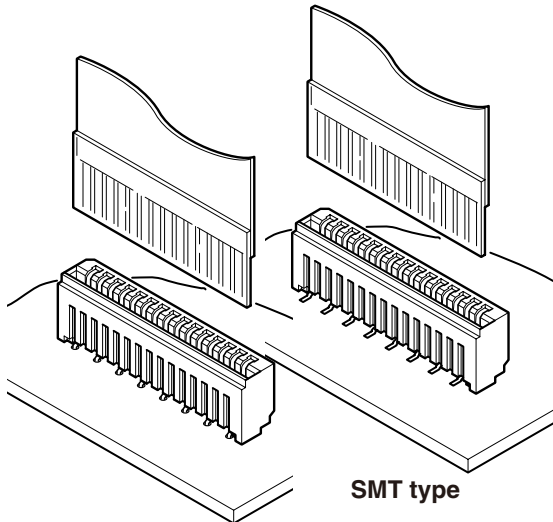

Through-hole type

SMT type

- Compact
- Low insertion force
- Both through-hole and SMT types are available
- Embossed tape for automatic mounting

## Specifications

- Current rating: 0.5A DC
- Voltage rating: 50V DC
- Temperature range: -25°C to +85°C  
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/30m Ω max.  
After environmental testing/50m Ω max.
- Insulation resistance: 500M Ω min.
- Withstanding voltage: 500V AC/minute
- Applicable FFC: Conductor pitch/1.0mm  
Conductor width/0.7mm  
Mating part thickness/0.3±0.05mm
- Applicable PC board thickness: 1.6mm

Note: FFC to be actually used should be checked for applicability.

\* Compliant with RoHS.

\* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.

\* Contact JST for details.

## Standards

Recognized E60389


Certified LR20812

## PC board layout (viewed from component side) and Assembly layout



### <Through-hole type>

#### Top entry type

##### Normal type




##### Reverse type





#### Side entry type

##### Normal type



##### Reverse type




### <SMT type>


#### Top entry type

##### <In-line>

##### Normal type




##### Reverse type





##### <Staggered>



##### Normal type



##### Reverse type



#### Side entry type




Note: 1. Tolerances are non-cumulative: ±0.05mm for all centers.  
2. Hole dimensions differ according to the kind of PC board and piercing method. The dimensions above should serve as a guideline. Contact JST for details.

Note: 1. Tolerances are non-cumulative: ±0.05mm for all centers.  
2. The dimensions above should serve as a guideline. Contact JST for details.

# FMN CONNECTOR


## Lead section dimensions of FFC

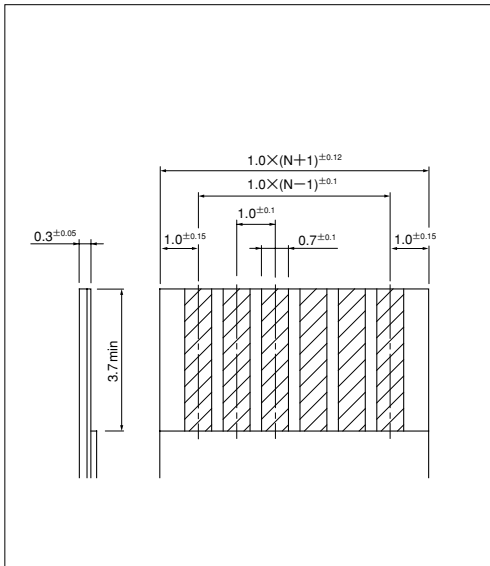

Note: N --- Number of circuits


## Through-hole type Connector

### Top entry type




<Note> Normal type: The solder tail for circuit No.1 contact is positioned in front.  
Reverse type: The solder tail for circuit No.1 contact is positioned behind.

### Side entry type

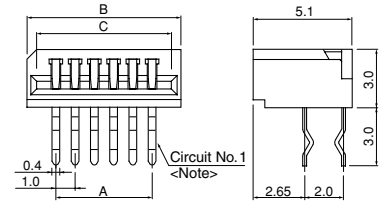

### Side entry type with stop

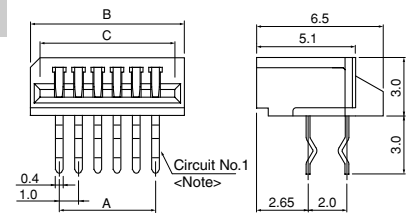

| Circuits | Model No.      |              |                 |              |                           |               | Dimensions (mm) |      |      | Q'ty / box     |                 |                           |
|----------|----------------|--------------|-----------------|--------------|---------------------------|---------------|-----------------|------|------|----------------|-----------------|---------------------------|
|          | Top entry type |              | Side entry type |              | Side entry type with stop |               | A               | B    | C    | Top entry type | Side entry type | Side entry type with stop |
|          | Normal type    | Reverse type | Normal type     | Reverse type | Normal type               | Reverse type  |                 |      |      |                |                 |                           |
| 4        | 04FMN-BTK-A    | 04FMN-BTRK-A | 04FMN-STK-A     | 04FMN-STRK-A | 04FMN-SSTK-A              | 04FMN-SSTRK-A | 3.0             | 6.0  | 5.0  | 3,600          | 2,160           | 2,520                     |
| 5        | 05FMN-BTK-A    | 05FMN-BTRK-A | 05FMN-STK-A     | 05FMN-STRK-A | 05FMN-SSTK-A              | 05FMN-SSTRK-A | 4.0             | 7.0  | 6.0  | 3,100          | 1,860           | 2,170                     |
| 6        | 06FMN-BTK-A    | 06FMN-BTRK-A | 06FMN-STK-A     | 06FMN-STRK-A | 06FMN-SSTK-A              | 06FMN-SSTRK-A | 5.0             | 8.0  | 7.0  | 2,700          | 1,620           | 1,890                     |
| 7        | 07FMN-BTK-A    | 07FMN-BTRK-A | 07FMN-STK-A     | 07FMN-STRK-A | 07FMN-SSTK-A              | 07FMN-SSTRK-A | 6.0             | 9.0  | 8.0  | 2,400          | 1,440           | 1,680                     |
| 8        | 08FMN-BTK-A    | 08FMN-BTRK-A | 08FMN-STK-A     | 08FMN-STRK-A | 08FMN-SSTK-A              | 08FMN-SSTRK-A | 7.0             | 10.0 | 9.0  | 2,100          | 1,260           | 1,470                     |
| 9        | 09FMN-BTK-A    | 09FMN-BTRK-A | 09FMN-STK-A     | 09FMN-STRK-A | 09FMN-SSTK-A              | 09FMN-SSTRK-A | 8.0             | 11.0 | 10.0 | 1,900          | 1,140           | 1,330                     |
| 10       | 10FMN-BTK-A    | 10FMN-BTRK-A | 10FMN-STK-A     | 10FMN-STRK-A | 10FMN-SSTK-A              | 10FMN-SSTRK-A | 9.0             | 12.0 | 11.0 | 1,800          | 1,080           | 1,260                     |
| 11       | 11FMN-BTK-A    | 11FMN-BTRK-A | 11FMN-STK-A     | 11FMN-STRK-A | 11FMN-SSTK-A              | 11FMN-SSTRK-A | 10.0            | 13.0 | 12.0 | 1,600          | 960             | 1,120                     |
| 12       | 12FMN-BTK-A    | 12FMN-BTRK-A | 12FMN-STK-A     | 12FMN-STRK-A | 12FMN-SSTK-A              | 12FMN-SSTRK-A | 11.0            | 14.0 | 13.0 | 1,500          | 900             | 1,050                     |
| 13       | 13FMN-BTK-A    | 13FMN-BTRK-A | 13FMN-STK-A     | 13FMN-STRK-A | 13FMN-SSTK-A              | 13FMN-SSTRK-A | 12.0            | 15.0 | 14.0 | 1,400          | 840             | 980                       |
| 14       | 14FMN-BTK-A    | 14FMN-BTRK-A | 14FMN-STK-A     | 14FMN-STRK-A | 14FMN-SSTK-A              | 14FMN-SSTRK-A | 13.0            | 16.0 | 15.0 | 1,300          | 780             | 910                       |
| 15       | 15FMN-BTK-A    | 15FMN-BTRK-A | 15FMN-STK-A     | 15FMN-STRK-A | 15FMN-SSTK-A              | 15FMN-SSTRK-A | 14.0            | 17.0 | 16.0 | 1,200          | 720             | 840                       |
| 16       | 16FMN-BTK-A    | 16FMN-BTRK-A | 16FMN-STK-A     | 16FMN-STRK-A | 16FMN-SSTK-A              | 16FMN-SSTRK-A | 15.0            | 18.0 | 17.0 | 1,200          | 720             | 840                       |
| 17       | 17FMN-BTK-A    | 17FMN-BTRK-A | 17FMN-STK-A     | 17FMN-STRK-A | 17FMN-SSTK-A              | 17FMN-SSTRK-A | 16.0            | 19.0 | 18.0 | 1,100          | 660             | 770                       |
| 18       | 18FMN-BTK-A    | 18FMN-BTRK-A | 18FMN-STK-A     | 18FMN-STRK-A | 18FMN-SSTK-A              | 18FMN-SSTRK-A | 17.0            | 20.0 | 19.0 | 1,000          | 600             | 700                       |
| 19       | 19FMN-BTK-A    | 19FMN-BTRK-A | 19FMN-STK-A     | 19FMN-STRK-A | 19FMN-SSTK-A              | 19FMN-SSTRK-A | 18.0            | 21.0 | 20.0 | 1,000          | 600             | 700                       |
| 20       | 20FMN-BTK-A    | 20FMN-BTRK-A | 20FMN-STK-A     | 20FMN-STRK-A | 20FMN-SSTK-A              | 20FMN-SSTRK-A | 19.0            | 22.0 | 21.0 | 900            | 540             | 630                       |
| 21       | 21FMN-BTK-A    | 21FMN-BTRK-A | 21FMN-STK-A     | 21FMN-STRK-A | 21FMN-SSTK-A              | 21FMN-SSTRK-A | 20.0            | 23.0 | 22.0 | 900            | 540             | 630                       |
| 22       | 22FMN-BTK-A    | 22FMN-BTRK-A | 22FMN-STK-A     | 22FMN-STRK-A | 22FMN-SSTK-A              | 22FMN-SSTRK-A | 21.0            | 24.0 | 23.0 | 900            | 540             | 630                       |
| 23       | 23FMN-BTK-A    | 23FMN-BTRK-A | 23FMN-STK-A     | 23FMN-STRK-A | 23FMN-SSTK-A              | 23FMN-SSTRK-A | 22.0            | 25.0 | 24.0 | 800            | 480             | 560                       |
| 24       | 24FMN-BTK-A    | 24FMN-BTRK-A | 24FMN-STK-A     | 24FMN-STRK-A | 24FMN-SSTK-A              | 24FMN-SSTRK-A | 23.0            | 26.0 | 25.0 | 800            | 480             | 560                       |
| 25       | 25FMN-BTK-A    | 25FMN-BTRK-A | 25FMN-STK-A     | 25FMN-STRK-A | 25FMN-SSTK-A              | 25FMN-SSTRK-A | 24.0            | 27.0 | 26.0 | 800            | 480             | 560                       |
| 26       | 26FMN-BTK-A    | 26FMN-BTRK-A | 26FMN-STK-A     | 26FMN-STRK-A | 26FMN-SSTK-A              | 26FMN-SSTRK-A | 25.0            | 28.0 | 27.0 | 700            | 420             | 490                       |
| 27       | 27FMN-BTK-A    | 27FMN-BTRK-A | 27FMN-STK-A     | 27FMN-STRK-A | 27FMN-SSTK-A              | 27FMN-SSTRK-A | 26.0            | 29.0 | 28.0 | 700            | 420             | 490                       |
| 28       | 28FMN-BTK-A    | 28FMN-BTRK-A | 28FMN-STK-A     | 28FMN-STRK-A | 28FMN-SSTK-A              | 28FMN-SSTRK-A | 27.0            | 30.0 | 29.0 | 700            | 420             | 490                       |
| 29       | 29FMN-BTK-A    | 29FMN-BTRK-A | 29FMN-STK-A     | 29FMN-STRK-A | 29FMN-SSTK-A              | 29FMN-SSTRK-A | 28.0            | 31.0 | 30.0 | 700            | 420             | 490                       |
| 30       | 30FMN-BTK-A    | 30FMN-BTRK-A | 30FMN-STK-A     | 30FMN-STRK-A | 30FMN-SSTK-A              | 30FMN-SSTRK-A | 29.0            | 32.0 | 31.0 | 600            | 360             | 420                       |
| 31       | 31FMN-BTK-A    | 31FMN-BTRK-A | 31FMN-STK-A     | 31FMN-STRK-A | 31FMN-SSTK-A              | 31FMN-SSTRK-A | 30.0            | 33.0 | 32.0 | 600            | 360             | 420                       |
| 32       | 32FMN-BTK-A    | 32FMN-BTRK-A | 32FMN-STK-A     | 32FMN-STRK-A | 32FMN-SSTK-A              | 32FMN-SSTRK-A | 31.0            | 34.0 | 33.0 | 600            | 360             | 420                       |
| 33       | 33FMN-BTK-A    | 33FMN-BTRK-A | 33FMN-STK-A     | 33FMN-STRK-A | 33FMN-SSTK-A              | 33FMN-SSTRK-A | 32.0            | 35.0 | 34.0 | 600            | 360             | 420                       |
| 34       | 34FMN-BTK-A    | 34FMN-BTRK-A | 34FMN-STK-A     | 34FMN-STRK-A | 34FMN-SSTK-A              | 34FMN-SSTRK-A | 33.0            | 36.0 | 35.0 | 600            | 360             | 420                       |
| 35       | 35FMN-BTK-A    | 35FMN-BTRK-A | 35FMN-STK-A     | 35FMN-STRK-A | 35FMN-SSTK-A              | 35FMN-SSTRK-A | 34.0            | 37.0 | 36.0 | 500            | 300             | 350                       |
| 36       | 36FMN-BTK-A    | 36FMN-BTRK-A | 36FMN-STK-A     | 36FMN-STRK-A | 36FMN-SSTK-A              | 36FMN-SSTRK-A | 35.0            | 38.0 | 37.0 | 500            | 300             | 350                       |
| 37       | 37FMN-BTK-A    | 37FMN-BTRK-A | 37FMN-STK-A     | 37FMN-STRK-A | 37FMN-SSTK-A              | 37FMN-SSTRK-A | 36.0            | 39.0 | 38.0 | 500            | 300             | 350                       |
| 38       | 38FMN-BTK-A    | 38FMN-BTRK-A | 38FMN-STK-A     | 38FMN-STRK-A | 38FMN-SSTK-A              | 38FMN-SSTRK-A | 37.0            | 40.0 | 39.0 | 500            | 300             | 350                       |
| 39       | 39FMN-BTK-A    | 39FMN-BTRK-A | 39FMN-STK-A     | 39FMN-STRK-A | 39FMN-SSTK-A              | 39FMN-SSTRK-A | 38.0            | 41.0 | 40.0 | 500            | 300             | 350                       |
| 40       | 40FMN-BTK-A    | 40FMN-BTRK-A | 40FMN-STK-A     | 40FMN-STRK-A | 40FMN-SSTK-A              | 40FMN-SSTRK-A | 39.0            | 42.0 | 41.0 | 500            | 300             | 350                       |

### Material and Finish

Contact: Phosphor bronze, copper-undercoated, tin-plated (reflow treatment)

Housing: 4 to 22 circuits/PBT, UL94V-0, Normal type...gray Reverse type...brown

23 to 40 circuits/PA 6T, UL94V-0, Normal type...gray Reverse type...black

RoHS compliance This product displays (LF)(SN) on a label.


# FMN CONNECTOR

## SMT type Connector


### Top entry type

#### <In-line>

#### Normal type




#### Reverse type




#### <Staggered>



#### Normal type



#### Reverse type



### Side entry type

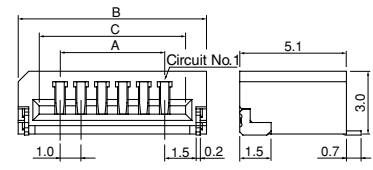

| Circuits | Model No.      |                 |                  |                  | Dimensions (mm) |                |                 | Q'ty / reel    |                 |       |       |
|----------|----------------|-----------------|------------------|------------------|-----------------|----------------|-----------------|----------------|-----------------|-------|-------|
|          | Top entry type |                 |                  |                  | Side entry type | B              |                 | Top entry type | Side entry type |       |       |
|          | Single-row     |                 | Staggered        |                  |                 | Top entry type | Side entry type |                |                 |       |       |
|          | Normal type    | Reverse type    | Normal type      | Reverse type     | A               |                | C               |                |                 |       |       |
| 4        | 04FMN-BMT-A-TF | 04FMN-BMTR-A-TB | 04FMN-BMTTN-A-TF | 04FMN-BMTTR-A-TB | 04FMN-SMT-A-TF  | 3.0            | 6.0             | 7.0            | 5.0             | 1,000 | 2,000 |
| 5        | 05FMN-BMT-A-TF | 05FMN-BMTR-A-TB | 05FMN-BMTTN-A-TF | 05FMN-BMTTR-A-TB | 05FMN-SMT-A-TF  | 4.0            | 7.0             | 8.0            | 6.0             | 1,000 | 2,000 |
| 6        | 06FMN-BMT-A-TF | 06FMN-BMTR-A-TB | 06FMN-BMTTN-A-TF | 06FMN-BMTTR-A-TB | 06FMN-SMT-A-TF  | 5.0            | 8.0             | 9.0            | 7.0             | 1,000 | 2,000 |
| 7        | 07FMN-BMT-A-TF | 07FMN-BMTR-A-TB | 07FMN-BMTTN-A-TF | 07FMN-BMTTR-A-TB | 07FMN-SMT-A-TF  | 6.0            | 9.0             | 10.0           | 8.0             | 1,000 | 2,000 |
| 8        | 08FMN-BMT-A-TF | 08FMN-BMTR-A-TB | 08FMN-BMTTN-A-TF | 08FMN-BMTTR-A-TB | 08FMN-SMT-A-TF  | 7.0            | 10.0            | 11.0           | 9.0             | 1,000 | 2,000 |
| 9        | 09FMN-BMT-A-TF | 09FMN-BMTR-A-TB | 09FMN-BMTTN-A-TF | 09FMN-BMTTR-A-TB | 09FMN-SMT-A-TF  | 8.0            | 11.0            | 12.0           | 10.0            | 1,000 | 2,000 |
| 10       | 10FMN-BMT-A-TF | 10FMN-BMTR-A-TB | 10FMN-BMTTN-A-TF | 10FMN-BMTTR-A-TB | 10FMN-SMT-A-TF  | 9.0            | 12.0            | 13.0           | 11.0            | 1,000 | 2,000 |
| 11       | 11FMN-BMT-A-TF | 11FMN-BMTR-A-TB | 11FMN-BMTTN-A-TF | 11FMN-BMTTR-A-TB | 11FMN-SMT-A-TF  | 10.0           | 13.0            | 14.0           | 12.0            | 1,000 | 2,000 |
| 12       | 12FMN-BMT-A-TF | 12FMN-BMTR-A-TB | 12FMN-BMTTN-A-TF | 12FMN-BMTTR-A-TB | 12FMN-SMT-A-TF  | 11.0           | 14.0            | 15.0           | 13.0            | 1,000 | 2,000 |
| 13       | 13FMN-BMT-A-TF | 13FMN-BMTR-A-TB | 13FMN-BMTTN-A-TF | 13FMN-BMTTR-A-TB | 13FMN-SMT-A-TF  | 12.0           | 15.0            | 16.0           | 14.0            | 1,000 | 2,000 |
| 14       | 14FMN-BMT-A-TF | 14FMN-BMTR-A-TB | 14FMN-BMTTN-A-TF | 14FMN-BMTTR-A-TB | 14FMN-SMT-A-TF  | 13.0           | 16.0            | 17.0           | 15.0            | 1,000 | 2,000 |
| 15       | 15FMN-BMT-A-TF | 15FMN-BMTR-A-TB | 15FMN-BMTTN-A-TF | 15FMN-BMTTR-A-TB | 15FMN-SMT-A-TF  | 14.0           | 17.0            | 18.0           | 16.0            | 1,000 | 2,000 |
| 16       | 16FMN-BMT-A-TF | 16FMN-BMTR-A-TB | 16FMN-BMTTN-A-TF | 16FMN-BMTTR-A-TB | 16FMN-SMT-A-TF  | 15.0           | 18.0            | 19.0           | 17.0            | 1,000 | 2,000 |
| 17       | 17FMN-BMT-A-TF | 17FMN-BMTR-A-TB | 17FMN-BMTTN-A-TF | 17FMN-BMTTR-A-TB | 17FMN-SMT-A-TF  | 16.0           | 19.0            | 20.0           | 18.0            | 1,000 | 2,000 |
| 18       | 18FMN-BMT-A-TF | 18FMN-BMTR-A-TB | 18FMN-BMTTN-A-TF | 18FMN-BMTTR-A-TB | 18FMN-SMT-A-TF  | 17.0           | 20.0            | 21.0           | 19.0            | 1,000 | 2,000 |
| 19       | 19FMN-BMT-A-TF | 19FMN-BMTR-A-TB | 19FMN-BMTTN-A-TF | 19FMN-BMTTR-A-TB | 19FMN-SMT-A-TF  | 18.0           | 21.0            | 22.0           | 20.0            | 1,000 | 2,000 |
| 20       | 20FMN-BMT-A-TF | 20FMN-BMTR-A-TB | 20FMN-BMTTN-A-TF | 20FMN-BMTTR-A-TB | 20FMN-SMT-A-TF  | 19.0           | 22.0            | 23.0           | 21.0            | 1,000 | 2,000 |
| 21       | 21FMN-BMT-A-TF | 21FMN-BMTR-A-TB | 21FMN-BMTTN-A-TF | 21FMN-BMTTR-A-TB | 21FMN-SMT-A-TF  | 20.0           | 23.0            | 24.0           | 22.0            | 1,000 | 2,000 |
| 22       | 22FMN-BMT-A-TF | 22FMN-BMTR-A-TB | 22FMN-BMTTN-A-TF | 22FMN-BMTTR-A-TB | 22FMN-SMT-A-TF  | 21.0           | 24.0            | 25.0           | 23.0            | 1,000 | 2,000 |
| 23       | 23FMN-BMT-A-TF | 23FMN-BMTR-A-TB | 23FMN-BMTTN-A-TF | 23FMN-BMTTR-A-TB | 23FMN-SMT-A-TF  | 22.0           | 25.0            | 26.0           | 24.0            | 1,000 | 2,000 |
| 24       | 24FMN-BMT-A-TF | 24FMN-BMTR-A-TB | 24FMN-BMTTN-A-TF | 24FMN-BMTTR-A-TB | 24FMN-SMT-A-TF  | 23.0           | 26.0            | 27.0           | 25.0            | 1,000 | 2,000 |
| 25       | 25FMN-BMT-A-TF | 25FMN-BMTR-A-TB | 25FMN-BMTTN-A-TF | 25FMN-BMTTR-A-TB | 25FMN-SMT-A-TF  | 24.0           | 27.0            | 28.0           | 26.0            | 1,000 | 2,000 |
| 26       | 26FMN-BMT-A-TF | 26FMN-BMTR-A-TB | 26FMN-BMTTN-A-TF | 26FMN-BMTTR-A-TB | 26FMN-SMT-A-TF  | 25.0           | 28.0            | 29.0           | 27.0            | 1,000 | 2,000 |
| 27       | 27FMN-BMT-A-TF | 27FMN-BMTR-A-TB | 27FMN-BMTTN-A-TF | 27FMN-BMTTR-A-TB | 27FMN-SMT-A-TF  | 26.0           | 29.0            | 30.0           | 28.0            | 1,000 | 2,000 |
| 28       | 28FMN-BMT-A-TF | 28FMN-BMTR-A-TB | 28FMN-BMTTN-A-TF | 28FMN-BMTTR-A-TB | 28FMN-SMT-A-TF  | 27.0           | 30.0            | 31.0           | 29.0            | 1,000 | 2,000 |
| 29       | 29FMN-BMT-A-TF | 29FMN-BMTR-A-TB | 29FMN-BMTTN-A-TF | 29FMN-BMTTR-A-TB | 29FMN-SMT-A-TF  | 28.0           | 31.0            | 32.0           | 30.0            | 1,000 | 2,000 |
| 30       | 30FMN-BMT-A-TF | 30FMN-BMTR-A-TB | 30FMN-BMTTN-A-TF | 30FMN-BMTTR-A-TB | 30FMN-SMT-A-TF  | 29.0           | 32.0            | 33.0           | 31.0            | 1,000 | 2,000 |
| 31       | 31FMN-BMT-A-TF | 31FMN-BMTR-A-TB | 31FMN-BMTTN-A-TF | 31FMN-BMTTR-A-TB | 31FMN-SMT-A-TF  | 30.0           | 33.0            | 34.0           | 32.0            | 1,000 | 2,000 |
| 32       | 32FMN-BMT-A-TF | 32FMN-BMTR-A-TB | 32FMN-BMTTN-A-TF | 32FMN-BMTTR-A-TB | 32FMN-SMT-A-TF  | 31.0           | 34.0            | 35.0           | 33.0            | 1,000 | 2,000 |
| 33       | 33FMN-BMT-A-TF | 33FMN-BMTR-A-TB | 33FMN-BMTTN-A-TF | 33FMN-BMTTR-A-TB | 33FMN-SMT-A-TF  | 32.0           | 35.0            | 36.0           | 34.0            | 1,000 | 2,000 |
| 34       | 34FMN-BMT-A-TF | 34FMN-BMTR-A-TB | 34FMN-BMTTN-A-TF | 34FMN-BMTTR-A-TB | 34FMN-SMT-A-TF  | 33.0           | 36.0            | 37.0           | 35.0            | 1,000 | 2,000 |
| 35       | 35FMN-BMT-A-TF | 35FMN-BMTR-A-TB | 35FMN-BMTTN-A-TF | 35FMN-BMTTR-A-TB | 35FMN-SMT-A-TF  | 34.0           | 37.0            | 38.0           | 36.0            | 1,000 | 2,000 |
| 36       | 36FMN-BMT-A-TF | 36FMN-BMTR-A-TB | 36FMN-BMTTN-A-TF | 36FMN-BMTTR-A-TB | 36FMN-SMT-A-TF  | 35.0           | 38.0            | 39.0           | 37.0            | 1,000 | 2,000 |
| 37       | 37FMN-BMT-A-TF | 37FMN-BMTR-A-TB | 37FMN-BMTTN-A-TF | 37FMN-BMTTR-A-TB | 37FMN-SMT-A-TF  | 36.0           | 39.0            | 40.0           | 38.0            | 1,000 | 2,000 |
| 38       | 38FMN-BMT-A-TF | 38FMN-BMTR-A-TB | 38FMN-BMTTN-A-TF | 38FMN-BMTTR-A-TB | 38FMN-SMT-A-TF  | 37.0           | 40.0            | 41.0           | 39.0            | 1,000 | 2,000 |
| 39       | 39FMN-BMT-A-TF | 39FMN-BMTR-A-TB | 39FMN-BMTTN-A-TF | 39FMN-BMTTR-A-TB | 39FMN-SMT-A-TF  | 38.0           | 41.0            | 42.0           | 40.0            | 1,000 | 2,000 |
| 40       | 40FMN-BMT-A-TF | 40FMN-BMTR-A-TB | 40FMN-BMTTN-A-TF | 40FMN-BMTTR-A-TB | 40FMN-SMT-A-TF  | 39.0           | 42.0            | 43.0           | 41.0            | 1,000 | 2,000 |

#### Material and Finish

Contact: Phosphor bronze, copper-undercoated, tin-plated (reflow treatment)  
Housing: PA 6T, UL94V-0, black  
Solder tab: Brass, copper-undercoated, tin-plated (reflow treatment)

**RoHS compliance** This product displays (LF)(SN) on a label.

- Note: 1. The products listed above are supplied on embossed tape.  
2. Contact JST for the top entry type headers with suction cap.