

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

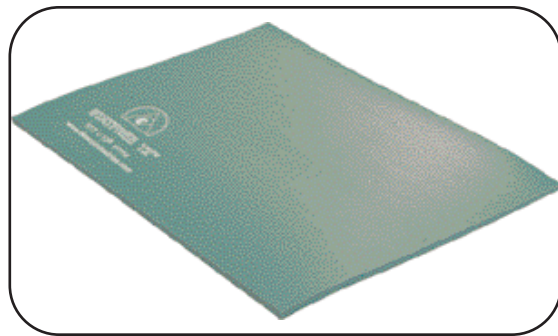

Green


Description:

A proprietary product with premium features, Statfree Z2™ material is a highly effective three-layer material. Its durable vinyl top layer makes it ideally suited for use as an ESD protective bench mat. Its highly conductive middle layer provides a faster discharge path to ground. The cushioned dissipative bottom layer provides excellent protection against physical damage, and makes it easier to pick up small parts. The heat fused vinyl composite resists delamination, and is compatible for use with continuous monitors. Statfree Z2™ meets the ESD worksurface requirements of ANSI/ESD S20.20 and recommendation of ESD S4.1. **The green material identifies the worksurface as a Lead-Free work zone.**



Statfree Z2™ is manufactured without any ozone depleting substances, and is in accordance with the Montreal Protocol.

See reverse side for available mat and roll sizes.

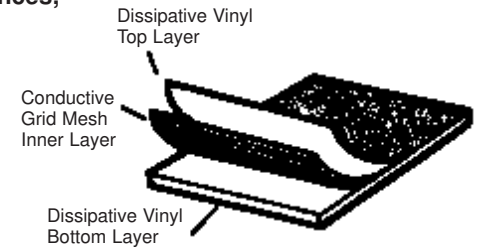

Electrical Properties:

Property	Test Method	Value
Charge Decay:	FTMS 101C, M 4046	<0.01sec.
RTT Resistance:	ESD S4.1	10E6 - 10E8 Ohms
RTG Resistance:	ESD S4.1	10E6 - 10E8 Ohms

Electrical Properties obtained by testing to industrial standards by an independent testing laboratory @ 100 Volts and 50% relative humidity unless otherwise specified. Complete text of the test report is available upon request.

Disclaimer:

All statements, technical data, and recommendations contained herein are based upon tests we believe to be reliable. However, the accuracy or completeness thereof is not guaranteed. The proper and correct applications of products and data is the responsibility of the user. Statements or recommendations not contained herein shall have no force or effect unless embodied in a written agreement signed by authorized offers of Desco Industries, Inc.

RoHS Compliance Statement

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See Desco Industries Inc. letter on-line at Desco.com.

Specifications:

- Construction: Heat fused vinyl composite
- Thickness: 0.125" (3.2mm)
- Color:* Green
- Texture:* Light Embossing
- Hardness: 45 Shore "A", per ASTM-D412
- Tensile Strength: Greater than 300 psi, per ASTM-D412
- Tear Strength: Greater than 80 lbs/inch, per ASTM-D624
- Elongation: Greater than 80%, per ASTM-D412
- Abrasion Resistance: Greater than 750 cycles, per Tabor-CS17
- Heat Resistance: -20°F to 140°F continuous
- Chemical Resistance: Resistance to degradation by inorganic acids, organic acids, reducing agents, aliphatic hydrocarbons, mineral oil, aldehydes, and amines


*Color and texture may vary between lots and mills

Grounding: This material must be properly grounded for optimum electrical performance. Ask for Technical Bulletin TB-2000 for mat grounding instructions.

Cleaning: For optimum electrical performance, surface must be cleaned regularly using an ESD mat cleaner. We suggest using our Reztore™ Surface & Mat Cleaner Item #10435 or Static Wipes Item #10600. Do not use cleaners with silicone. Silicone buildup will create an insulative film on the surface.

Limited Lifetime Warranty:

Desco warrants for one year that Statfree® matting products will be free of defects in materials and workmanship and will guarantee dissipative/conductive mat properties for the life of the mat. Damage to matting caused by misuse of any kind, including using inappropriate cleaners is not covered by Desco Limited Warranty.



Made in America

Meets the requirements of DOD-HDBK-263, DTD-STD-1686A, DOD-STD-2000, MIL-W-87893, ESD S4.1.

STATFREE Z2™, VINYL, DISSIPATIVE, 3-LAYER, .125" (3.2MM)

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: www.desco.com
PHONE (909) 627-8178 FAX (909) 627-7449

DESCO EAST: 90 HUDSON RD, CANTON, MA 02021-1407
PHONE (781) 821-8370 FAX (781) 575-0172

STATFREE Z2™

DRAWING PM-123

DATE:
02/06

DESCO

Item Number Reference For Statfree Z2™ Vinyl, Dissipative, 3-Layer

KITS



Mat Top Kit Item Numbers

SIZE	Green
24" x 48"	42480

MAT TOP KIT INCLUDES

- 1 Benchmat, Statfree Z2™, size as specified
- 1 14213, Common point kit w/snap, customer installed

Lead Free Workstation

Statfree Z2™ Lead-Free Rubber is laser engraved with "Lead-Free Workstation" to designate the area as free of lead.

Matting materials have a tendency to shrink slightly when first unrolled. In applications where length is critical, allow the material to relax for at least 4 hours before cutting to size. Always trim with a sharp knife or razor blade.

Tolerances:
 Width ± .250"
 Length ± .250" every 1 linear foot of running material.

ROLL STOCK



Statfree Z2™
 Is Also
 Available In
 Full
 Rolls

0.125" (3.2mm)
 THICK ROLLS



Roll Material Item Numbers

SIZE	GREEN
24" x 50'	42535

Hardware is not included with rolls.

Grounding Intervals for ESD Mats

Sufficient ground cords should be used to reliably meet ANSI/ESD S20.20 Table 1 less than 1 x 10E9 ohms for worksurfaces. An industry recommendation has been that continuous runs of ESD matting should be grounded at ten-foot intervals to allow proper charge decay rates with each individual ESD mat should be grounded with ground snap located no further than five feet from either end.

