



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






FEATURES

Low ESR - High AC/Ripple Current - Stable with frequency and temperature

APPLICATIONS

Switching Power Supplies - General Purpose - AC Applications (Not across the Line)

Operating Temperature Range	-55°C to +105°C				
Capacitance Tolerance	±10% at 1 kHz, 25°C ±5% optional				
AC Voltage	WVDC	160	250	400	630
	VAC	90	200	220	250
For T>+85°C , The voltage must be decreased by 1.5% per °C					
Dissipation Factor (MAX) 1 kHz, 25°C	0.001				
Insulation Resistance @25°C (<70% RH)for 1 minute at 100VDC applied	Capacitance	Insulation Resistance			
	≤0.33µF	30000 MΩ			
	>0.33µF	10000 MΩxµF			
Load Life	2000 Hours, +85C with 125% of rated voltage				
	Capacitance Change	≤3% of initially measured value			
	Dissipation Factor	<0.001 at 1kHz and 25°C			
	Insulation Resistance	≥50% of maximum specified value			
Damp Heat test	56 days at40°C with 90 to 95%RH, +40°C and no voltage applied				
	Capacitance Change	≤5% of initially measured value			
	Dissipation Factor	≤0.005 at 1kHz and 25°C			
	Insulation Resistance	≥50% of maximum specified value			
Self Inductance	<1 nano-Henry per mm of body length and lead length				
Capacitance Drift Factor	<0.5% after 2 years at 40°C				
Capacitance Temperature Coefficient	-200 ppm/°C, ±100ppm/°C				
Dielectric Strength	Terminal to Terminal				
	200% of rated VDC or VAC applied for 10 Seconds and 25°C				
Dielectric	Polypropylene				
Construction	Metallized film				
Coating	Flame Retardant Polyester tape wrap (UL 510) with epoxy resin end fills(UL94V0)				
Leads	Lead free tinned copper leads				

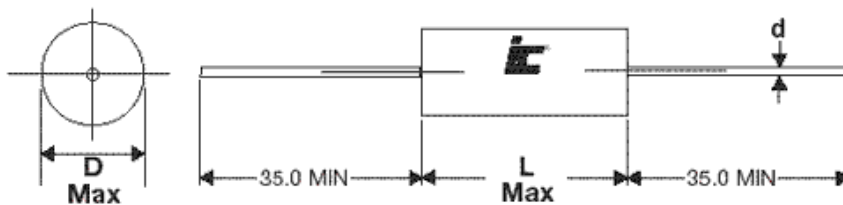

Lead Diameter	
D	d
≤9	0.6
>9	0.8

MPW

Metallized Polypropylene Axial Lead

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims DxL (mm)	d (MM)
0.001	630	102MPW630K	22	6.5x14.5	0.6
0.0015	400	152MPW400K	15	6.5x14.5	0.6
0.0015	630	152MPW630K	22	6.5x14.5	0.6
0.0022	400	222MPW400K	15	5.5x11.5	0.6
0.0022	630	222MPW630K	22	6.5x14.5	0.6
0.0033	400	332MPW400K	15	6.5x14.5	0.6
0.0033	630	332MPW630K	22	6.5x14.5	0.6
0.0047	400	472MPW400K	15	6.5x14.5	0.6
0.0047	630	472MPW630K	22	6x14.5	0.6
0.0068	400	682MPW400K	15	5.5x11.5	0.6
0.0068	630	682MPW630K	22	6x14.5	0.6
0.0082	400	822MPW400K	15	6.5x14.5	0.6
0.0082	630	822MPW630K	22	6x14.5	0.6
0.01	400	103MPW400K	15	6x14.5	0.6
0.01	630	103MPW630K	22	6.5x14.5	0.6
0.015	250	153MPW250K	12	5.5x14.5	0.6
0.015	400	153MPW400K	15	6.5x14.5	0.6
0.015	630	153MPW630K	22	7.5x14.5	0.6
0.022	160	223MPW160K	22	5.5x11.5	0.6
0.022	250	223MPW250K	12	7x14	0.6
0.022	400	223MPW400K	15	7x14.5	0.6
0.022	630	223MPW630K	22	8.5x14.5	0.8
0.033	160	333MPW160K	22	5.5x11.5	0.6
0.033	250	333MPW250K	12	6.5x14.5	0.6
0.033	400	333MPW400K	15	7.5x14.5	0.6
0.033	630	333MPW630K	16	8.5x20.5	0.8
0.047	160	473MPW160K	22	5.5x11.5	0.6
0.047	250	473MPW250K	12	6.5x14.5	0.6
0.047	400	473MPW400K	15	8.5x14.5	0.8
0.047	630	473MPW630K	16	9x20.5	0.8
0.068	160	683MPW160K	22	6.5x14.5	0.6
0.068	250	683MPW250K	12	7.5x14.5	0.6
0.068	400	683MPW400K	12	8.5x20.5	0.8
0.068	630	683MPW630K	12	9x29	0.8
0.1	160	104MPW160K	22	6.5x14.5	0.6
0.1	250	104MPW250K	12	8.5x14.5	0.8
0.1	400	104MPW400K	12	8.5x20.5	0.8
0.1	630	104MPW630K	12	10.5x29	0.8

Capacitance (μF)	WVDC	IC PART NUMBER	dv/dt (v/μ sec.)	Dims DxL (mm)	d (MM)
0.15	160	154MPW160K	22	7.5x14.5	0.6
0.15	250	154MPW250K	8	8x20.5	0.6
0.15	400	154MPW400K	7	9.5x29	0.8
0.15	630	154MPW630K	12	12x29	0.8
0.22	160	224MPW160K	22	8x14.5	0.6
0.22	250	224MPW250K	8	9.5x20.5	0.8
0.22	400	224MPW400K	7	10.5x29	0.8
0.22	630	224MPW630K	7	12.5x34	0.8
0.33	160	334MPW160K	18	8.5x20.5	0.8
0.33	250	334MPW250K	5	10x29	0.8
0.33	400	334MPW400K	7	12.5x29	0.8
0.33	630	334MPW630K	7	15.5x34	0.8
0.47	160	474MPW160K	18	9.5x20.5	0.8
0.47	250	474MPW250K	5	11x29	0.8
0.47	400	474MPW400K	7	14x29	0.8
0.47	630	474MPW630K	7	18x34	0.8
0.68	160	684MPW160K	11	10x29	0.8
0.68	250	684MPW250K	5	12.5x29	0.8
0.68	400	684MPW400K	5	15x34	0.8
0.68	630	684MPW630K	7	22x34	1
1	160	105MPW160K	11	11x29	0.8
1	250	105MPW250K	3	13x34	0.8
1	400	105MPW400K	5	17.5x34	0.8
1.5	160	155MPW160K	11	13x29	0.8
1.5	250	155MPW250K	8	16x34	0.8
1.5	400	155MPW400K	5	20.5x34	1
2.2	160	225MPW160K	8	13.5x34	0.8
2.2	250	225MPW250K	3	19x34	0.8
2.2	400	225MPW400K	3	24x46	1
3.3	160	335MPW160K	8	16x34	0.8
3.3	250	335MPW250K	2	17x47	0.8
3.3	400	335MPW400K	3	26x44	1
4.7	160	475MPW160K	8	18x34	0.8
4.7	250	475MPW250K	2	22.5x47	1
4.7	400	475MPW400K	3	28.5x47	1
6.8	160	685MPW160K	8	18.5x46.5	0.8
10	160	106MPW160K	8	22.5x46.5	1