



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PART OBSOLETE - EOL18

Bulletin I2716 rev. F 06/03

International
IOR Rectifier

4GBL Series

4.0 Amps Single Phase Full Wave

Bridge Rectifier

Features

- Diode chips are glass passivated
- Easy to assemble & install on P.C.B.
- High Surge Current Capability
- High Isolation between terminals and molded case (1500 V_{RMS})
- Lead free terminals solderable as per MIL-STD-750 Method 2026
- Terminals suitable for high temperature soldering at 260°C for 8-10 secs
- UL E160375 approved

$$I_{O(AV)} = 4A$$
$$V_{RRM} = 50/ 800V$$

Description

These GBL Series of Single Phase Bridges consist of four glass passivated silicon junction connected as a Full Wave Bridge. These four junctions are encapsulated by plastic molding technique. These Bridges are mainly used in Switch Mode power supply and in industrial and consumer equipment.

Major Ratings and Characteristics

Parameters	4GBL	Units
I_O	4	A
@ T_C	50	°C
I_{FSM}	150	A
@ 50Hz	158	A
@ 60Hz	113	A ² s
I^2t	104	A ² s
V_{RRM} range	50 to 800	V
T_J	- 55 to 150	°C



4GBL

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , max repetitive peak rev. voltage $T_J = T_J \text{ max.}$ V	V_{RMS} , maximum RMS voltage $T_J = T_J \text{ max.}$ V	V_{RSM} , max non-repetitive reverse voltage $T_J = T_J \text{ max.}$ V	I_{RRM} max. @ rated V_{RRM} $T_J = 25^\circ\text{C}$ μA	I_{RRM} max. @ rated V_{RRM} $T_J = 150^\circ\text{C}$ μA
4GBL	005	50	35	75	5	400
	01	100	70	150	5	400
	02	200	140	275	5	400
	04	400	280	500	5	400
	06	600	420	725	5	400
	08	800	560	900	5	400

Forward Conduction


Parameters	4GBL	Unit	Conditions
I_O Maximum DC output current	4	A	$T_C = 50^\circ\text{C}$, Resistive & inductive load
	3.2		$T_C = 50^\circ\text{C}$, Capacitive load
I_{FSM} Maximum peak, one-cycle non-repetitive surge current, following any rated load condition and with rated V_{RRM} reapplied	150		$t = 10\text{ms}, 20\text{ms}$
	158		$t = 8.3\text{ms}, 16.7\text{ms}$ $T_J = 150^\circ\text{C}$
I^2t Maximum I^2t for fusing, initial $T_J = T_J \text{ max}$	113	A^2s	$t = 10\text{ms}$
	104		$t = 8.3\text{ms}$
V_{FM} Maximum peak forward voltage per diode	0.975	V	$T_J = 25^\circ\text{C}$, $I_{FM} = 4\text{A}$
I_{RM} Typical peak reverse leakage current t per diode	5	μA	$T_J = 25^\circ\text{C}$, 100% V_{RRM}
V_{RRM} Maximum repetitive peak reverse voltage range	50 to 800	V	

Thermal and Mechanical Specifications


Parameters	4GBL	Unit	Conditions
T_J Operating and storage temperature range	-55 to 150	$^\circ\text{C}$	
R_{thJC} Max. thermal resistance junction to case	6.5	$^\circ\text{C}/\text{W}$	DC rated current through bridge (1)
R_{thJA} Thermal resistance, junction to ambient	22	$^\circ\text{C}/\text{W}$	DC rated current through bridge (1)
W Approximate weight	2 (0.07)	g (oz)	

Note (1): Devices mounted on 75 x 75 x 3 mm aluminum plate

Ordering Information Table

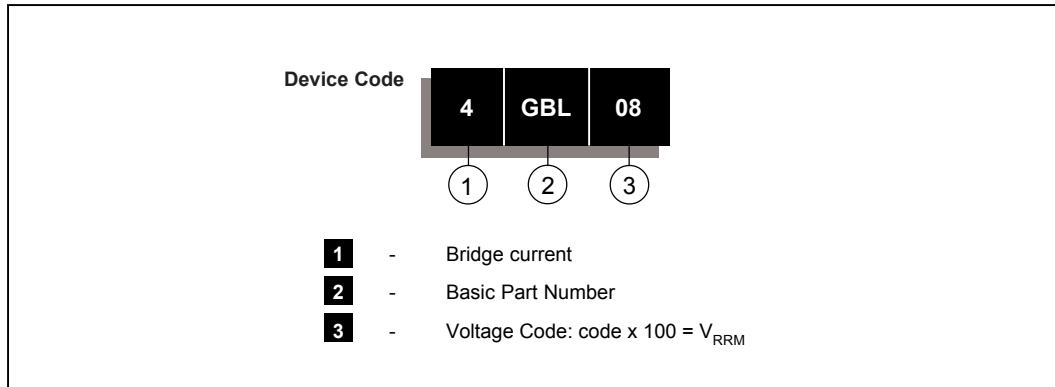

Outline Table

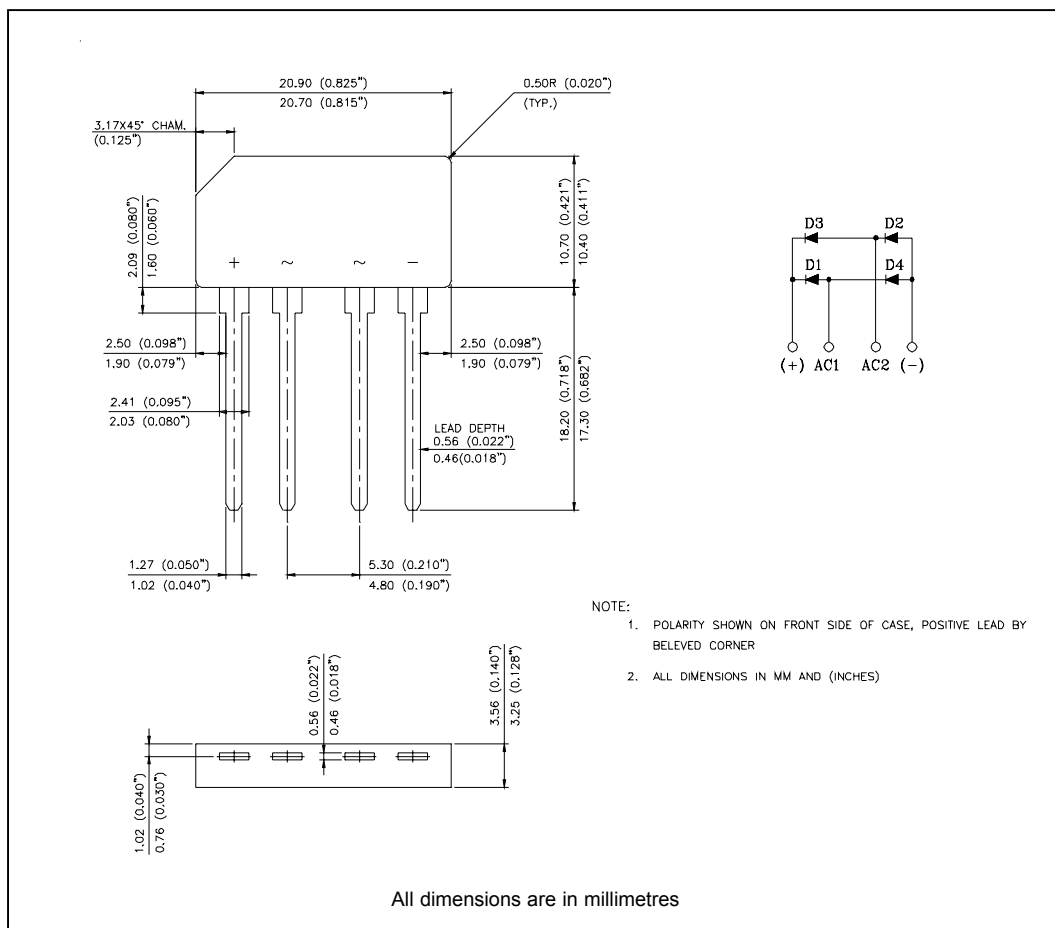

NOTE:
 1. POLARITY SHOWN ON FRONT SIDE OF CASE, POSITIVE LEAD BY BEVELED CORNER
 2. ALL DIMENSIONS IN MM AND (INCHES)

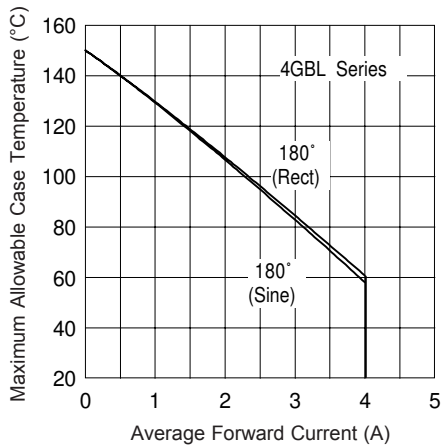


Fig. 1 - Current Ratings Characteristics

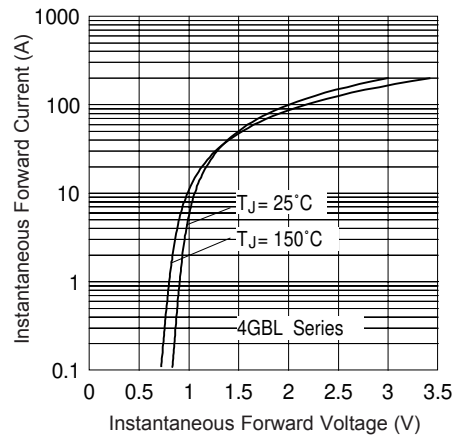


Fig. 2 - Forward Voltage Drop Characteristics

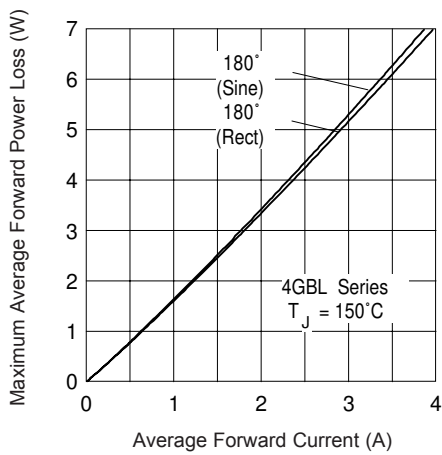


Fig. 3 - Total Power Loss Characteristics

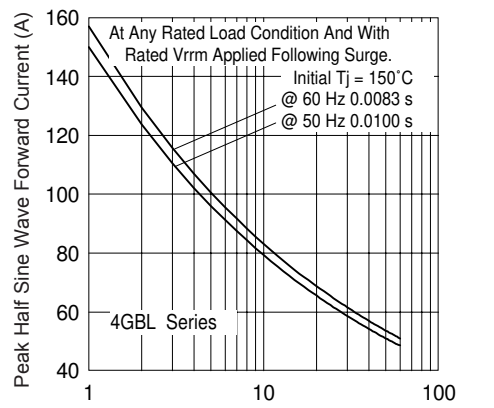


Fig. 4 - Maximum Non-Repetitive Surge Current

Data and specifications subject to change without notice.
This product has been designed and qualified for Multiple Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 06/03