



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





EVERLIGHT ELECTRONICS CO.,LTD.

# DATA SHEET

PART NO. : 519-1SURSYGW/S530-A3

DATE : 2003/5/25

DEPARTMENT : CHR&D1

REVISION : 1

<b>RECEIVED</b>			
<input checked="" type="checkbox"/> MASS PRODUCTION			
<input type="checkbox"/> PRELIMINARY			
<input type="checkbox"/> CUSTOMER DESIGN			
DEVICE NUMBER :		CDLE-051-136	
PAGE :		7	
CUSTOMER	DESIGNER	CHECKER	APPROVER

REV.	DESCRIPTION	RELEASE DATE

OFFICE: 7C BUILDING, LIAN HUA PORT INDUSTRIAL DISTRICT, LIAN HUA SHAN  
 BONDED PRICESSING ZONE PAN YU, GUANG ZHU, CHINA  
 TEL. : (020)84860913,84860914  
 FAX : (020)84860600  
[http : //www.everlight.com](http://www.everlight.com)



# Technical Data Sheet

## 2.0\*5.0mm Multi-Color Rectangle Type LED Lamps

519-1SURSYGW/S530-A3

### ■ Features :

- Two chips are matched for uniform light output, wide viewing angle
- Long life-solid state reliability
- I.C. compatible/Low power consumption



### ■ Descriptions :

- The 519-1 LED lamp contain two integral chips and is available as both bicolor and bipolar types.
- The Hyper Red and Super yellow Green light is emitted by diodes of AlGaInP and AlGaInP respectively.
- Type of bipolar lamps are both White Diffused and Color Diffused while the bicolor are White Diffused

### ■ Applications :

- TV set
- Monitor
- Telephone
- Computer


PART NO.	Chip		Lens Color
	Material	Emitted Color	
519-1SURSYGW/S530-A3	AlGaInP	Hyper Red	White Diffused
	AlGaInP	Super Yellow Green	



Technical Data Sheet  
 2.0\*5.0mm Multi-Color Rectangle Type LED Lamps

**519-1SURSYGW/S530-A3**

**Package Dimensions**

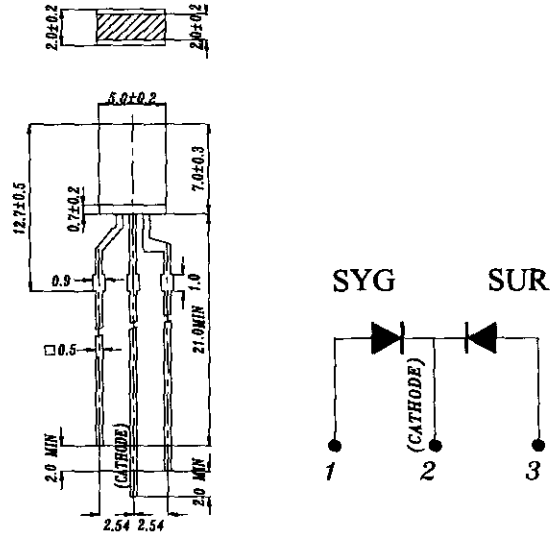

- Notes:**
1. All dimensions are in millimetres
  2. An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.
  3. Tolerances unless Dimension  $\pm 0.25\text{mm}$ .

**Absolute Maximum Ratings at Ta = 25°C**

Parameter	Symbol	Rating	Unit
Forward Current	IF	SURW/S530	25
		SYGW/S530	25
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	SURW/S530	60
		SYGW/S530	60
Peak Forward Current (Duty 1/10 @ 1KHz)	IF(Peak)	SURW/S530	160
		SYGW/S530	160
Reverse Voltage	VR	5	V



# Technical Data Sheet

## 2.0\*5.0mm Multi-Color Rectangle Type LED Lamps

### 519-1SURSYGW/S530-A3

#### Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition	
Luminous Intensity	Iv	SURW/S530	6.3	12.5	/	mcd	IF= 20 mA
		SYGW/S530	2.50	5.00	/		
Viewing Angle	2θ 1/2	/	180	/	deg	IF= 20 mA	
Peak Wavelength	λp	SURW/S530	/	632	/	nm	IF= 20 mA
		SYGW/S530	/	575	/		
Dominant Wavelength	λd	SURW/S530	/	624	/	nm	IF= 20 mA
		SYGW/S530	/	573	/		
Spectrum Radiation Bandwidth	Δλ	SURW/S530	/	20	/	nm	IF= 20 mA
		SYGW/S530	/	20	/		
Forward Voltage	VF	SURW/S530	/	2.0	2.4	V	IF= 20 mA
		SYGW/S530	/	2.0	2.4		
Reverse Current	IR	/	/	10	μA	VR= 5 V	









# Technical Data Sheet

## 2.0\*5.0mm Multi-Color Rectangle Type LED Lamps

### 519-1SURSYGW/S530-A3

#### Typical Electro-Optical Characteristic Curves:

(SUR)

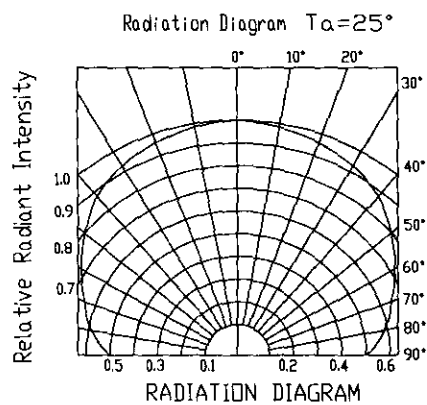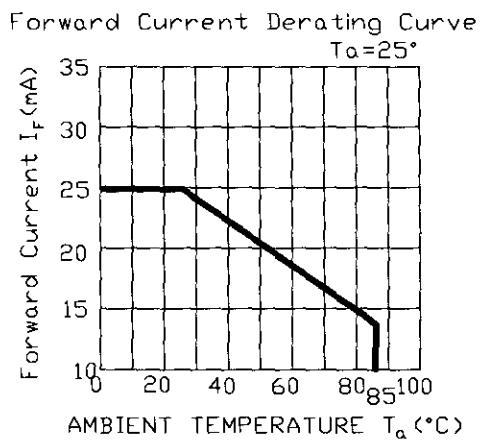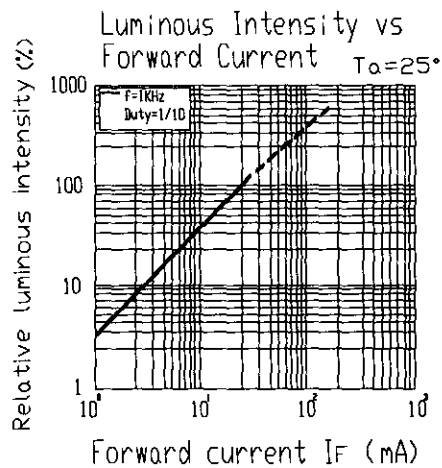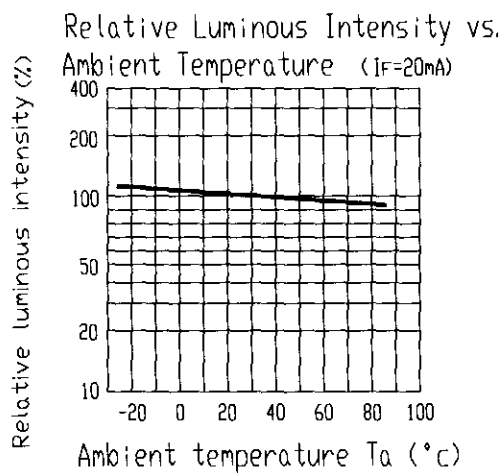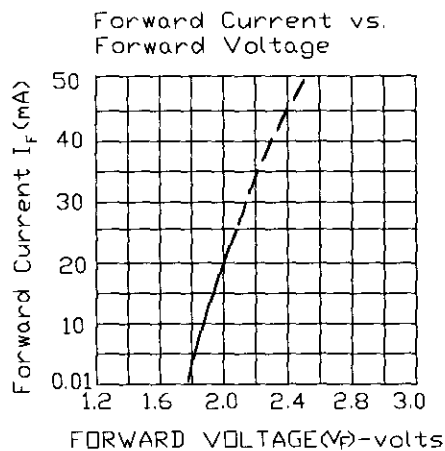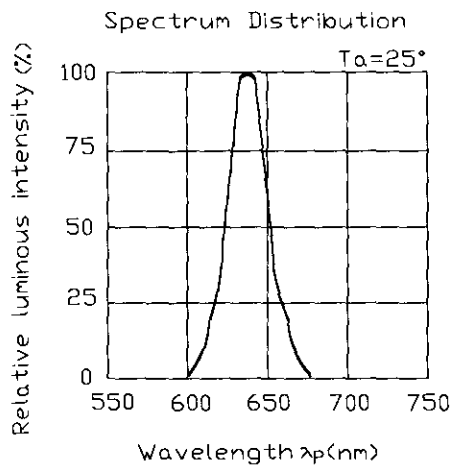









# Technical Data Sheet

## 2.0\*5.0mm Multi-Color Rectangle Type LED Lamps

### 519-1SURSYGW/S530-A3

#### Typical Electro-Optical Characteristic Curves:

(SYG)

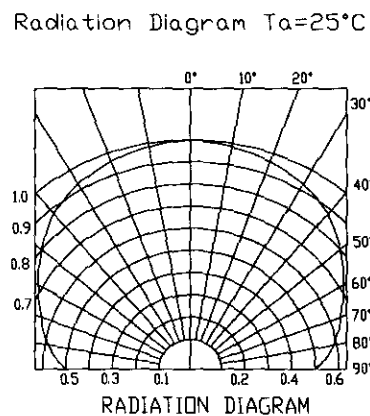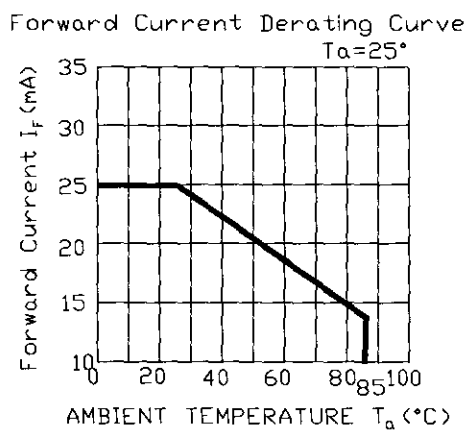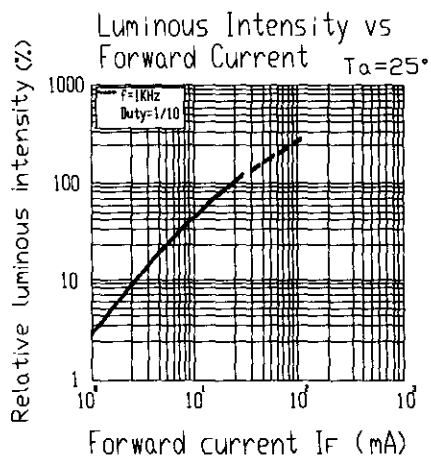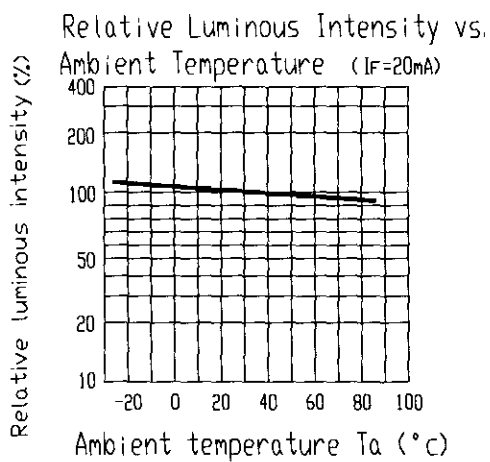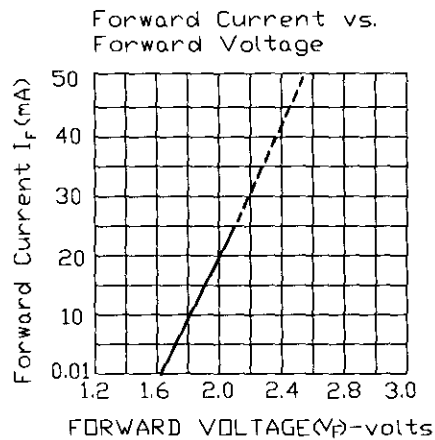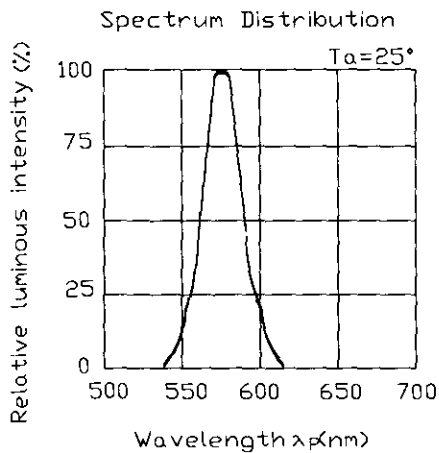





Technical Data Sheet  
2.0\*5.0mm Multi-Color Rectangle Type LED Lamps

**519-1SURSYGW/S530-A3**

■ Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	10 SEC	76 PCS	0/1
2	Temperature Cycle	H : +100°C 15min § 5 min L : -40°C 15min	300 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min § 10 sec L : -10°C 5min	300 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -40°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25°C If = 20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 HRS	76 PCS	0/1





## Technical Data Sheet

# 2.0\*5.0mm Multi-Color Rectangle Type LED Lamps

**519-1SURSYGW/S530-A3**

### Packing Quantity Specification

1.500PCS/1Bag , 6Bags/1Box

2.10Boxes/1Carton

### Label Form Specification

EVERLIGHT

CPN:

P/N:



519-1SURSYGW/S530-A3

QTY:



LOT NO: EL

CAT:

HUE:

REF:

MADE IN TAIWAN

CPN: Customer' s Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

### Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don' t reproduce or cause anyone to reproduce them without EVERLIGHT' s consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C.

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306  
<http://www.everlight.com>

EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-051-136

[http : //www.everlight.com](http://www.everlight.com)

Prepared date: 2003/5/25

Rev.: 1

Page: 7 of 7

Prepared by:Linchuansheng