



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



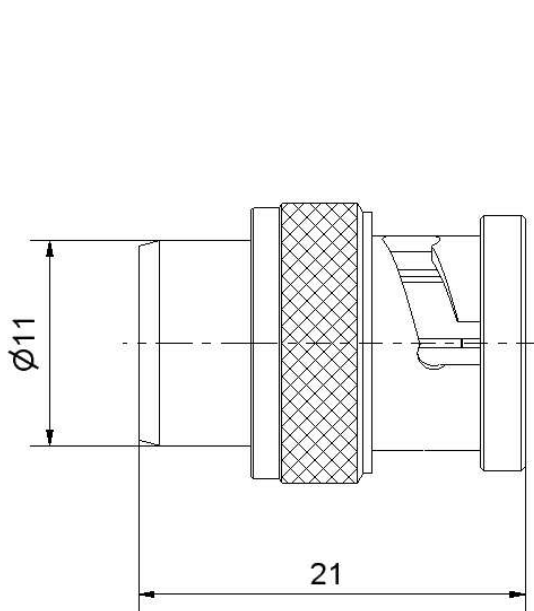

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 61169-8

Documents

N/A

Material and plating

Connector parts

Center contact
Outer contact
Body
Dielectric
Substrate
Gasket

Material

Brass
Brass
Brass
PTFE
Al₂O₃
NeoprenCR 50C6

Plating

Gold, min. 0.8 μm, over nickel
White bronze(e.g. Optalloy®)
White bronze(e.g. Optalloy®)

RF_35/09.14/6.2 Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

Technical Data Sheet				Rosenberger			
BNC 50 Ω		Termination Plug 1 Watt		51S1RR-001N4			
<div>Electrical data</div> <div>Impedance50 Ω</div> <div>FrequencyDC to 2 GHz</div> <div>Return loss≥ 20.8 dB, DC to 1 GHz</div> <div>≥ 15.6 dB, 1 GHz to 2 GHz</div> <div>Power handling (at 20 °C, sea level, VSWR 1.0)1 W at 25°C</div> <div>derated linearity to 0 Watts at 125°C</div>							
<div>Mechanical data</div> <div>Mating cycles≥ 500</div> <div>Center contact captivation)≥ 27 N</div>							
<div>Environmental data</div> <div>Temperature range-55°C to +155°C</div> <div>RoHScompliant</div>							
<div>Tooling</div> <div>N/A</div>							
<div>Suitable cables</div> <div>N/A</div>							
<div>Weight</div> <div>10.0 g/pce</div>							
<div>While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.</div>							
Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Kerstin Herzog	19.08.04	F. Reiner	20.06.18	c01	18-1026	M.Ruf	20.06.18
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 2 / 2