



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





DIALIGHT PART NUMBER	FORWARD VOLTAGE (V) TYP	FORWARD CURRENT (mA) TYP	LED EPOXY COLOR	LED CHIP	PEAK WAVELENGTH (nm)	LUMINOUS INTENSITY (mcd) TYP
559-0102-003F	5.0	10	RED DIFF.	GaAsP	635	8.0
559-0103-003F	12.0	13	RED DIFF.	GaAsP	635	8.0
559-0202-003F	5.0	12	GREEN DIFF.	GaP	565	8.0
559-0203-003F	12.0	13	GREEN DIFF.	GaP	565	8.0
559-0302-003F	5.0	10	YELLOW DIFF.	GaAsP/GaP	583	8.0
559-0303-003F	12.0	13	YELLOW DIFF.	GaAsP/GaP	583	8.0
559-1101-003F	1.8	2*	RED DIFF.	GaAsP/GaP	635	2.3
559-1201-003F	1.9	2*	YELLOW DIFF.	GaAsP/GaP	583	1.8
559-1301-003F	1.8	2*	GREEN DIFF.	GaP	565	1.8
559-2101-003F	2.2	10**	RED DIFF.	GaAsP/GaP	650	6.3
559-2201-003F	2.1	10**	GREEN DIFF.	GaP	563	10.0
559-2301-003F	2.0	10**	YELLOW DIFF.	GaAsP/GaP	585	10.0
559-2501-003F	1.9	10**	ORANGE DIFF.	GaAsP/GaP	600	7.0

REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A		NEW RELEASE	KLJ	RP	MES	7-7-08
B		ADDED WIRE INSULATION O.D., STRIPPED LENGTH DIMENSION AND INCLUDED "TYPE C MIL-W-168780" IN NOTE 2.	AJF	KLJ	NO	7-24-09

RoHS COMPLIANT 559-XX0X-003F

Part Numbers with the "F" suffix ending are RoHS Compliant. Packaging is marked with "RoHS Compliant" label or equivalent markings. Parts can be wave soldered, dip soldered or hand soldered using typical lead-free soldering process with max 260°C temp. for 5 sec.

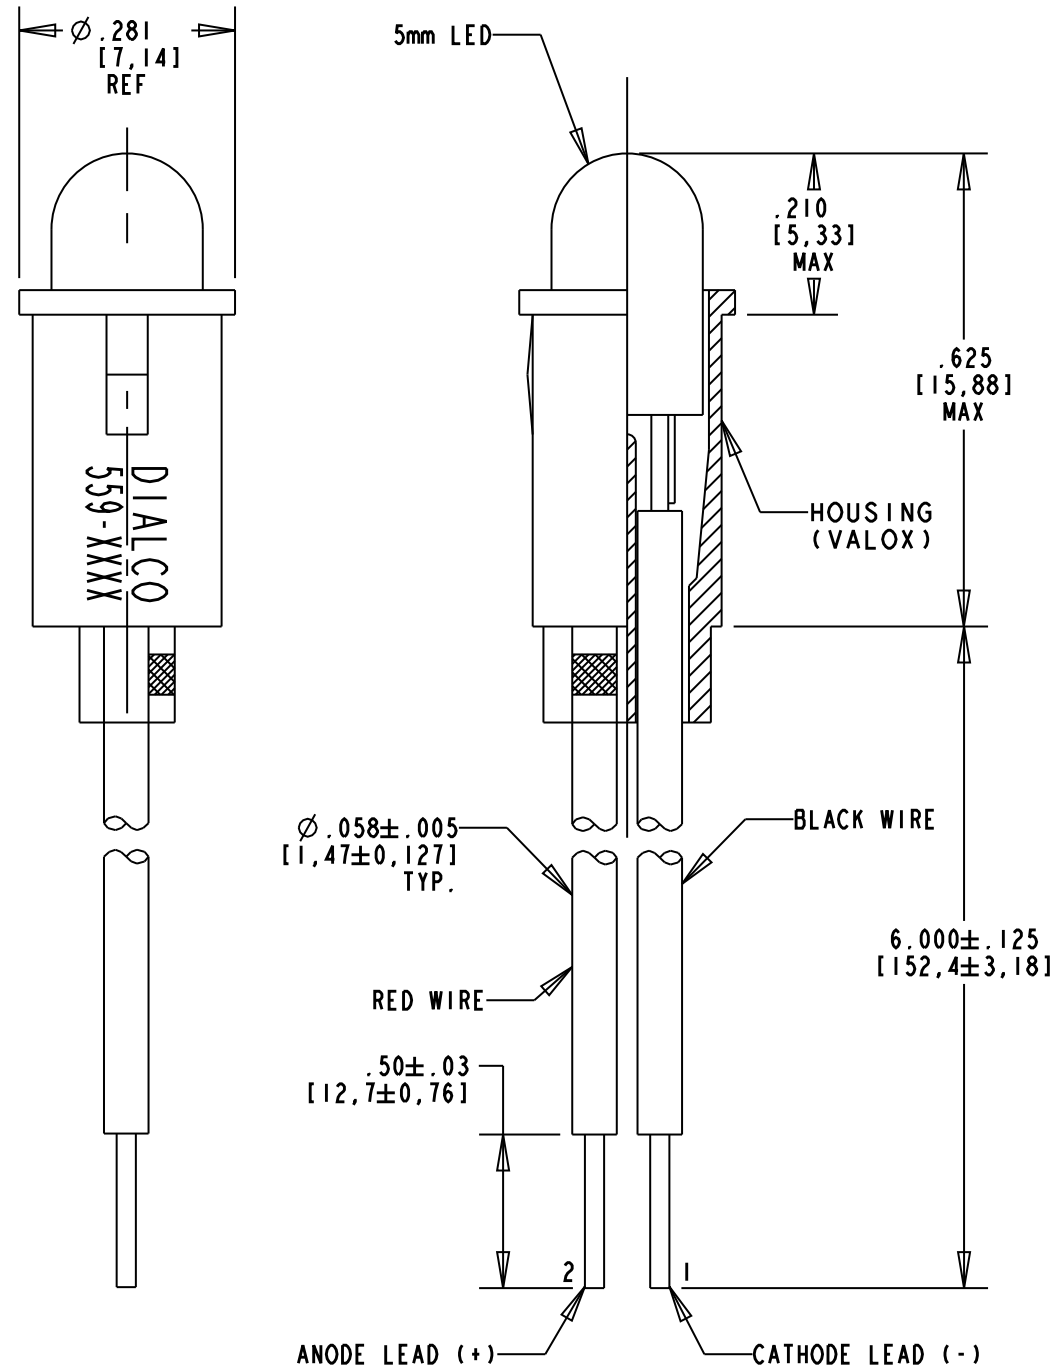

NOTES:

- * REQUIRES EXTERNAL RESISTOR.
** REQUIRES EXTERNAL RESISTOR, MAX FORWARD D.C. CURRENT 7mA.
- LEAD WIRES: #24 PVC 7/32 PRE-BONDED TYPE C MIL-W-168780.
- RECOMMENDED MOUNTING HOLE: $\varnothing .249-.252$ ON PANELS $.031-.062$ THICK.
- LED LEAD DIMENSIONS SHOWN ARE MEASURED AT HOUSING EXIT.
- PIN NUMBERS FOR REFERENCE ONLY, DESIGNATION NON-EXISTENT ON PART.
- DIALIGHT PART NUMBERS: 559-XX0X-003F.
- THIS ASSEMBLY CONTAINS ELECTROSTATIC DISCHARGE SENSITIVE DEVICES (ESDS). MAINTAIN ALL PRECAUTIONARY MEASURES DURING ASSEMBLY, HANDLING, AND STORAGE IN ACCORDANCE WITH IPC-A-610.



ATTENTION:
OBSERVE PRECAUTIONS FOR
HANDLING ELECTROSTATIC
SENSITIVE DEVICES

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE: 4:1 ALL DIM'S IN: INCHES (MM)	DRAWING NUMBER C-17617	REV B
TOLERANCES: UNLESS OTHERWISE SPECIFIED FRACTIONS: $\pm 1/64$ DECIMALS (.XX): $\pm .02$ DECIMALS (.XXX): $\pm .015$ DECIMALS (.XXXX): $\pm .0005$ ANGLES: $\pm 3^\circ$	TITLE LED PANEL MOUNT INDICATOR RoHS COMPLIANT	
FINISH:	MATERIAL	
FSCM 83330	Dialight 1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727	
	SHEET 1 OF 1	FAMILY TABLE: