



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SPECIFICATION CONTROL DRAWING

55A0113

TITLE WIRE, RADIATION-CROSSLINKED, MODIFIED, ETFE-INSULATED, NICKEL-COATED COPPER, LIGHTWEIGHT

Date 10-26-04

Revision Q

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

CONDUCTOR - NICKEL-COATED COPPER

INSULATOR - RADIATION-CROSSLINKED, MODIFIED ETFE

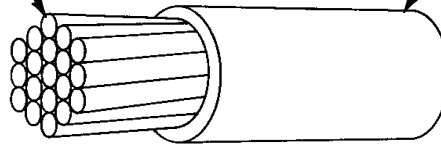


TABLE I. CONSTRUCTION DETAILS

PART NUMBER 1/	WIRE SIZE (AWG)	CONDUCTOR STRANDING (number x AWG)	DIAMETER OF STRANDED CONDUCTOR (in.)		FINISHED WIRE		
			MINIMUM	MAXIMUM	MAXIMUM RESISTANCE AT 20°C (ohms/1000 ft.)	DIAMETER (in.)	MAXIMUM WEIGHT (lbs/1000 ft.)
55A0113-30-*	30	7 x 38	.011	.013	110.7	.024 ± .002	.66
55A0113-28-*	28	7 x 36	.014	.016	67.9	.027 ± .002	.91
55A0113-26-*	26	19 x 38	.018	.020	42.2	.032 ± .002	1.4
55A0113-24-*	24	19 x 36	.023	.025	25.9	.037 ± .002	2.0
55A0113-22-*	22	19 x 34	.029	.031	16.0	.043 ± .002	2.8
55A0113-20-*	20	19 x 32	.037	.039	9.77	.050 ± .002	4.3
55A0113-18-*	18	19 x 30	.046	.049	6.10	.060 ± .002	6.5
55A0113-16-*	16	19 x 29	.052	.055	4.76	.068 ± .002	8.3
55A0113-14-*	14	19 x 27	.065	.069	3.00	.085 ± .003	13.0
55A0113-12-*	12	37 x 28	.084	.089	1.98	.103 ± .003	19.7
55A0113-10-*	10	37 x 26	.106	.113	1.24	.128 ± .006	32.2
55A0113- 8-*	8	133 x 29	.158	.173	.694	.188 ± .008	56.5

TABLE II. PERFORMANCE DETAILS

PART NUMBER 1/	BEND TESTING			
	MANDREL DIAMETER (inch) (± 3%)		WEIGHT (lb) (± 3%)	
	IMMERSION, LIFE CYCLE AND ACCELERATED AGING	COLD BEND	IMMERSION, LIFE CYCLE AND ACCELERATED AGING	COLD BEND
55A0113-30-*	.250	.375	.125	.500
55A0113-28-*	.250	.375	.125	.500
55A0113-26-*	.375	.500	.125	.500
55A0113-24-*	.375	.500	.250	1.00
55A0113-22-*	.500	.750	.375	1.00
55A0113-20-*	.500	.750	.500	1.00
55A0113-18-*	.500	1.00	.500	1.00
55A0113-16-*	.750	1.00	.750	1.00
55A0113-14-*	1.00	1.50	1.00	3.00
55A0113-12-*	1.50	2.00	1.50	3.00
55A0113-10-*	2.00	3.00	1.50	3.00
55A0113- 8-*	3.00	4.00	4.00	6.00

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



Raychem Wire & Cable  
501 Oakside Avenue  
Redwood City, CA 94063-3800  
Phone: 1-800-227-8816  
Fax: 1-650-361-6297

**WIRE RATINGS AND ADDITIONAL REQUIREMENTS**

TEMPERATURE RATING: 200°C,

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

ACCELERATED AGING (CROSSLINKING PROOF): 300 ± 3°C for 7 hours

BLOCKING: 230 ± 3°C for 24 hours

COLOR: white preferred

CONCENTRICITY: 70% (minimum)

FLAMMABILITY: Procedure 1, 3 seconds (maximum); 3 in. (maximum); no flaming of facial tissue

HUMIDITY RESISTANCE: Insulation Resistance,

5000 megohms for 1000 ft. (minimum) for AWG 30 - 10

3000 megohms for 1000 ft. (minimum) for AWG 8

IDENTIFICATION, COLOR STRIPING AND BAND DURABILITY:

125 cycles (250 strokes) (minimum), 500 g weight

IMMERSION: Diameter increase 5% (maximum); no cracking, no dielectric breakdown

INSULATION ELONGATION AND TENSILE STRENGTH:

Elongation, 75% (minimum)

Tensile strength, 5000 lbf/in<sup>2</sup> (minimum)

INSULATION FLAWS:

Spark test, 5.7 kV (rms) at 3 kHz

Impulse Dielectric Test, 8.0 kV (peak)

INSULATION RESISTANCE:

5000 megohms for 1000 ft. (minimum) for AWG 30 - 10

3000 megohms for 1000 ft. (minimum) for AWG 8

INSULATION THICKNESS: 0.005 in. (minimum)

LIFE CYCLE: 230 ± 3°C for 500 hours

LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours

SHRINKAGE: 230 ± 3°C, for 6 hours, 0.125 in. (maximum) in 12 in.

SMOKE TEST: 250 ± 5°C. No visible smoke

SURFACE RESISTANCE: 500 megohms-in. (minimum), both readings

THERMAL SHOCK RESISTANCE: 200 ± 3°C, 0.060 in. (maximum)

VOLTAGE WITHSTAND TEST (Post Environmental): 2500 volts (rms), 60 Hz

WRAP TEST: 313 ± 3°C for 2 hours

PART NUMBER:

The "\*" in the part numbers on page 1 shall be replaced by a color code designator.

1/ Example: AWG 22, white: 55A0113-22-9

AWG 22, white with black stripe: 55A0113-22-90

1/ See footer section on page 1