



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING


55A7028

TITLE THREE CONDUCTOR CABLE, SHIELDED, JACKETED

Date 12-21-90

Revision

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

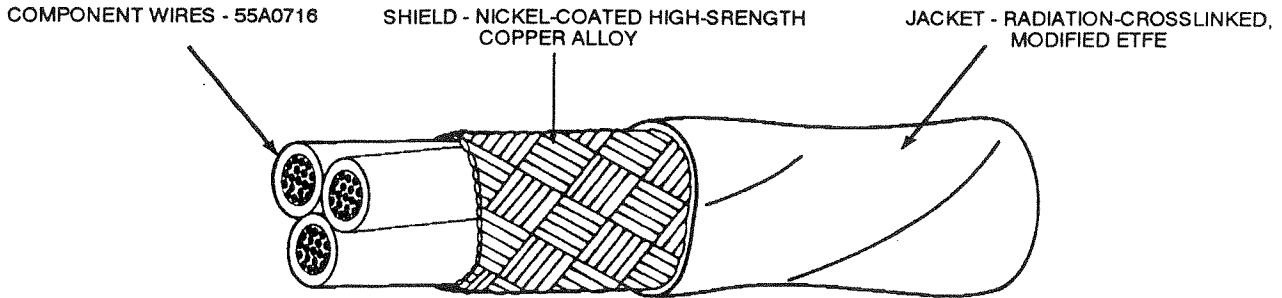

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A7028-26-*	26	38	.006	.008	.143	.150	16.2
55A7028-24-*	24	38	.006	.008	.154	.162	19.0
55A7028-22-*	22	38	.006	.008	.167	.175	23.0
55A7028-20-*	20	38	.006	.008	.184	.193	29.4
55A7028-18-*	18	38	.006	.008	.206	.216	39.1
55A7028-16-*	16	38	.007	.009	.223	.234	46.6

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 ACCELERATED AGING: 300 ± 3°C for 7 hours
 BLOCKING: 200 ± 3°C for 6 hours
 DIELECTRIC WITHSTAND: 1500 volts, 60 Hz
 FLAMMABILITY:
 Procedure 1, 3 seconds (maximum); 3 in. (maximum);
 no flaming of facial tissue
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts, 60 Hz (rms), 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 230 ± 3°C for 500 hours
 LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours
 SHIELD COVERAGE: 85% (minimum)
 THERMAL SHOCK: 300 ± 3°C for 6 hours
 VOLTAGE WITHSTAND TEST: (After Accelerated Aging,
 Immersion, Life Cycle and Low-Temperature-Cold Bend)
 1000 volts, 60 Hz, 1 minute

PART NUMBER:
 The *** in the part numbers above shall be replaced by
 color code designators with a slash separating the
 component wire colors and a dash separating the
 component wire colors from the jacket color.
 Example: AWG 20, white, black and red components
 wires; white jacket:
 55A7028-20-9/0/2-9

Note: Nominal values are for information only.
 Nominal values are not requirements

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 (415) 361 3333 TWX 910 373 1728