



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

55PC1231

TITLE

THREE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT


Date

1-15-93

Revision

B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

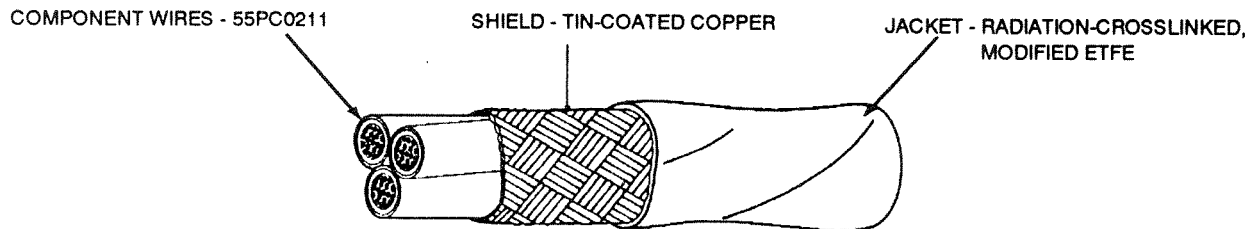

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1231-26.*	26	38	.0055	.0070	.102	.107	.112	9.89	10.39
55PC1231-24.*	24	38	.0060	.0075	.113	.118	.123	12.42	12.93
55PC1231-22.*	22	38	.0060	.0075	.126	.131	.136	16.05	16.62
55PC1231-20.*	20	38	.0060	.0075	.144	.149	.154	21.74	22.41
55PC1231-18.*	18	38	.0060	.0080	.166	.171	.176	29.93	30.81
55PC1231-16.*	16	38	.0060	.0080	.182	.187	.192	36.40	37.38
55PC1231-14.*	14	38	.0060	.0080	.214	.219	.224	52.21	53.41
55PC1231-12.*	12	38	.0060	.0080	.254	.260	.266	75.71	77.19
55PC1231-10.*	10	36	.0070	.0090	.311	.320	.329	118.63	121.46

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 22, red, blue and yellow component wires; white jacket: 55PC1231-22-2/6/4-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.