



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Asset Tracking Internal Antenna

Cell+GPS|Wedge

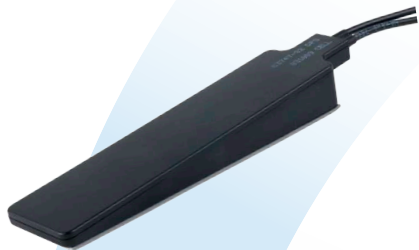

LOW-PROFILE ANTENNA IS IDEAL FOR COVERT INSTALLATIONS

The Wedge antenna helps enable fleet tracking while providing five radio frequency options. The antenna's small size offers covert installation for fleet, logistics, utility, and public safety applications. The versatile multiband solution supports AMPS, GSM, DCS, PCS, and UMTS frequency voice and data; and operates in the 3 to 5 volt range. An optional housing is available which is suitable for glass mounting.

Laird Technologies is a leading supplier of mobile antenna solutions for automotive, asset tracking and consumer electronics industries. Products include cellular antennas (AMPS, GSM/DCS/PCS, UMTS), GPS antennas, entertainment antennas (AM/FM, DAB, DVB-T, Satellite radio, TV), mobile communication antennas (Bluetooth, DSRC, RKE, TPMS, WiFi), satellite communication antennas and battery packs.

Leveraging our experience in M2M wireless modules, Laird Technologies also designs smart antennas integrating functionalities such as cellular, WiFi and Bluetooth® modems, GPS receivers and vehicle networking. All of these capabilities can be further integrated into M2M Devices, that add control electronics and firmware to provide the latest evolution in telematics systems.

FEATURES

- Compact and ideally suited for stealth applications
- Measures only 138 x 32 x 11.2mm
- Hook and Loop fastener or adhesive mounts available
- Operates in the 3 to 5 volt range
- Two housing options available

BENEFITS

- Low total-cost implementation
- Easy installation
- Easy concealment
- Small package size
- Meets enhanced environmental specifications

APPLICATIONS

- General automotive aftermarket
- Fleet logistics, tracking, and diagnostics
- Theft protection
- Vehicle and asset recovery
- Navigation systems
- Infotainment systems
- On-board computing

global solutions: local support.™

Americas: +810.695.9810
Europe: +44.1628.858.940
Asia: +852.2268.6567

Asset Tracking Internal Antenna

Cell+GPS|Wedge

Wedge

	AMPS	GSM	DCS	PCS	UMTS	GPS
ANTENNA SPECIFICATION						
Frequency Range	824-896 MHz	880-960 MHz	1710-1880 MHz	1850-1990 MHz	1920-2170 MHz	1574.42 - 1576.42 MHz
Peak Gain	3.5 dBi	3.0 dBi	3.5 dBi	0 dBi	2.5 dBi	3.0 dBi @ Boresight
Polarization	Linear	Linear	Linear	Linear	Linear	RHCP
Impedance	50 Ω	50 Ω	50 Ω	50 Ω	50 Ω	50 Ω
Output VSWR (Min. Perf.)	≤ 2:1	≤ 2:1	≤ 2:1	≤ 2:1	≤ 2:1	≤ 2:1

LNA SPECIFICATION						
Gain (Max)						28 dB
Noise Figure						≤1.5 dB
Supply Voltage						3.3 ± 0.3V or 5.0 ± 0.5V
Current						17 mA
Input P1dB						≥-27dBm
Output VSWR						≤ 2:1

MECHANICAL SPECIFICATION						
Dimension	138 X 32 X 11.2 mm					
Radome Material	Cyclopy					
Connectors	SMC for cellular, SMA for GPS					
Cable Length	4000 mm					
Cable Type	RG-174 Coaxial					
Mounting Method	Hook and Loop, Adhesive					

ENVIRONMENTAL SPECIFICATION						
Operating Temperature	-40°C to +85°C					
Humidity	Operation 95% RH at 65°C					
Ingress Protection	IP-50					
Drop Test / Shock	50 g shocks 10x3 axis / 1 meter drop 6 axis					
Vibration	10-1000 Hz vibration 1 hour 3 axis					

ORDERING INFORMATION						
Part Number	637112					
Customization available w/MOQ	Cable type, length, connector type, mounting style					



Optional housing available.

TEL-DS-INTERNAL WEDGE 1210

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.