



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



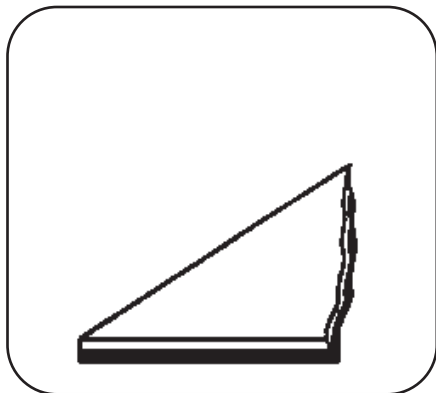

GREEN

Disclaimer:


All statements, technical data, and recommendations contained herein are based upon tests we believe to be reliable. However, the accuracy or completeness thereof is not guaranteed. The proper and correct applications of products and data is the responsibility of the user. Statements or recommendations not contained herein shall have no force or effect unless embodied in a written agreement signed by authorized offers of Desco Industries, Inc.

Limited Lifetime Warranty:

Desco warrants for one year that Statfree® matting products will be free of defects in materials and workmanship and will guarantee dissipative/conductive mat properties for the life of the mat. Damage to matting caused by misuse of any kind, including using inappropriate cleaners is not covered by Desco Limited Warranty.

Tolerances:

Width +/- .250"
Length +/- .250" every 1
linear foot of running material.



Made in America

Description:

Statfree T2™ meets the worksurface requirements of ANSI/ESD S20.20 and recommendation of ESD S4.1. This material is a dual purpose rubber matting material. The two layer construction allows it to be used as a dissipative or a conductive matting product. The soft dissipative layer makes an excellent table mat, ideal for use in soldering and assembly areas. This rubber material has superior resistance to heat, abrasion, chemicals, and is easy to clean and maintain. Statfree T2™ material will not melt and does not burn when coming into contact with hot metal parts or soldering debris. It is amine, chloride, sulfide, alumina, and magnesia free. Statfree T2™ is suitable for use with continuous monitors. **The green material identifies the worksurface as a Lead-Free work zone. See illustration on the reverse side.**



Statfree T2™ is manufactured without any ozone depleting substances, and is in accordance with the Montreal Protocol.

Electrical Properties:

Property	Test Method	Value
RTT Resistance:	ESD S4.1	10 ⁶ - 10 ⁸ Ohms
RTG Resistance:	ESD S4.1	10 ⁷ - 10 ⁸ Ohms
Charge Decay:	FTMS 101C, Method 4046	0.01 seconds

Electrical Properties obtained by testing to industrial standards by an independent testing laboratory @ 100 Volts and 50% relative humidity unless otherwise specified. Complete text of the test report is available upon request.

RoHS Compliance Statement

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1. See Desco Industries Inc. letter on-line at Desco.com.

Specifications:

Construction:	Dual-layer rubber material, lead-free
Thickness:	0.060" (1.5mm)
Color:*	Green (top), Black (bottom)
Texture:*	Slight embossed
Weight:	0.43 lbs./sq. ft. (0.2g/cm ²)
Hardness:	65 ± 5 Shore "A", per ASTM-D2240
Heat Resistance:	Does not melt or burn when coming into contact with hot solder and soldering irons.
Chemical Resistance:	Resistance to degradation by inorganic acids, organic acids, reducing agents, aliphatic hydrocarbons, mineral oil, aldehydes, and amines

*Color and texture may vary between lots and mills

Grounding: This material must be properly grounded for optimum electrical performance. Ask for Technical Bulletin TB-2000 for mat grounding instructions.

Cleaning: Use only ESD mat cleaner such as Reztore™ Surface & Mat Cleaner to clean and extend mat useful life. Do not use cleaners containing silicone as silicone will create an insulative film on the surface. Do not use solvent based cleaners as solvents will dry out matting and may cause curling.

See reverse side for available mat and roll sizes.

STATFREE T2™ MATERIAL, LEAD-FREE, DISSIPATIVE, RUBBER, 2-LAYER, 0.060" (1.5mm)

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: www.desco.com
PHONE (909) 627-8178 FAX (909) 627-7449

DESCO EAST: 90 HUDSON RD, CANTON, MA 02021-1407
PHONE (781) 821-8370 FAX (781) 575-0172

MATERIAL STATFREE T2™

DRAWING PM-122

DATE:
2/06

DESCO

Item Number Reference For StatfreeT2™ Lead-Free Rubber, Dissipative, 2-Layer

KITS



Mat Top Kit Item Numbers

SIZE	GREEN
24" x 36"	66057
24" x 48"	66058

MAT TOP KIT INCLUDES

- 1 Benchmat, Statfree T2™, size as specified
- 1 14213, Common point kit w/snap, customer installed

Lead Free Workstation

Statfree T2™ Lead-Free Rubber is laser engraved with "Lead-Free Workstation" to designate the area as free of lead.



Look for the Statfree® brand on Desco ESD matting. All Desco mat top kits are permanently marked for your protection and auditing purposes.

ROLL STOCK

Statfree T2™
Is Also Available In Full Rolls




Hardware is not included with rolls.

Grounding Intervals for ESD Mats

Sufficient ground cords should be used to reliably meet ANSI/ESD S20.20 Table 1 less than 1×10^9 ohms for worksurfaces. An industry recommendation has been that continuous runs of ESD matting should be grounded at ten-foot intervals to allow proper charge decay rates with each individual ESD mat should be grounded with ground snap located no further than five feet from either end.

0.060" (1.5mm)
THICK ROLLS

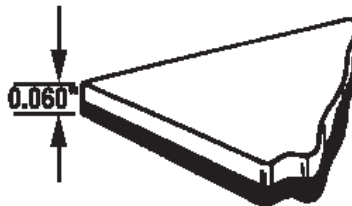

Roll Stock Item Numbers

SIZE	GREEN
24" x 24'	66120
30" x 24'	66121
36" x 24'	66122
48" x 24'	66123

Matting materials have a tendency to shrink slightly when first unrolled. In applications where length is critical, allow the material to relax for at least 4 hours before cutting to size. Always trim with a sharp knife or razor blade.