



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Miniature Fuse, 6.3 x 32 mm, Super-Quick-Acting FF, 250 VAC



UL 248-14 · 250 VAC · Super-Quick-Acting FF

See below:  
[Approvals and Compliances](#)

### Description

- High breaking capacity
- Current ratings above 12.5 A not China-RoHS compliant

### Applications

- Semiconductor protection
- Test equipment

### Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

### Technical Data

Rated Voltage	250 VAC
Rated current	0.1 - 20 A
Breaking Capacity	200 kA
Characteristic	Super-Quick-Acting FF
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/56 acc. to IEC 60068-1
Material: Tube	Ceramic
Unit Weight	3 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Rated current, Rated Voltage, Approvals

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

### Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.  
Approval Reference Type: A12FA

Approval Logo	Certificates	Certification Body	Description
	<a href="#">UL Approvals</a>	UL	UL File Number: E132506

### Product standards

Product standards that are referenced

Organization	Design	Standard	Description
	Designed according to	UL 248-14	Low voltage fuses - Part 14: Additional fuses





### Application standards

Application standards where the product can be used


Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment.

## Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	<a href="#">CE declaration of conformity</a>	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	<a href="#">RoHS</a>	SCHURTER AG	EU Directive RoHS 2011/65/EU
	<a href="#">China RoHS</a>	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	<a href="#">REACH</a>	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

## Dimension [mm]

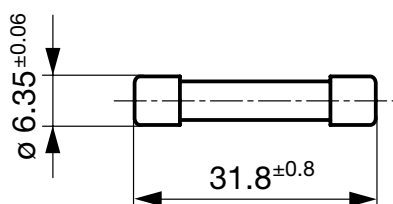


## Pre-Arcing Time


Rated Current  $I_n$     1.1 x  $I_n$  min.    2.1 x  $I_n$  max.

0.1 A - 20 A	60 min	60 min
--------------	--------	--------

## Time-Current-Curves

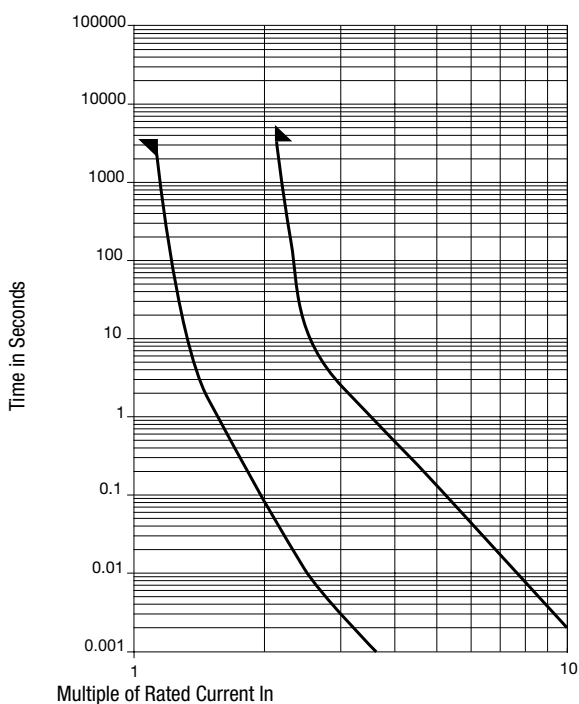

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I <sub>n</sub> typ. [mV]	Power Dissipation 1.5 I <sub>n</sub> typ. [mW]	Melting I <sup>2</sup> t 10.0 Intyp. [A <sup>2</sup> s]	 Order Number
0.1	250	1)	2600	1500	0.0017	● 7022.0250
0.125	250	1)	2300	1500	0.0033	● 7022.0260
0.315	250	1)	2150	4100	0.027	● 7022.0300
0.4	250	1)	2750	2850	0.025	● 7022.0310
0.5	250	1)	2850	3650	0.045	● 7022.0320
0.63	250	1)	2000	3200	0.11	● 7022.0330
0.8	250	1)	2050	4150	0.18	● 7022.0340
1	250	1)	1750	4450	0.41	● 7022.0350
1.25	250	1)	740	4150	0.22	● 7022.0360
1.6	250	1)	570	3050	0.5	● 7022.0370
2	250	1)	615	4500	0.89	● 7022.0380
2.5	250	1)	465	4350	1.8	● 7022.0390
3.15	250	1)	440	5000	3.4	● 7022.0400
4	250	1)	335	4800	8.4	● 7022.0410
5	250	1)	395	7700	12	● 7022.0420
6.3	250	1)	170	3000	34	● 7022.0430
8	250	1)	135	3000	12	● 7022.0440
10	250	1)	155	4750	30	● 7022.0450
12.5	250	1)	180	-	26	● 7022.0460
16	250	1)	270	-	39	● 7022.0470
20	250	1)	270	-	39	● 7022.0480

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 200 kA @ 250 VAC, p.f. ≥ 0.2

**Packaging Unit**      Small Box Pack (10 pcs.)