



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Varnished Chokes



The Model 73F Series is currently available but not recommended for new designs.


Special Features

- High Q, high self-resonant frequency
- High voltage application
- Universal wound
- Ferrite core
- Low cost
- Varnish coated
- Operating temperature -55 to +105 °C

Notes

* Current to cause 35 °C max. temperature rise

† RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

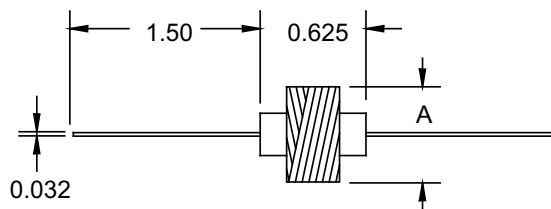

Dimensions: Inches

73F Series							
Part Number	L (μH) ±5 %	Q Min.	Test Freq. (MHz)	SRF (MHz) Min.	DCR Ω Max.	I, DC* (mA)	Dim. A Max
73F104AF-RC	100	140	0.79	7.7	2.0	250	0.33
73F124AF-RC	120	140	0.79	7.0	2.2	250	0.33
73F154AF-RC	150	160	0.79	6.3	2.5	250	0.33
73F184AF-RC	180	160	0.79	6.0	2.9	250	0.34
73F224AF-RC	220	160	0.79	5.6	3.2	250	0.36
73F274AF-RC	270	160	0.79	5.1	3.6	250	0.36
73F334AF-RC	330	160	0.79	4.8	3.8	250	0.37
73F394AF-RC	390	160	0.79	4.4	4.2	225	0.39
73F474AF-RC	470	160	0.79	3.9	4.8	200	0.39
73F564AF-RC	560	160	0.79	3.6	5.3	200	0.40
73F684AF-RC	680	160	0.79	3.4	6.0	200	0.40
73F824AF-RC	820	150	0.79	3.1	6.8	200	0.44
73F103AF-RC	1000	140	0.79	2.6	7.5	150	0.47
73F123AF-RC	1200	140	0.25	2.2	7.8	150	0.54
73F153AF-RC	1500	140	0.25	2.0	8.8	150	0.58
73F183AF-RC	1800	140	0.25	1.8	11.0	150	0.61
73F223AF-RC	2200	100	0.25	1.5	12.0	150	0.44
73F273AF-RC	2700	100	0.25	1.4	13.5	125	0.47
73F333AF-RC	3300	100	0.25	1.3	15.1	125	0.50
73F393AF-RC	3900	95	0.25	1.2	18.0	125	0.51
73F473AF-RC	4700	95	0.25	1.0	21.5	100	0.53
73F563AF-RC	5600	95	0.25	1.0	25.0	80	0.56
73F683AF-RC	6800	95	0.25	0.90	29.0	80	0.59
73F823AF-RC	8200	70	0.25	0.91	30.0	80	0.54
73F102AF-RC	10,000	65	0.25	0.85	34.0	80	0.58

"-RC" suffix indicates RoHS compliance.