



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






UNIT:mm


2000±50

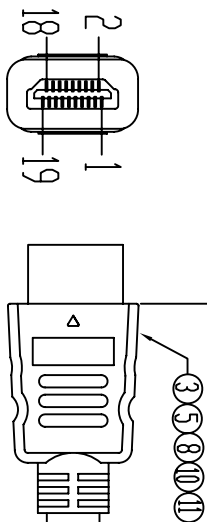

P1



P2



Electronic Test:

- 1.100% Test,(Open,Short,Miss Wire)
- 2.Contact Resistance:2 ohm max.
- 3.Insulation Resistance:10M ohm min.
- 4.Hi-Pot:300V DC/10ms
- 5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

CnC Tech, LLC
Industrial Cable and Connector Technology

DRAWN BY ZHONGHS DRAWING NO. VG/LJQ-094-006

CHECKED BY CUSTOMER CNC

APPROVAL BY ITEM NO. 741-20010-00200

DECIDE BY DATE 2012-02-14

VERSIONS/EDITION A/0 PROJECTION



①	TUBE	8	HEAT SHRINK TUBE BLACK OD3.0mm L=7mm.
		2	HEAT SHRINK TUBE BLACK OD2.0mm L=15mm.
⑧	COPPER FOIL	8	HEAT SHRINK TUBE BLACK OD1.5mm L=25mm.
⑩	COPPER FOIL	1	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W13mm*L30mm
⑨	COPPER FOIL	1	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
⑧	IN JACKET	4g	CLEAR PE(NM-18)
⑦	IN JACKET	4g	CLEAR PE(NM-15)
⑥	OUT JACKET	15g	BLACK PVC 40P(WM-17)
⑤	OUT JACKET	8g	BLACK PVC 40P (WM-39)
④	SCREW	2	SCREW #4*40UNS Ø2.8*L32mm NICKEL MOLD BLACK ABS
③	CONN	1	HDMI 19P MALE PIN G/F, SHELL NICKEL
②	CONN	1	DV(18+1) MALE INSULATION BLACK.SHELL NICKEL,PIN GOLD FLASH.
①	CABLE	1	UL20276 [(30AWG*1P+DW+AL/MY)*4]+28AWG*7C+AL/MY+D.W+BD+JACKET:BLACK OD:5.7±0.15mm L=2000+30/-0mm.
NO.	NAME	Q'TY	SPECIFICATION

4

3

2

1