## imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**MULTIPORT** SERIAL CARDS

# **DIGINEO**<sup>®</sup>

DIGI

Flexible serial cards deliver reliable, cost-effective and high performance serial port expansion in one of the smallest form factors available

Digi Neo multiport serial cards are designed for reliable serial port expansion in tight workspaces and specialized server/PC environments. They are ideal for point-of-sale, industrial automation, factory control, kiosks and data collection applications.

Leveraging an Application Specific Integrated Circuit (ASIC), Digi Neo delivers up to 921.6 Kbps of throughput. This PCIe compatible card offers on-board surge suppression on each signal, protecting system operation from electrical interference. Additional features include large buffers for data transfer, low latency and baud rate customization.

These low-cost serial cards have one of the smallest form factors available and are one of the only low profile eightport cards on the market. An extensive range of cabling and software driver options makes Digi Neo a flexible and easy-to-install solution. Enhanced software monitoring and diagnostic tools ensure proper installation and serial port performance.

#### **BENEFITS**

- 4 or 8 RS-232 serial ports
- Low Profile and Standard Profile supported
- PCI Express slot support \_
- Flexible cabling and connector options
- Surge suppression on all signals protects against electrical interference with system operation
- Low latency for reliable performance
- Windows<sup>®</sup> and Linux<sup>®</sup> driver support
- Throughput up to 921.6 Kbps

### **RELATED PRODUCTS**








TS MEL





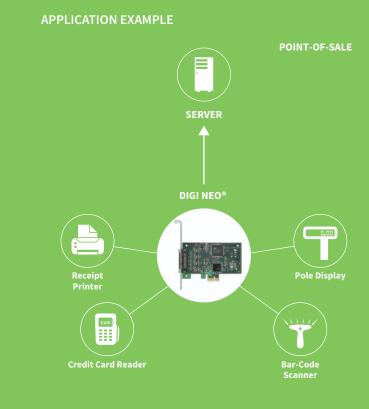

**EdgePort**®

SPECIFICATIONS	Digi Neo® 4- or 8-Port	
BUS INTERFACE		
PLATFORM	PCI Express (PCIe)	
PCI SLOT	PCI Express x1, x2, x4, x8, x12, x16 lane compatible	
LOW PROFILE PCI	Yes - Low profile bracket included	
SERIAL PORTS	4 or 8 RS-232	
SERIAL CONNECTOR	DB-25, 4' DB-9 fan-out cables; DB-9, RJ-45 connector boxes with 6' captive cable	
THROUGHPUT	Up to 921.6 Kbps	
FEATURES		
OPERATING SYSTEMS	Windows 10 <sup>®</sup> , Windows <sup>®</sup> 8, Windows <sup>®</sup> 7, Windows Server 2016, Windows Server <sup>®</sup> 2012, Windows Vista <sup>®</sup> , Windows Server <sup>®</sup> 2003, Windows Server <sup>®</sup> 2008, Windows <sup>®</sup> XP, Linux <sup>®</sup>	
DIMENSIONS (L X W X H)	4.72 in x 0.72 in x 2.45 in (11.99 cm x 1.84 cm x 6.22 cm)	
WEIGHT	2.00 oz (57.00 g)	
OTHER	Full modem control, Hardware or software flow control, Low latency, Custom baud rates	
POWER REQUIREMENTS		
TYPICAL (+5V)	20 mA	
MAXIMUM (+5V)	100 mA	
TYPICAL (+12V)	100 mA	
MAXIMUM (+12V)	150 mA	
SURGE PROTECTION	15 kV surge protection on all signals	
ENVIRONMENTAL		
OPERATING TEMPERATURE	0° C to 55° C (32° F to 131° F)	
STORAGE TEMPERATURE	-25° C to +85° C (-13° F to +185° F)	
RELATIVE HUMIDITY	5% to 90% (non-condensing)	
ALTITUDE	0 to 12,000 feet (0 to 3,660 meters)	
REGULATORY APPROVALS		
SAFETY	UL 1950, CSA 22.2 No. 950, EN60950, AS3260	
EMISSIONS/IMMUNITY	FCC Part 15 (Class B), EN55022 (Class B), EN55024, ICES 003 (Class B), AS3548, VCCI (Class B)	

PART NUMBERS	DESCRIPTION
77000889	Digi Neo PCI Express 8-port w/o cable (low profile bracket included)
77000890	Digi Neo PCI Express 4-port w/o cable (low profile bracket included)
CABLES	
76000523	8-port DTE DB-25M fan-out cable
76000527	8-port DTE RJ-45 connector box
76000529	8-port DTE DB-9M fan-out cable
76000534	HD-68M to DB-78F legacy cable converter
76000561	8-port DTE DB-9M connector box
76000522	4-port DTE DB-25M fan-out cable
76000526	4-port DTE RJ-45 connector box
76000528	4-port DB-9M straight fan-out cable
76000560	4-port DTE DB-9M connector box

91001079

J2/417

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

 $\odot$  1996-2017 Digi International Inc. All rights reserved. All trademarks are the property of their respective owners.

DIGI INTERNATIONAL WORLDWIDE HQ 877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE +33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN +81-3-5428-0261 / www.digi-intl.co.jp DIGI INTERNATIONAL SINGAPORE +65-6213-5380

Here the second second

