



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



插頭部件 (Plug Component)			頭部剥皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部剥皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內制(Strip)	外制(Roj)	顏色(Color)		外制(Roj)	內制(Strip)	顏色(Color)	顏色(Color)	零件描述(Component)	數量(Q'ty)
35P黑色 90A+2A Black	FM-7 (IEC 320 C14) 電腦電源線端子 鍍鎳 (Computer Power Cord Terminals)	1	5 <sup>+1</sup> <sub>-0</sub>	13±1	黑/Black(L)	SVT 18AWG/3C  105°C 黑色(Black)  線長: (Length) 1828.8 <sup>+50.8</sup> <sub>-12.7</sub>	22±1	5 <sup>+1</sup> <sub>-0</sub>	黑/Black(L)	35P黑色 90A+2A Black	FM-305 (IEC 320 C5) 電腦電源線端子 (Computer power cord terminals)	1
鍍鎳 (Nickel-Plated)	FM-7零件式內模 (FM-7 Inner Body)	3	5 <sup>+1</sup> <sub>-0</sub>	13±1	白/White(N)		22±1	5 <sup>+1</sup> <sub>-0</sub>	白/White(N)	銅本色 (Copper)	FM-302零件式內模 (FM-302 Inner Body)	3
黑色(Black)		1	5 <sup>+1</sup> <sub>-0</sub>	15±1	綠/Green(E)		22±1	5 <sup>+1</sup> <sub>-0</sub>	綠/Green(E)	白色(White)		1

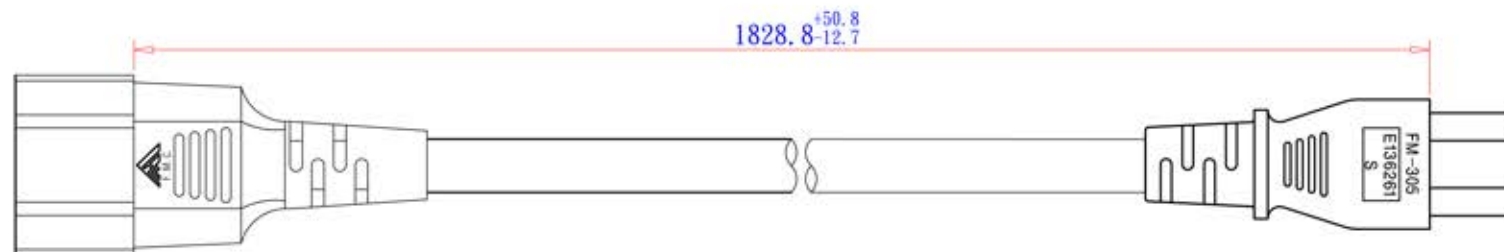


插頭端面圖  
(Dimensions of Plug Face)


Insulation Thickness 0.38 mm  
Overall Diameter 2.0±0.10 mm

Copper Conductor  
41/0.160±0.004 mm  
Resistance 22.4  
(20°C (Max). ohms/km)

Jacket Thickness 0.76 mm  
Overall Diameter 6.3±0.15 mm



線材截面圖  
(Wire Cross-Section)

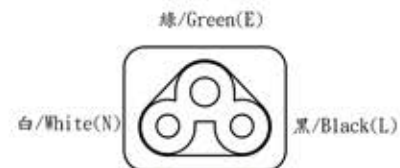

插頭端面圖  
(Dimensions of Plug Face)

#### 包裝方式(Packing)

扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X 250
包裝數量 (Packing Q'ty)	PCS
標籤(Label)	Detachable Label
正側唛頭 (Carton Print)	依客戶要求印刷 (See Purchase Order)

1. 高壓測試:1500V/1Sec <1mA  
(Hi-Pot Test:1500v/1Sec <1mA)

電線印字內容 Wire Printed	使用克實線材 四印字 (Un-Filler, Gravure)	紙箱唛頭標碼 Shipping Mark
E322763 (UL) SVT 18AWG(0.824mm <sup>2</sup> )x3C VW-1 105°C 300V /FT c(UL) SVT 18AWG(0.824mm <sup>2</sup> )x3C FT2 105°C 300V -LF- (UL) SVT 18AWG(0.824mm <sup>2</sup> )x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SVT 18AWG(0.824mm <sup>2</sup> )x3C FT2 105°C 300V 1L43774 -F- -LF-		◊ CnC ◊

SIGNATURE	NAME	DATE		
APPROVED			2011	
M.F.G. CHECKED			00/1123	新版發行 楊承正
Q.A. CHECKED			REV DATE	DESCRIPTION SYMBOL
DRAWN	楊承正	2011/11/23	PART No.	800-18-66D-BL-0006F
PROJ.	CUSTOMER		DWG No.	

**CnC Tech, LLC**

Industrial Cable and Connector Technology