



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# ATC 800 A Series NPO Ceramic, High RF Power Ultra-Low ESR Multilayer Capacitors

- Case A Size (.055" x .055")
- Rugged, reliable NPO dielectric
- Case optimized for highest self resonant frequency
- Capacitance Range 0.1 pF to 100 pF
- Lowest ESR
- Capable of highest RF Power
- RoHS Compliant / Lead Free

ATC's 800 A Series offers superb performance in demanding high RF power applications requiring consistent and reliable operation. The combination of highly conductive metal electrode systems, optimized case geometries, and proprietary dielectrics, yields the lowest ESR. ATC's new NPO low loss rugged dielectrics are designed to provide superior heat transfer in high RF power applications. Ultra-low ESR and superior thermal performance insure that the 800 A Series products are your best choice for high RF power applications from UHF through microwave frequencies.

Typical applications: UHF and Microwave Communications Systems, Wireless Communications, Public Safety Radio, Telecom, WiMAX, and Satellite Systems.

Typical circuit applications: High RF Power Filter Networks, Combiners, Couplers, Matching Networks, Output Coupling, Antenna Coupling, and DC Blocking and Bypassing.

## ENVIRONMENTAL TESTS

ATC 800 A Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

### THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A

### MOISTURE RESISTANCE:


MIL-STD-202, Method 106

### LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

### LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C  
200% WVDC applied

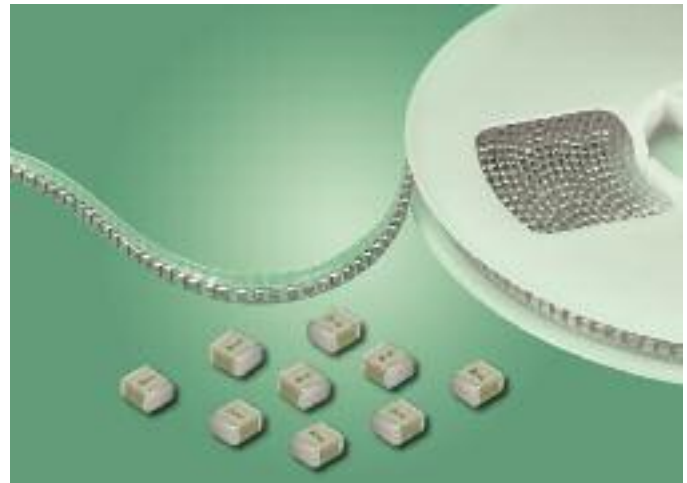

## ELECTRICAL AND MECHANICAL SPECIFICATIONS

**QUALITY FACTOR (Q):** > 2000 @ 1 MHz

**TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):**  
0 ±30 PPM/°C (-55°C to +125°C)

### INSULATION RESISTANCE (IR):

0.1 pF to 100 pF:  
10<sup>5</sup> Megohms min. @ +25°C at rated WVDC  
10<sup>4</sup> Megohms min. @ +125°C at rated WVDC

### WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2

### DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case A: 250% of rated WVDC for 5 secs. (625 VDC)

**RETRACE:** Less than ±(0.02% or 0.02 pF), whichever is greater

**AGING EFFECTS:** None

### PIEZOELECTRIC EFFECTS:

None  
(No capacitance variation with voltage or pressure)

**CAPACITANCE DRIFT:** ±(0.02% or 0.02 pF), whichever is greater

### OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage)

### TERMINATION STYLE:

RoHS Compliant and Solder Plate  
See Mechanical Configurations, page 3

**TERMINAL STRENGTH:** Terminations for chips withstand a pull of 5 lbs. min., 10 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



A M E R I C A N      T E C H N I C A L      C E R A M I C S

**ATC North America**  
+1-631-622-4700  
sales@atceramics.com

**ATC Europe**  
+46 8 6800410  
sales@atceramics-europe.com

**ATC Asia**  
+86-755-2396-8759  
sales@atceramics-asia.com



[www.atceramics.com](http://www.atceramics.com)

ATC # 001-1032 Rev. H, 10/10



# ATC 800 A Capacitance Values


CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC
0R1	0.1	B	250	2R2	2.2	B, C, D	250	160	16	F, G, J, K, M	250
0R2	0.2	B, C		2R4	2.4			180	18		
0R3	0.3			2R7	2.7			200	20		
0R4	0.4			3R0	3.0			220	22		
0R5	0.5			3R3	3.3			240	24		
0R6	0.6	3R6		3.6	270			27			
0R7	0.7	3R9		3.9	300			30			
0R8	0.8	4R3		4.3	330			33			
0R9	0.9	4R7		4.7	360			36			
1R0	1.0	B, C, D		5R1	5.1			390	39		
1R1	1.1			5R6	5.6	430		43			
1R2	1.2			6R2	6.2	470		47			
1R3	1.3			6R8	6.8	510		51			
1R4	1.4			7R5	7.5	560		56			
1R5	1.5			8R2	8.2	620		62			
1R6	1.6			9R1	9.1	680		68			
1R7	1.7			100	10	750		75			
1R8	1.8			110	11	820		82			
1R9	1.9			120	12	910		91			
2R0	2.0	130		13	101	100					
2R1	2.1	150	15								

**VRMS = 0.707 X WVDC**

**SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.**

CAPACITANCE TOLERANCE								
Code	B	C	D	F	G	J	K	M
<b>Tol.</b>	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

### ATC PART NUMBER CODE

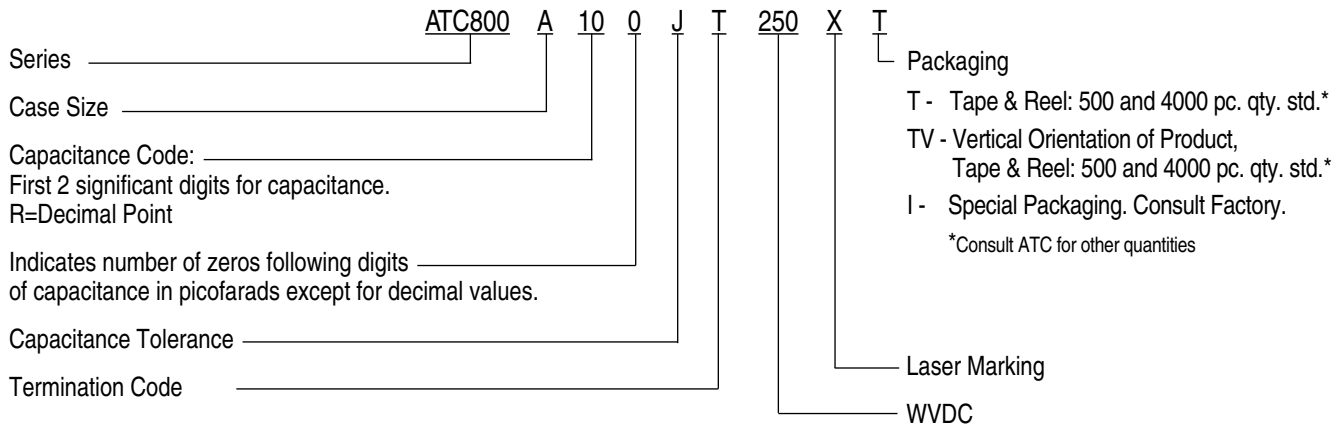

The above part number refers to a 800 A Series (case size A) 10 pF capacitor,

J tolerance (±5%), 150 WVDC, with T termination (Tin Plated over Nickel Barrier, RoHS Compliant), laser marking and tape and reel packaging.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.





## A M E R I C A N T E C H N I C A L C E R A M I C S

**ATC North America**  
+1-631-622-4700 sales@atceramics.com



**ATC Europe**  
+46 8 6800410 sales@atceramics-europe.com

**ATC Asia**  
86-755-2396-8759 sales@atceramics-asia.com


# ATC 800 A Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
800A	T	A  Solderable Nickel Barrier		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	<b>RoHS Compliant</b> Tin Plated over Nickel Barrier Termination
800A	W	A  Solder Plate		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	Tin/Lead Solder Plated over Nickel Barrier Termination

# ATC 800 A Non-Magnetic Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
800A	TN	A  Non-Mag Solderable Barrier		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	<b>RoHS Compliant</b> Tin Plated over Non-Magnetic Barrier Termination

## Suggested Mounting Pad Dimensions

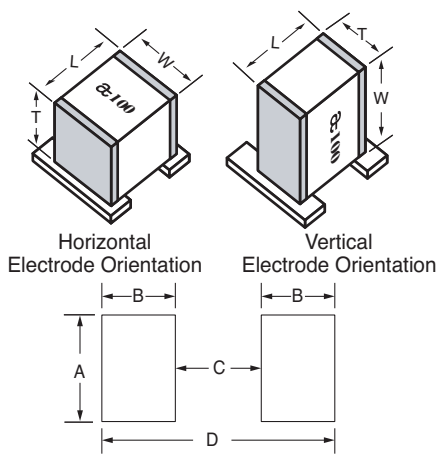

Horizontal Electrode Orientation

Vertical Electrode Orientation

Case A

	Pad Size	A Min.	B Min.	C Min.	D Min.
Vertical Mount	Normal	.070	.050	.030	.130
	High Density	.050	.030	.030	.090
Horizontal Mount	Normal	.080	.050	.030	.130
	High Density	.060	.030	.030	.090

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at [www.atceramics.com/productfinder/default.asp](http://www.atceramics.com/productfinder/default.asp). Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 2006 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-1032 Rev. H, 10/10

A M E R I C A N T E C H N I C A L C E R A M I C S



ATC North America  
+1-631-622-4700 sales@atceramics.com

ATC Europe  
+46 8 6800410 sales@atceramics-europe.com

ATC Asia  
86-755-2396-8759 sales@atceramics-asia.com

w w w . a t c e r a m i c s . c o m

# ATC 800 A Performance Data

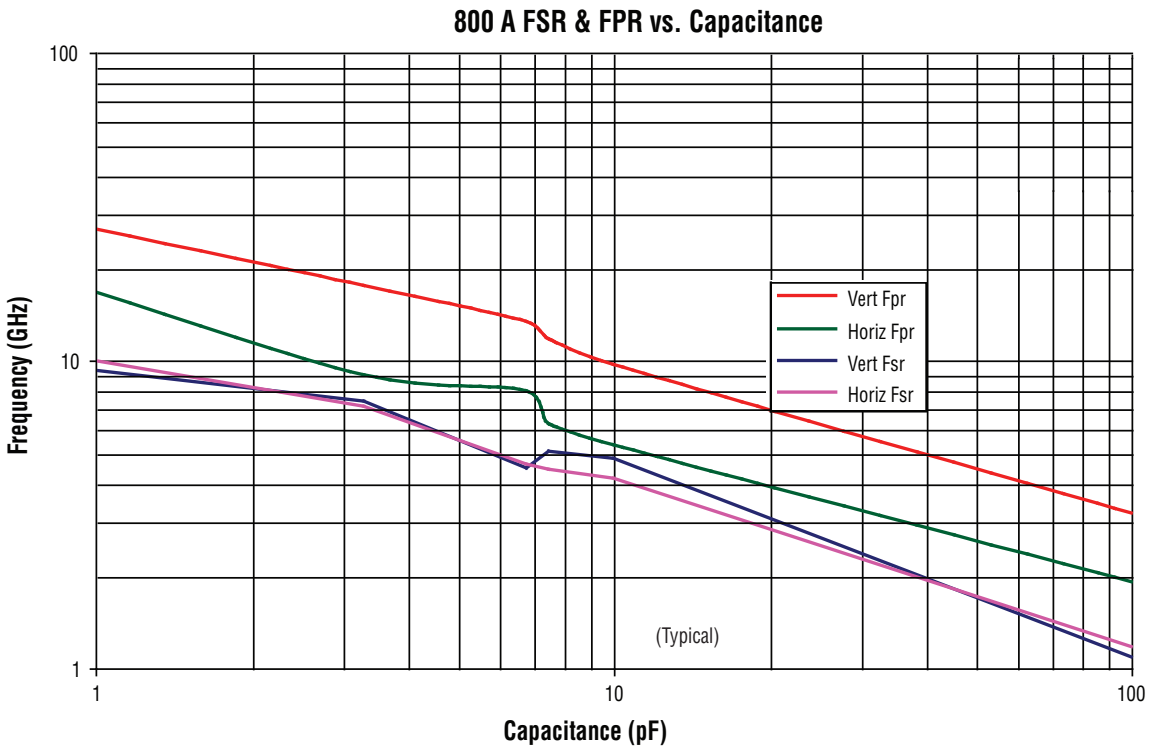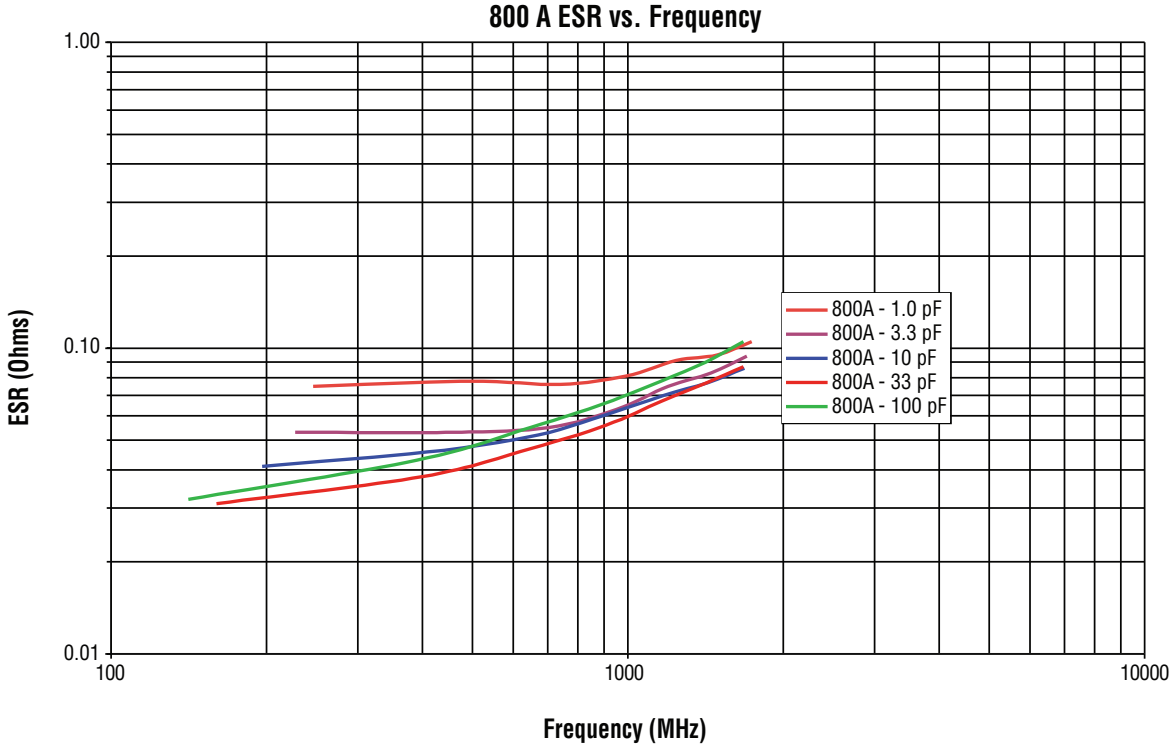

## ATC 800 A Series Data Sheet Test Condition Description

Capacitors horizontally mounted in series microstrip configuration on 23.3-mil thick Rogers RO4350<sup>®</sup> softboard, 52-mils wide 1/2 oz. Cu traces.

**FSR** = lowest frequency at which S11 response, referenced at capacitor edge, crosses real axis on Smith Chart.

**FPR** = lowest frequency at which there is a notch in S21 magnitude response.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America  
+1-631-622-4700 sales@atceramics.com

ATC Europe  
+46 8 6800410 sales@atceramics-europe.com

ATC Asia  
86-755-2396-8759 sales@atceramics-asia.com