



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Subminiature Fuse, 3.6 x 10 mm, Time-lag T, 250 VAC



IEC 60127-3 · 250VAC · Time-Lag T

See below:
[Approvals and Compliances](#)

Description

- Ceramic Tube
- IEC Standard Miniature Fuse

Applications

- Digital Consumer Electronics
- Power supplies


References

[Packaging Details](#)

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

Rated Voltage	250VAC
Rated current	0.1 - 5A
Breaking Capacity	35A - 40A
Characteristic	Time-Lag T
Mounting	PCB,THT
Admissible Ambient Air Temp.	-20°C to 70°C
Material: Tube	Ceramic
Material: Endcaps	Nickel-Plated Brass
Material: Axial Leads	Tin-Plated Copper
Unit Weight	0.6 g
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	 Rated current, Rated Voltage, Characteristic, Approvals

Soldering Methods	Wave Soldering Profile
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A




Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

Approvals



The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: SPT 3.6x10

Approval Logo	Certificates	Certification Body	Description
	VDE Approvals	VDE	VDE Certificate Number: 40015228
	UL Approvals	UL	UL File Number: E184831
	CQC Approvals	CQC	CCC Certificate Number: CQC09012037793 & more


Product standards

Product standards that are referenced

Organization	Design	Standard	Description
	Designed according to	UL 248-14	Low voltage fuses - Part 14: Additional fuses
	Designed according to	CSA22.2 No. 248.14	Low-Voltage Fuses - Part 14: Supplemental Fuses





Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment.


Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimension [mm]


10 mm

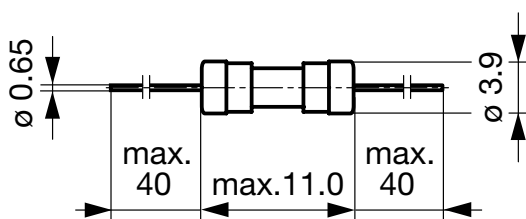


Pre-Arcing Time

Rated Current I_n	2.1 x I_n max.	2.75 x I_n min.	2.75 x I_n max.	4.0 x I_n min.	4.0 x I_n max.	10.0 x I_n min.	10.0 x I_n max.
0.1 A - 5 A	120 s	400 ms	10 s	150 ms	3 s	20 ms	150 ms

Time-Current-Curves

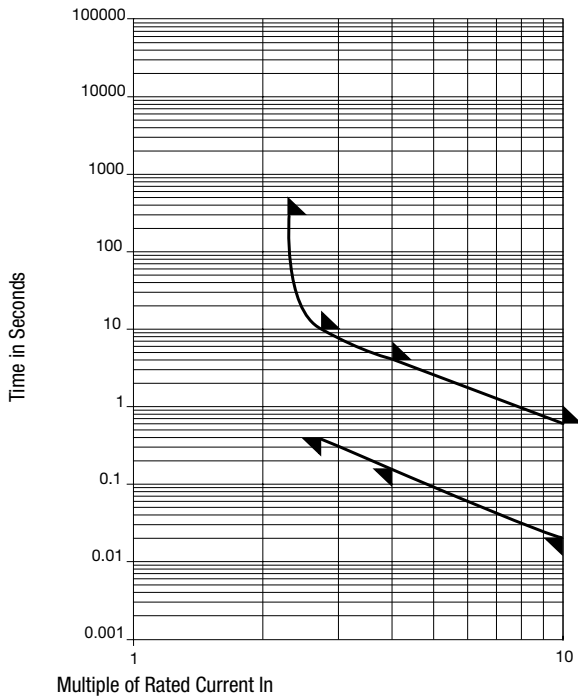

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 In max. [mV]	Voltage Drop 1.0 In typ. [mV]	Power Dissipation 1.5 In max. [mW]	Melting I ² t 10.0 In typ. [A ² s]		Order Number
0.1	250	1)	350	300	170	0.08	● ● ●	8020.0504.PT
0.125	250	1)	300	255	180	0.15	● ● ●	8020.0505.PT
0.2	250	1)	260	200	200	0.4	● ● ●	8020.0507.PT
0.25	250	1)	240	160	220	0.2	● ● ●	8020.0508.PT
0.315	250	1)	220	150	250	0.75	● ● ●	8020.0509.PT
0.4	250	1)	200	110	280	0.45	● ● ●	8020.0510.PT
0.5	250	1)	190	140	310	2.6	● ● ●	8020.0511.PT
0.63	250	1)	180	120	360	5	● ● ●	8020.0512.PT
0.8	250	1)	160	80	430	7.5	● ● ●	8020.0513.PT
1	250	1)	140	120	500	11	● ● ●	8020.0514.PT
1.25	250	1)	130	70	600	5	● ● ●	8020.0515.PT
1.6	250	1)	120	90	730	17.5	● ● ●	8020.0516.PT
2	250	1)	100	80	870	32	● ● ●	8020.0517.PT
2.5	250	1)	100	75	1000	66	● ● ●	8020.0518.PT
3.15	250	1)	100	80	1200	131	● ● ●	8020.0519.PT
4	250	2)	100	70	1400	120	● ● ●	8020.0520.PT
5	250	2)	100	70	-	250	● ● ●	8020.0521.PT

■ Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 35 A @ 250 VAC

2) 40 A @ 250 VAC

Packaging Unit .xx = .PT Bulk (1000 pcs.)