



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



This product is on the Qualified Product Listing under the Defense Standardization Program. Check our listing [here](#).




SCS Static Shield Bag 81705 Series are manufactured from four layers - static dissipative coating, polyester, metal and polyethylene laminate. The polyester dielectric in concert with the metal layer provides discharge shielding. The exterior is static dissipative and allows electrostatic charges to be removed when grounded. Film is qualified to MIL-PRF-81705E Type III, Class 2.

Standard stock bags are converted per MIL-DTL-117H unless otherwise requested. As such, the bag markings will contain not only the required MIL-PRF-81705E markings but also the stamp shown here:

SCS
MIL-DTL-117H
TYPE II CLASS H STYLE 2
STATIC SHIELD BAG, 81705 SERIES
LOT NO.

Note: Default color is red. Artwork not to scale.

If your packaging needs do not include meeting MIL-DTL-117H, bags can be converted from qualified film per your packaging requirements.

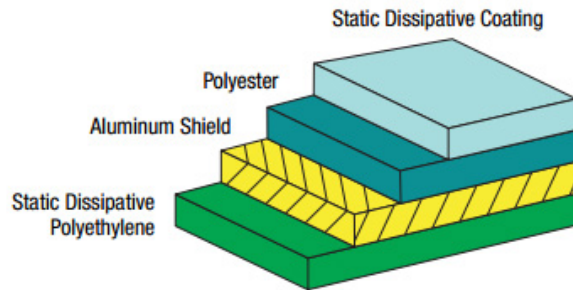

RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2017/01/12, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See SCS [Warranty, Limitation of Liability and Remedies](#).

Physical	Typical Value	Testing Method
Tensile Strength	4600 PSI, 32 MPa	ASTM D882
Puncture Resistance	12 lbs, 53 N	MIL-STD-3010 Method 2065
Seam Strength	Pass	MIL-STD-3010 Method 2024
Thickness	2.8 mils, 0.071 mm +/-10%	MIL-STD-3010 Method 1003
Marking Abrasion Resistance	Pass	MIL-PRF-81705E Method 4.6.6
Contact Corrosivity	Pass	MIL-STD-3010 Method 3005*
Transparency	40%	MIL-STD-3010 Method 4034

Electrical	Typical Value	Testing Method
EMI Attenuation	≥ 10 db	MIL-PRF-81705E Method 4.6.7
ESD Shielding	≤ 10 nJ	MIL-PRF-81705E Method 4.6.9
Surface Resistivity - Interior	≥ 1 x 10 ⁵ to < 1 x 10 ¹² ohms/sq	MIL-PRF-81705E Method 4.6.8
Surface Resistivity - Exterior	< 1 x 10 ¹² ohms/sq	MIL-PRF-81705E Method 4.6.8
Static Decay	≤ 2 seconds	MIL-STD-3010 Method 4046

Heat Sealing Conditions	Typical Value
Temperature	360°F, 182°C
Time	2 seconds
Pressure	60 PSI, 414 KPa

*Passes on all surfaces noted in MIL-PRF-81705E Special Requirement 6/

Bag is free of silicones and heavy metals.



Made in the United States of America

Specifications and procedures subject to change without notice.

STATIC SHIELD BAG, 81705 SERIES		
926 JR Industrial Drive, Sanford, NC 27332 WEB SITE: StaticControl.com PHONE (919) 718-0000	DRAWING NUMBER 81705 Bags	DATE April 2017

