



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CP M SNT3 250W 24V 10A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



PRO-M = Power-Reliable-Optimized

The perfectly reliable power supply for automation technology.

The ten different versions for the 24V-DC power supply all feature a solid but thin metal housing which enables them to be installed without any side gaps. This results in less space required on the mounting rail. Wide range of AC/DC inputs and a wide temperature range enable them to be used anywhere. Because of its high efficiency, resistance to overloads and high power reserves, the PRO-M is a trusted power supply for use in any application. The three-phase PRO-M power supply modules continue to function reliably when one phase fails (i.e., in two-phase mode).

General ordering data

Order No.	8951400000
Type	CP M SNT3 250W 24V 10A
Version	Power supply, switch-mode power supply unit
GTIN (EAN)	4032248742615
Qty.	1 pc(s).

CP M SNT3 250W 24V 10A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

Width	60 mm	Height	130 mm
Depth	150 mm	Weight	1.25 kg
Net weight	1,293 g		

Temperatures

Operating temperature	-25 °C...+70 °C	Storage temperature	-40 °C...+85 °C
-----------------------	-----------------	---------------------	-----------------

Input

AC current consumption	0.5 A @ 3 x 500 V AC / 0.55 A @ 3 x 400 V AC	DC current consumption	0.35 A @ 800 V DC / 0.6 A @ 450 V DC
DC input voltage range	450...800 V DC (max. 500 V DC acc. to UL508)	Frequency range AC	47...63 Hz
Input fuse	Yes	Input fuse (internal)	Yes
Input voltage range AC	3 x 320...3 x 575 V AC / 2 x 360...2 x 575 V AC	Making current	max. 50 A
Recommended back-up fuse	2 A / DI, safety fuse 2...3 A, Char. C, circuit breaker	Wire connection method	Screw connection
rated input voltage	3 x 400...3 x 500 V AC (wide-range input)		

output

Output current	10 A	Output power	240 W
Output voltage type	DC	Output voltage, max.	29.5 V
Output voltage, min.	22.5 V	Output voltage, note	(adjustable via potentiometer on front)
Overload protection	Yes	Parallel connection option	yes, max. 5
Powerboost @ 24 V DC, 60 °C	12 A for 1 min, ED = 5 %	Rated (nominal) output current @ U_{Nom}	10 A @ 60 °C
Wire connection method	Screw connection	continuous output current @ 24 V DC	12 A @ 45 °C, 10.7 A @ 55 °C, 7.5 A @ 70 °C
rated output voltage	24 V DC \pm 1 %	residual ripple, breaking spikes	< 50 mV _{SS} @ 24 V DC, I_N

General data

AC failure bridging time @ I_{Nom}	> 40 ms @ 3 x 500 V AC / > 20 ms @ 3 x 400 V AC	Current limiting	> 120 % I_N
Degree of efficiency	89 % @ 3 x 500 V AC / 90 % @ 3 x 400 V AC	Housing version	Metal, corrosion resistant
Indication	Operation, green LED	MTBF	> 500,000 h acc. to IEC 1709 (SN29500)
Mounting position, installation notice	Horizontal on TS35 mounting rail, with 50 mm of clearance at top and bottom for air circulation. Can be mounted side by side with no space in between.	Operating temperature	-25 °C...+70 °C
Power factor (approx.)	> 0.65 @ 3 x 500 V AC / > 0.75 @ 3 x 400 V AC	Protection against over-heating	Yes
Protection against reverse voltages from the load	30...35 V DC	Short-circuit protection	Yes
Weight	1.25 kg		

CP M SNT3 250W 24V 10A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data

EMC / shock / vibration

Limiting of mains voltage harmonic currents	in accordance with EN 61000-3-2	Noise emission acc. to EN55022	Class B
Interference immunity test acc. to	EN 61000-4-2 (ESD) EN 61000-4-3 and EN 61000-4-8 (fields) EN 61000-4-4 (burst) EN 61000-4-5 (surge) EN 61000-4-6 (conducted) EN 61000-4-11 (dips)	Shock resistance IEC 60068-2-27	30 g in all directions

Insulation coordination

Class of protection	I, with PE connection	Insulation voltage	3 kV input/output; 2 kV input/earth; 0.5 kV output/earth
Pollution severity	2	electrical isolation, input-earth	2 kV
electrical isolation, input-output	3 kV	electrical isolation, output-earth	0.5 kV

Electrical safety (applied standards)

Electrical machine equipment	Acc. to EN60204	For use with electronic equipment	Acc. to EN50178 / VDE0160
Protection against dangerous shock currents	Acc. to VDE0106-101	Protective separation / protection against electrical shock	VDE0100-410 / acc. to DIN57100-410
Safety extra-low voltage	SELV acc. to EN60950, PELV acc. to EN60204	Safety transformers for switch-mode power supplies	Acc. to EN 61558-2-17

Connection data (input)

Conductor cross-section, AWG/kcmil , max.	12	Conductor cross-section, AWG/kcmil , min.	26
Conductor cross-section, flexible , min.	0.5 mm ²	Conductor cross-section, rigid , max.	6 mm ²
Conductor cross-section, rigid , min.	0.5 mm ²	Number of terminals [Input]	4 for L1/L2/L3/PE
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
Wire connection cross section, flexible (input), max.	2.5 mm ²		

Connection data (output)

Conductor cross-section, AWG/kcmil , max.	12	Conductor cross-section, AWG/kcmil , min.	26
Conductor cross-section, flexible , max.	2.5 mm ²	Conductor cross-section, flexible , min.	0.5 mm ²
Conductor cross-section, rigid , max.	6 mm ²	Conductor cross-section, rigid , min.	0.5 mm ²
Number of terminals [Output]	5 (++) / (-)	Tightening torque, max.	0.6 Nm
Tightening torque, min.	0.5 Nm		

CP M SNT3 250W 24V 10A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Approvals**

Institute (GERMLLOYD)



Certificate No. (GERMLLOYD)

94767-10

Institute (cULus)



Certificate no. (cULus)

E258476VOL1SEC28

Institute (cURus)



Certificate No. (cURus)

E255651VOLX3A15

Classifications

ETIM 3.0

EC001039

eClass 5.1

27-04-90-02

eClass 6.2

27-04-90-04

eClass 7.1

27-04-90-04

Approvals

Approvals



ROHS

Conform

Downloads

Package insert

[Operating instructions](#)

Declaration of Conformity

[K469_12_11.pdf](#)

PDF

[Warranty information](#)

EPLAN

[8951400000.ema](#)[3-D model](#)


Data sheet...

CP M SNT3 250W 24V 10A

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Electric symbol

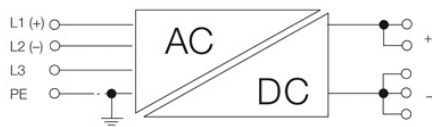

With DC connection, note polarity
Two-phase operation also possible