



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Accessories

| | | |
|--------------------|--|------|
| Accessories | Introduction | J.2 |
| | Wire end ferrules with plastic collar | J.4 |
| | Twin-wire end ferrules with plastic collar | J.10 |
| | Wire end ferrules for short-circuit and earth-fault-proof cables | J.13 |
| | Wire end ferrules with plastic collar, special sizes | J.14 |
| | Wire end ferrules without plastic collar | J.15 |
| | Assortment of wire end ferrules | J.16 |
| | Insulated cable connectors, PVC, with conical cable entry | J.18 |

Accessories

Weidmüller stocks a comprehensive range of wire end ferrules and insulated cable lugs for immediate supply.

Wire end ferrules

Wire end ferrules ensure the long-term quality of electrical connections. Another advantage is their usefulness during installation. The wide range of products embraces wire end ferrules with or without plastic collars and twin wire end ferrules in all the colours normally required by users.



Insulated cable lugs

Insulated cable lugs ensure the long-term quality of electrical connections. Most of the products in the range (apart from the butt connectors) have a conical inlet.

This guarantees optimum entry of the conductor as the strands are automatically centred.



Tools

Tools for insulated cable lugs

| Tool | Order No. | 0.5 - 1.5 | Type of contact 1.5 - 2.5 | 4.0 - 6.0 |
|---------|------------|-----------|------------------------------|-----------|
| CTI 6 | 9006120000 | ● | ● | ● |
| CTI 6 G | 9202850000 | ● | ● | ● |
| HTI 15 | 9014400000 | ● | ● | |
| Station | | red | blue | yellow |

Crimping tools for ferrules


| | PZ 1.5 | stripax® plus 2.5 | PZ 3 | PZ 4 | PZ 6 roto | PZ 6 HEX | PZ 6/5 | PZ 16 | PZ 50 |
|-------------------------|------------|----------------------|------------|------------|--------------|------------|------------|------------|------------|
| Order No. | | | | | | | | | |
| | 9005990000 | 9020000000 | 0567300000 | 9012500000 | 9014350000 | 9013650000 | 9011460000 | 9012600000 | 9006450000 |
| Ferrule mm ² | | | | | | | | | |
| H 0.14 | ● | | | | ● | ● | | | |
| H 0.25 | ● | | | | ● | ● | ● | | |
| H 0.34 | ● | | | | ● | ● | ● | | |
| H 0.5 | ● | ● ¹ | ● | ● | ● | ● | ● | | |
| H 0.75 | ● | ● ¹ | ● | ● | ● | ● | ● | | |
| H 1.0 | ● | ● ¹ | ● | ● | ● | ● | ● | | |
| H 1.5 | ● | ● ¹ | ● | ● | ● | ● | ● | | |
| H 2.5 | | ● ¹ | ● | ● | ● | ● | ● | | |
| H 4.0 | | | ● | ● | ● | ● | ● | | |
| H 6.0 | | | ● | | ● | ● | ● | ● | |
| H 10.0 | | | | | | | | ● | |
| H 16.0 | | | | | | | | ● | |
| H 25.0 | | | | | | | | | ● |
| H 35.0 | | | | | | | | | ● |
| H 50.0 | | | | | | | | | ● |

●¹ = ferrules in strip form only

Twin wire end ferrules are to be crimped according to the following table:

| Tool | Order No. | H 0.5 | H 0.75 | H 1.0 | H 1.5 | Ferrules H 2.5 | H 4.0 | H 6.0 | H 10.0 | H 16.0 |
|-----------|------------|---------------------|---------------------|---------------------|---------------------|-------------------|-------------------|-------|--------|--------|
| PZ 1.5 | 9005990000 | ● | ● | | | | | | | |
| PZ 3 | 0567300000 | ● | ● | ● | ● | ● | | | | |
| PZ 4 | 9012500000 | ● | ● | ● | ● | ● | | | | |
| PZ 6 roto | 9014350000 | ● | ● | ● | ● | ● | ● | | | |
| PZ 6/5 | 9011460000 | | ● | ● | ● | ● | ● | | | |
| Station | | 1.5 mm ² | 1.5 mm ² | 2.5 mm ² | 2.5 mm ² | 4 mm ² | 6 mm ² | | | |
| PZ ZH 16 | 9013600000 | | | | | | | ● | ● | ● |

Wire end ferrules with plastic collar



- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 0.14 to 150 mm² (AWG 26-300MCM)
Tin-plated copper
Dimensional tolerances to DIN 46228 part 4

Weidmüller colour code

packed loose



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-----------|-------------------|---------|------|------|------|------|------|------|------------------|---------------|------|------------|
| H0.25/10 | 0.25 | 24 | 10.0 | 6.0 | 0.8 | 1.8 | 0.15 | 0.25 | 8.0 | ● light blue | 500 | 9025740000 |
| H0.25/12 | 0.25 | 24 | 12.0 | 8.0 | 0.8 | 1.8 | 0.15 | 0.25 | 10.0 | ● light blue | 500 | 9025760000 |
| H0.34/10 | 0.34 | 22 | 10.0 | 6.0 | 0.8 | 2.0 | 0.15 | 0.25 | 8.0 | ● turquoise | 500 | 9025750000 |
| H0.34/12 | 0.34 | 22 | 12.0 | 8.0 | 0.8 | 2.0 | 0.15 | 0.25 | 10.0 | ● turquoise | 500 | 9025770000 |
| H0.5/12 | 0.50 | 20 | 12.0 | 6.0 | 1.0 | 2.6 | 0.15 | 0.25 | 8.0 | ● orange | 500 | 0409500000 |
| H0.5/14 | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | ● orange | 500 | 0690700000 |
| H0.5/16 | 0.50 | 20 | 16.0 | 10.0 | 1.0 | 2.6 | 0.15 | 0.25 | 12.0 | ● orange | 500 | 9025870000 |
| H0.75/12 | 0.75 | 18 | 12.0 | 6.0 | 1.2 | 2.8 | 0.15 | 0.25 | 8.0 | ○ white | 500 | 0409600000 |
| H0.75/14 | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ○ white | 500 | 0462900000 |
| H0.75/16 | 0.75 | 18 | 16.0 | 10.0 | 1.2 | 2.8 | 0.15 | 0.25 | 12.0 | ○ white | 500 | 9025860000 |
| H0.75/18 | 0.75 | 18 | 18.0 | 12.0 | 1.2 | 2.8 | 0.15 | 0.25 | 14.0 | ○ white | 500 | 9025910000 |
| H1.0/12 | 1.00 | 17 | 12.0 | 6.0 | 1.4 | 3.0 | 0.15 | 0.25 | 8.0 | ● yellow | 500 | 0409700000 |
| H1.0/14 | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 10.0 | ● yellow | 500 | 0463000000 |
| H1.0/16 | 1.00 | 17 | 16.0 | 10.0 | 1.4 | 3.0 | 0.15 | 0.25 | 12.0 | ● yellow | 500 | 9025950000 |
| H1.0/18 | 1.00 | 17 | 18.0 | 12.0 | 1.4 | 3.0 | 0.15 | 0.25 | 15.0 | ● yellow | 500 | 9025930000 |
| H1.5/14 | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.5 | 0.15 | 0.25 | 10.0 | ● red | 500 | 0463100000 |
| H1.5/16 | 1.50 | 16 | 16.0 | 10.0 | 1.7 | 3.5 | 0.15 | 0.25 | 12.0 | ● red | 500 | 0635100000 |
| H1.5/24 | 1.50 | 16 | 24.0 | 18.0 | 1.7 | 3.5 | 0.15 | 0.25 | 20.0 | ● red | 500 | 0565600000 |
| H2.5/15D | 2.50 | 14 | 15.0 | 8.0 | 2.2 | 4.2 | 0.15 | 0.25 | 10.0 | ● blue | 500 | 9019160000 |
| H2.5/19D | 2.50 | 14 | 19.0 | 12.0 | 2.2 | 4.2 | 0.15 | 0.25 | 14.0 | ● blue | 500 | 9019170000 |
| H2.5/25D | 2.50 | 14 | 25.0 | 18.0 | 2.2 | 4.2 | 0.15 | 0.25 | 20.0 | ● blue | 500 | 9019180000 |
| H4.0/18D | 4.00 | 12 | 18.0 | 10.0 | 2.8 | 4.8 | 0.2 | 0.3 | 12.0 | ● grey | 500 | 9019190000 |
| H4.0/20D | 4.00 | 12 | 20.0 | 12.0 | 2.8 | 4.8 | 0.2 | 0.3 | 14.0 | ● grey | 500 | 9019200000 |
| H4.0/26D | 4.00 | 12 | 26.0 | 18.0 | 2.8 | 4.8 | 0.2 | 0.3 | 20.0 | ● grey | 100 | 9019210000 |
| H6.0/20 | 6.00 | 10 | 20.0 | 12.0 | 3.5 | 6.3 | 0.2 | 0.3 | 14.0 | ● black | 100 | 0533500000 |
| H6.0/26 | 6.00 | 10 | 26.0 | 18.0 | 3.5 | 6.3 | 0.2 | 0.3 | 20.0 | ● black | 100 | 0565700000 |
| H10.0/22 | 10.00 | 7 | 22.0 | 12.0 | 4.5 | 7.6 | 0.2 | 0.4 | 15.0 | ● ivory | 100 | 0534200000 |
| H10.0/28 | 10.00 | 7 | 28.0 | 18.0 | 4.5 | 7.6 | 0.2 | 0.4 | 21.0 | ● ivory | 100 | 0565800000 |
| H16.0/22 | 16.00 | 6 | 22.0 | 12.0 | 5.8 | 8.8 | 0.2 | 0.4 | 15.0 | ● green | 100 | 0565900000 |
| H16.0/28 | 16.00 | 6 | 28.0 | 18.0 | 5.8 | 8.8 | 0.2 | 0.4 | 21.0 | ● green | 100 | 0566000000 |
| H25.0/30 | 25.00 | 3 | 30.0 | 16.0 | 7.3 | 11.2 | 0.2 | 0.4 | 18.0 | ● brown | 50 | 0317000000 |
| H25.0/36 | 25.00 | 3 | 36.0 | 22.0 | 7.3 | 11.2 | 0.2 | 0.4 | 24.0 | ● brown | 50 | 0317100000 |
| H35.0/30 | 35.00 | 2 | 30.0 | 16.0 | 8.3 | 12.7 | 0.2 | 0.4 | 19.0 | ● beige | 50 | 0317200000 |
| H35.0/39 | 35.00 | 2 | 39.0 | 25.0 | 8.3 | 12.7 | 0.2 | 0.4 | 28.0 | ● beige | 50 | 0317300000 |
| H50.0/36 | 50.00 | 1 | 36.0 | 20.0 | 10.3 | 15.0 | 0.3 | 0.5 | 26.0 | ● olive green | 50 | 0444200000 |
| H70.0/37 | 70.00 | 2/0 | 37.0 | 21.0 | 12.7 | 16.0 | 0.35 | 0.6 | 26.0 | ● yellow | 25 | 9028200000 |
| H95.0/44 | 95.00 | 3/0 | 44.0 | 25.0 | 14.7 | 18.0 | 0.35 | 0.6 | 31.0 | ● red | 25 | 9028210000 |
| H120.0/50 | 120.00 | 4/0 | 50.0 | 30.0 | 16.5 | 21.0 | 0.5 | 0.7 | 36.0 | ● blue | 25 | 9028220000 |
| H150.0/54 | 150.00 | 300 MCM | 54.0 | 32.0 | 18.5 | 23.5 | 0.5 | 0.75 | 38.0 | ● yellow | 25 | 9028230000 |


Weidmüller colour code

in multipack bag



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|----------|-------------------|-----|------|------|-----|-----|------|------|------------------|--------------|------|------------|
| H0.14/10 | 0.14 | 26 | 10.0 | 6.0 | 0.6 | 1.5 | 0.15 | 0.25 | 8.0 | ● grey | 500 | 9005180000 |
| H0.14/12 | 0.14 | 26 | 12.0 | 8.0 | 0.6 | 1.5 | 0.15 | 0.25 | 10.0 | ● grey | 500 | 9028240000 |
| H0.25/10 | 0.25 | 24 | 10.0 | 6.0 | 0.8 | 1.8 | 0.15 | 0.25 | 8.0 | ● light blue | 500 | 9026050000 |
| H0.25/12 | 0.25 | 24 | 12.0 | 8.0 | 0.8 | 1.8 | 0.15 | 0.25 | 10.0 | ● light blue | 500 | 9025780000 |
| H0.34/10 | 0.34 | 22 | 10.0 | 6.0 | 0.8 | 2.0 | 0.15 | 0.25 | 8.0 | ● turquoise | 500 | 9026030000 |
| H0.34/12 | 0.34 | 22 | 12.0 | 8.0 | 0.8 | 2.0 | 0.15 | 0.25 | 10.0 | ● turquoise | 500 | 9025790000 |
| H0.5/12 | 0.50 | 20 | 12.0 | 6.0 | 1.0 | 2.6 | 0.15 | 0.25 | 8.0 | ● orange | 500 | 9028260000 |
| H0.5/14 | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | ● orange | 500 | 9026060000 |
| H0.5/16 | 0.50 | 20 | 16.0 | 10.0 | 1.0 | 2.6 | 0.15 | 0.25 | 12.0 | ● orange | 500 | 9028270000 |
| H0.75/12 | 0.75 | 18 | 12.0 | 6.0 | 1.2 | 2.8 | 0.15 | 0.25 | 8.0 | ○ white | 500 | 9028280000 |
| H0.75/14 | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ○ white | 500 | 9026070000 |
| H0.75/16 | 0.75 | 18 | 16.0 | 10.0 | 1.2 | 2.8 | 0.15 | 0.25 | 12.0 | ○ white | 500 | 9028290000 |
| H0.75/18 | 0.75 | 18 | 18.0 | 12.0 | 1.2 | 2.8 | 0.15 | 0.25 | 14.0 | ○ white | 500 | 9028300000 |
| H1.0/12 | 1.00 | 17 | 12.0 | 6.0 | 1.4 | 3.0 | 0.15 | 0.25 | 8.0 | ● yellow | 500 | 9028310000 |
| H1.0/14 | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 10.0 | ● yellow | 500 | 9026080000 |
| H1.0/16 | 1.00 | 17 | 16.0 | 10.0 | 1.4 | 3.0 | 0.15 | 0.25 | 12.0 | ● yellow | 500 | 9028320000 |
| H1.0/18 | 1.00 | 17 | 18.0 | 12.0 | 1.4 | 3.0 | 0.15 | 0.25 | 15.0 | ● yellow | 500 | 9028340000 |
| H1.5/14 | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.5 | 0.15 | 0.25 | 10.0 | ● red | 500 | 9026090000 |
| H1.5/16 | 1.50 | 16 | 16.0 | 10.0 | 1.7 | 3.5 | 0.15 | 0.25 | 12.0 | ● red | 500 | 9028350000 |
| H2.5/15 | 2.50 | 14 | 15.0 | 8.0 | 2.2 | 4.2 | 0.15 | 0.25 | 10.0 | ● blue | 500 | 9026100000 |
| H4.0/18 | 4.00 | 12 | 18.0 | 10.0 | 2.8 | 4.8 | 0.2 | 0.3 | 12.0 | ● grey | 250 | 9026010000 |



- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 0.5 to 2.5 mm² (AWG 22-14)
 Tin-plated copper
 Dimensional tolerances to DIN 46228 part 4

Weidmüller colour code

Strip of wire end ferrules



Ordering data

| Type | ϕ mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|----------|------------------------|-----|------|-----|-----|-----|------|------|------------------|--------|------|------------|
| H0.5/14 | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | orange | 500 | 9004270000 |
| H0.75/14 | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | white | 500 | 9004290000 |
| H1.0/14 | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 10.0 | yellow | 500 | 9004320000 |
| H1.5/14 | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.2 | 0.15 | 0.25 | 10.0 | red | 500 | 9004340000 |
| H2.5/14D | 2.50 | 14 | 14.0 | 8.0 | 2.2 | 4.0 | 0.15 | 0.25 | 11.0 | blue | 500 | 9004360000 |

Weidmüller colour code


Reel of wire end ferrules



Ordering data

| Type | ϕ mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|----------|------------------------|-----|------|-----|-----|-----|------|------|------------------|-----------|------|------------|
| H0.34/12 | 0.34 | 22 | 12.0 | 8.0 | 0.8 | 2.0 | 0.15 | 0.25 | 10.0 | turquoise | 5000 | 9004390000 |
| H0.5/14 | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | orange | 5000 | 9005810000 |
| H0.75/14 | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | white | 5000 | 9005820000 |
| H1.0/14 | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 11.0 | yellow | 5000 | 9005830000 |
| H1.5/14 | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.2 | 0.15 | 0.25 | 10.0 | red | 5000 | 9005840000 |
| H2.5/14D | 2.50 | 14 | 14.0 | 8.0 | 2.2 | 4.0 | 0.15 | 0.25 | 11.0 | blue | 3000 | 9005850000 |

Wire end ferrules with plastic collar



- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 0.5 to 50 mm² (AWG 20-1)
Tin-plated copper
Dimensional tolerances to DIN 46228 part 4

DIN colour code

packed loose



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | VG* | Qty. | Order No. |
|-----------|-------------------|-----|------|------|------|------|------|------|------------------|----------|-------------|------|------------|
| H0.5/12D | 0.50 | 20 | 12.0 | 6.0 | 1.0 | 2.6 | 0.15 | 0.25 | 8.0 | ○ white | T 20A 001 A | 500 | 9019000000 |
| H0.5/14D | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | ○ white | T 20A 002 A | 500 | 9019010000 |
| H0.5/16D | 0.50 | 20 | 16.0 | 10.0 | 1.0 | 2.6 | 0.15 | 0.25 | 12.0 | ○ white | T 20A 003 A | 500 | 9019020000 |
| H0.75/12D | 0.75 | 18 | 12.0 | 6.0 | 1.2 | 2.8 | 0.15 | 0.25 | 8.0 | ● grey | T 20A 004 A | 500 | 9019030000 |
| H0.75/14D | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ● grey | T 20A 005 A | 500 | 9019040000 |
| H0.75/16D | 0.75 | 18 | 16.0 | 10.0 | 1.2 | 2.8 | 0.15 | 0.25 | 12.0 | ● grey | T 20A 006 A | 500 | 9019050000 |
| H0.75/18D | 0.75 | 18 | 18.0 | 12.0 | 1.2 | 2.8 | 0.15 | 0.25 | 14.0 | ● grey | T 20A 007 A | 500 | 9019060000 |
| H1.0/12D | 1.00 | 17 | 12.0 | 6.0 | 1.4 | 3.0 | 0.15 | 0.25 | 8.0 | ● red | T 20A 008 A | 500 | 9019070000 |
| H1.0/14D | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 10.0 | ● red | T 20A 009 A | 500 | 9019080000 |
| H1.0/16D | 1.00 | 17 | 16.0 | 10.0 | 1.4 | 3.0 | 0.15 | 0.25 | 12.0 | ● red | T 20A 010 A | 500 | 9019100000 |
| H1.0/18D | 1.00 | 17 | 18.0 | 12.0 | 1.4 | 3.0 | 0.15 | 0.25 | 15.0 | ● red | T 20A 011 A | 500 | 9019110000 |
| H1.5/14D | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.5 | 0.15 | 0.25 | 10.0 | ● black | T 20A 012 A | 500 | 9019120000 |
| H1.5/16D | 1.50 | 16 | 16.0 | 10.0 | 1.7 | 3.5 | 0.15 | 0.25 | 12.0 | ● black | T 20A 013 A | 500 | 9019130000 |
| H1.5/18D | 1.50 | 16 | 18.0 | 12.0 | 1.7 | 3.5 | 0.15 | 0.25 | 15.0 | ● black | T 20A 014 A | 500 | 9019140000 |
| H1.5/24D | 1.50 | 16 | 24.0 | 18.0 | 1.7 | 3.5 | 0.15 | 0.25 | 20.0 | ● black | T 20A 015 A | 500 | 9019150000 |
| H2.5/15D | 2.50 | 14 | 15.0 | 8.0 | 2.2 | 4.2 | 0.15 | 0.25 | 10.0 | ● blue | T 20A 016 A | 500 | 9019160000 |
| H2.5/19D | 2.50 | 14 | 19.0 | 12.0 | 2.2 | 4.2 | 0.15 | 0.25 | 14.0 | ● blue | T 20A 017 A | 500 | 9019170000 |
| H2.5/25D | 2.50 | 14 | 25.0 | 18.0 | 2.2 | 4.2 | 0.15 | 0.25 | 20.0 | ● blue | T 20A 018 A | 500 | 9019180000 |
| H4.0/18D | 4.00 | 12 | 18.0 | 10.0 | 2.8 | 4.8 | 0.2 | 0.3 | 12.0 | ● grey | T 20A 019 A | 500 | 9019190000 |
| H4.0/20D | 4.00 | 12 | 20.0 | 12.0 | 2.8 | 4.8 | 0.2 | 0.3 | 14.0 | ● grey | T 20A 020 A | 500 | 9019200000 |
| H4.0/26D | 4.00 | 12 | 26.0 | 18.0 | 2.8 | 4.8 | 0.2 | 0.3 | 20.0 | ● grey | T 20A 021 A | 100 | 9019210000 |
| H6.0/20D | 6.00 | 10 | 20.0 | 12.0 | 3.5 | 6.3 | 0.2 | 0.3 | 14.0 | ● yellow | T 20A 022 A | 100 | 9019220000 |
| H6.0/26D | 6.00 | 10 | 26.0 | 18.0 | 3.5 | 6.3 | 0.2 | 0.3 | 20.0 | ● yellow | T 20A 023 A | 100 | 9019230000 |
| H10.0/22D | 10.00 | 7 | 22.0 | 12.0 | 4.5 | 7.6 | 0.2 | 0.4 | 15.0 | ● red | T 20A 024 A | 100 | 9019240000 |
| H10.0/28D | 10.00 | 7 | 28.0 | 18.0 | 4.5 | 7.6 | 0.2 | 0.4 | 21.0 | ● red | T 20A 025 A | 100 | 9019250000 |
| H16.0/22D | 16.00 | 6 | 22.0 | 12.0 | 5.8 | 8.8 | 0.2 | 0.4 | 15.0 | ● blue | T 20A 026 A | 100 | 9019260000 |
| H16.0/28D | 16.00 | 6 | 28.0 | 18.0 | 5.8 | 8.8 | 0.2 | 0.4 | 21.0 | ● blue | T 20A 027 A | 100 | 9019270000 |
| H25.0/30D | 25.00 | 3 | 30.0 | 16.0 | 7.3 | 11.2 | 0.2 | 0.4 | 18.0 | ● yellow | T 20A 028 A | 50 | 9019280000 |
| H25.0/36D | 25.00 | 3 | 36.0 | 22.0 | 7.3 | 11.2 | 0.2 | 0.4 | 24.0 | ● yellow | T 20A 030 A | 50 | 9019300000 |
| H35.0/32D | 35.00 | 2 | 32.0 | 18.0 | 8.3 | 12.7 | 0.2 | 0.4 | 21.0 | ● red | T 20A 032 A | 50 | 9019320000 |
| H35.0/30D | 35.00 | 2 | 30.0 | 16.0 | 8.3 | 12.7 | 0.2 | 0.4 | 19.0 | ● red | T 20A 031 A | 50 | 9019310000 |
| H35.0/39D | 35.00 | 2 | 39.0 | 25.0 | 8.3 | 12.7 | 0.2 | 0.4 | 28.0 | ● red | T 20A 033 A | 50 | 9019330000 |
| H50.0/36D | 50.00 | 1 | 36.0 | 20.0 | 10.3 | 15.0 | 0.3 | 0.5 | 26.0 | ● blue | T 20A 034 A | 50 | 9019340000 |
| H50.0/41D | 50.00 | 1 | 41.0 | 25.0 | 10.3 | 15.0 | 0.3 | 0.5 | 31.0 | ● blue | T 20A 035 A | 50 | 9019350000 |

DIN colour code

in multipack bag



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | VG* | Qty. | Order No. |
|-----------|-------------------|-----|------|------|-----|-----|------|------|------------------|---------|-------------|------|------------|
| H0.5/14D | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | ○ white | T 20A 002 A | 500 | 9019400000 |
| H0.75/14D | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ● grey | T 20A 005 A | 500 | 9019410000 |
| H1.0/14D | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 10.0 | ● red | T 20A 009 A | 500 | 9019420000 |
| H1.5/14D | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.5 | 0.15 | 0.25 | 10.0 | ● black | T 20A 012 A | 500 | 9019430000 |
| H2.5/15 | 2.50 | 14 | 15.0 | 8.0 | 2.2 | 4.2 | 0.15 | 0.25 | 10.0 | ● blue | T 20A 016 A | 500 | 9026100000 |
| H4.0/18 | 4.00 | 12 | 18.0 | 10.0 | 2.8 | 4.8 | 0.2 | 0.3 | 12.0 | ● grey | 019 A | 250 | 9026010000 |

DIN colour code


Strip of wire end ferrules



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. | |
|-----------|-------------------|-----|------|-----|-----|-----|------|------|------------------|---------|-------------|-----------|------------|
| H0.5/14D | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | ○ white | T 20A 002 A | 500 | 9004280000 |
| H0.75/14D | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ● grey | T 20A 005 A | 500 | 9004300000 |
| H1.0/14D | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 10.0 | ● red | T 20A 009 A | 500 | 9004330000 |
| H1.5/14D | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.2 | 0.15 | 0.25 | 10.0 | ● black | T 20A 012 A | 500 | 9004350000 |
| H2.5/14D | 2.50 | 14 | 14.0 | 8.0 | 2.2 | 4.0 | 0.15 | 0.25 | 11.0 | ● blue | T 20A 016 A | 500 | 9004360000 |

VG* = Military designation according to VG 96933-20



- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 0.5 to 2.5 mm² (AWG 20-14)
 Tin-plated copper
 Dimensional tolerances to DIN 46228 part 4

DIN colour code


Reel of wire end ferrules



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | VG* | Qty. | Order No. |
|-----------|-------------------|-----|------|-----|-----|-----|------|------|------------------|---------|-----|------|------------|
| H0.5/14D | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | ○ white | | 5000 | 9005860000 |
| H0.75/14D | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ● grey | | 5000 | 9005870000 |
| H1.0/14D | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 11.0 | ● red | | 5000 | 9005880000 |
| H1.5/14D | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.2 | 0.15 | 0.25 | 10.0 | ● black | | 5000 | 9005890000 |
| H2.5/14D | 2.50 | 14 | 14.0 | 8.0 | 2.2 | 4.0 | 0.15 | 0.25 | 11.0 | ● blue | | 3000 | 9005850000 |

Wire end ferrules with plastic collar



- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 0.14 to 25 mm² (AWG 26-3)
Tin-plated copper
Dimensional tolerances to DIN 46228 part 4

other colour code

packed loose



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-----------|-------------------|-----|------|------|-----|------|------|------|------------------|--------------|------|------------|
| H0.25/10T | 0.25 | 24 | 10.0 | 6.0 | 0.8 | 1.8 | 0.15 | 0.25 | 8.0 | ● yellow | 500 | 9021010000 |
| H0.25/12T | 0.25 | 24 | 12.0 | 8.0 | 0.8 | 1.8 | 0.15 | 0.25 | 10.0 | ● yellow | 500 | 9021020000 |
| H0.5/12D | 0.50 | 20 | 12.0 | 6.0 | 1.0 | 2.6 | 0.15 | 0.25 | 8.0 | ○ white | 500 | 9019000000 |
| H0.5/14D | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | ○ white | 500 | 9019010000 |
| H0.5/16D | 0.50 | 20 | 16.0 | 10.0 | 1.0 | 2.6 | 0.15 | 0.25 | 12.0 | ○ white | 500 | 9019020000 |
| H0.75/12T | 0.75 | 18 | 12.0 | 6.0 | 1.2 | 2.8 | 0.15 | 0.25 | 8.0 | ● light blue | 500 | 9021030000 |
| H0.75/14 | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ● light blue | 500 | 9021040000 |
| H0.75/16T | 0.75 | 18 | 16.0 | 10.0 | 1.2 | 2.8 | 0.15 | 0.25 | 12.0 | ● light blue | 500 | 9021050000 |
| H0.75/18T | 0.75 | 18 | 18.0 | 12.0 | 1.2 | 2.8 | 0.15 | 0.25 | 14.0 | ● light blue | 500 | 9021060000 |
| H1.0/12D | 1.00 | 17 | 12.0 | 6.0 | 1.4 | 3.0 | 0.15 | 0.25 | 8.0 | ● red | 500 | 9019070000 |
| H1.0/14D | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 10.0 | ● red | 500 | 9019080000 |
| H1.0/16D | 1.00 | 17 | 16.0 | 10.0 | 1.4 | 3.0 | 0.15 | 0.25 | 12.0 | ● red | 500 | 9019100000 |
| H1.0/18D | 1.00 | 17 | 18.0 | 12.0 | 1.4 | 3.0 | 0.15 | 0.25 | 15.0 | ● red | 500 | 9019110000 |
| H1.5/14D | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.5 | 0.15 | 0.25 | 10.0 | ● black | 500 | 9019120000 |
| H1.5/16D | 1.50 | 16 | 16.0 | 10.0 | 1.7 | 3.5 | 0.15 | 0.25 | 12.0 | ● black | 500 | 9019130000 |
| H1.5/18D | 1.50 | 16 | 18.0 | 12.0 | 1.7 | 3.5 | 0.15 | 0.25 | 15.0 | ● black | 500 | 9019140000 |
| H1.5/24D | 1.50 | 16 | 24.0 | 18.0 | 1.7 | 3.5 | 0.15 | 0.25 | 20.0 | ● black | 500 | 9019150000 |
| H2.5/15T | 2.50 | 14 | 15.0 | 8.0 | 2.2 | 4.2 | 0.15 | 0.25 | 10.0 | ● grey | 500 | 9021070000 |
| H2.5/19T | 2.50 | 14 | 19.0 | 12.0 | 2.2 | 4.2 | 0.15 | 0.25 | 14.0 | ● grey | 500 | 9021080000 |
| H2.5/25T | 2.50 | 14 | 25.0 | 18.0 | 2.2 | 4.2 | 0.15 | 0.25 | 20.0 | ● grey | 500 | 9021090000 |
| H4.0/18T | 4.00 | 12 | 18.0 | 10.0 | 2.8 | 4.8 | 0.2 | 0.3 | 12.0 | ● orange | 500 | 9021100000 |
| H4.0/20T | 4.00 | 12 | 20.0 | 12.0 | 2.8 | 4.8 | 0.2 | 0.3 | 14.0 | ● orange | 500 | 9021110000 |
| H4.0/26T | 4.00 | 12 | 26.0 | 18.0 | 2.8 | 4.8 | 0.2 | 0.3 | 20.0 | ● orange | 100 | 9021120000 |
| H6.0/20T | 6.00 | 10 | 20.0 | 12.0 | 3.5 | 6.3 | 0.2 | 0.3 | 14.0 | ● green | 100 | 9021130000 |
| H6.0/26T | 6.00 | 10 | 26.0 | 18.0 | 3.5 | 6.3 | 0.2 | 0.3 | 20.0 | ● green | 100 | 9021140000 |
| H10.0/22T | 10.00 | 7 | 22.0 | 12.0 | 4.5 | 7.6 | 0.2 | 0.4 | 15.0 | ● brown | 100 | 9021150000 |
| H10.0/28T | 10.00 | 7 | 28.0 | 18.0 | 4.5 | 7.6 | 0.2 | 0.4 | 21.0 | ● brown | 100 | 9021160000 |
| H16.0/22T | 16.00 | 6 | 22.0 | 12.0 | 5.8 | 8.8 | 0.2 | 0.4 | 15.0 | ○ white | 100 | 9021170000 |
| H16.0/28T | 16.00 | 6 | 28.0 | 18.0 | 5.8 | 8.8 | 0.2 | 0.4 | 21.0 | ○ white | 100 | 9021180000 |
| H25.0/30T | 25.00 | 3 | 30.0 | 16.0 | 7.3 | 11.2 | 0.2 | 0.4 | 18.0 | ● black | 50 | 9021190000 |
| H25.0/36T | 25.00 | 3 | 36.0 | 22.0 | 7.3 | 11.2 | 0.2 | 0.4 | 24.0 | ● black | 50 | 9021200000 |

J

other colour code

in multipack bag



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-----------|-------------------|-----|------|------|-----|-----|------|------|------------------|--------------|------|------------|
| H0.14/10T | 0.14 | 26 | 10.0 | 6.0 | 0.6 | 1.5 | 0.15 | 0.25 | 8.0 | ● brown | 500 | 9028250000 |
| H0.25/10T | 0.25 | 24 | 10.0 | 6.0 | 0.8 | 1.8 | 0.15 | 0.25 | 8.0 | ● yellow | 500 | 9021210000 |
| H0.25/12T | 0.25 | 24 | 12.0 | 8.0 | 0.8 | 1.8 | 0.15 | 0.25 | 10.0 | ● yellow | 500 | 9021220000 |
| H0.5/14D | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | ○ white | 500 | 9019400000 |
| H0.75/14T | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ● light blue | 500 | 9021230000 |
| H1.0/14D | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 10.0 | ● red | 500 | 9019420000 |
| H1.5/14D | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.5 | 0.15 | 0.25 | 10.0 | ● black | 500 | 9019430000 |
| H1.5/24D | 1.50 | 16 | 24.0 | 18.0 | 1.7 | 3.5 | 0.15 | 0.25 | 20.0 | ● black | 500 | 9004140000 |
| H2.5/15T | 2.50 | 14 | 15.0 | 8.0 | 2.2 | 4.2 | 0.15 | 0.25 | 10.0 | ● grey | 500 | 9021240000 |
| H4.0/18T | 4.00 | 12 | 18.0 | 10.0 | 2.8 | 4.8 | 0.2 | 0.3 | 12.0 | ● orange | 250 | 9021250000 |


other colour code

Strip of wire end ferrules



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-----------|-------------------|-----|------|-----|-----|-----|------|------|------------------|--------------|------|------------|
| H0.5/14D | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | ○ white | 500 | 9004280000 |
| H0.75/14T | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ● light blue | 500 | 9004310000 |
| H1.0/14D | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 10.0 | ● red | 500 | 9004330000 |
| H1.5/14D | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.2 | 0.15 | 0.25 | 10.0 | ● black | 500 | 9004350000 |
| H2.5/14T | 2.50 | 14 | 14.0 | 8.0 | 2.2 | 4.0 | 0.15 | 0.25 | 11.0 | ● grey | 500 | 9004370000 |



- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 0.5 to 2.5 mm² (AWG 20-14)
 Tin-plated copper
 Dimensional tolerances to DIN 46228 part 4

other colour code


Reel of wire end ferrules



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-----------|-------------------|-----|------|-----|-----|-----|------|------|------------------|--------------|------|------------|
| H0.5/14D | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.6 | 0.15 | 0.25 | 10.0 | ○ white | 5000 | 9005860000 |
| H0.75/14T | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ● light blue | 5000 | 9005900000 |
| H1.0/14D | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.0 | 0.15 | 0.25 | 11.0 | ● red | 5000 | 9005880000 |
| H1.5/14D | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.2 | 0.15 | 0.25 | 10.0 | ● black | 5000 | 9005890000 |
| H2.5/14T | 2.50 | 14 | 14.0 | 8.0 | 2.2 | 4.0 | 0.15 | 0.25 | 11.0 | ● grey | 3000 | 9005910000 |

Twin-wire end ferrules with plastic collar



- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 2 No. 0.5 to 2 No. 16 mm² (2 No. AWG 20 to 2 No. AWG 6)
Tin-plated copper
Dimensional tolerances to DIN 46228 part 4

Weidmüller colour code

packed loose



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | S1 | S2 | A | B | Stripping length | Colour | Qty. | Order No. |
|-----------|-------------------|-----|------|------|-----|------|-----|------|-----|------------------|----------|------|------------|
| H0.5/14 | 0.50 | 20 | 14.0 | 8.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 11.0 | ● orange | 500 | 9037200000 |
| H0.5/16 | 0.50 | 20 | 16.0 | 10.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 13.0 | ● orange | 500 | 9037210000 |
| H0.5/18 | 0.50 | 20 | 18.0 | 12.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 15.0 | ● orange | 500 | 9037220000 |
| H0.75/14 | 0.75 | 18 | 14.0 | 8.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 11.0 | ○ white | 500 | 9037230000 |
| H0.75/16 | 0.75 | 18 | 16.0 | 10.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 13.0 | ○ white | 500 | 9037240000 |
| H0.75/19S | 0.75 | 18 | 19.0 | 12.0 | 1.4 | 0.15 | 0.3 | 5.5 | 3.0 | 21.0 | ○ white | 500 | 9202820000 |
| H0.75/24 | 0.75 | 18 | 24.0 | 18.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 21.0 | ○ white | 500 | 9037250000 |
| H1.0/15 | 1.00 | 17 | 15.0 | 8.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 12.0 | ● yellow | 500 | 9037260000 |
| H1.0/15S | 1.00 | 17 | 16.0 | 8.0 | 2.2 | 0.15 | 0.3 | 5.8 | 3.2 | 12.0 | ● yellow | 500 | 9018690000 |
| H1.0/19 | 1.00 | 17 | 19.0 | 12.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 16.0 | ● yellow | 500 | 9037270000 |
| H1.0/25 | 1.00 | 17 | 25.0 | 18.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 22.0 | ● yellow | 500 | 9037280000 |
| H1.5/16 | 1.50 | 16 | 16.0 | 8.2 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 11.0 | ● red | 500 | 9037290000 |
| H1.5/20 | 1.50 | 16 | 20.0 | 12.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 15.0 | ● red | 500 | 9037300000 |
| H1.5/26 | 1.50 | 16 | 26.0 | 18.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 21.0 | ● red | 100 | 9037310000 |
| H2.5/19D | 2.50 | 14 | 19.0 | 10.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 13.0 | ● blue | 500 | 9037500000 |
| H2.5/21D | 2.50 | 14 | 21.0 | 12.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 15.0 | ● blue | 100 | 9037510000 |
| H2.5/27D | 2.50 | 14 | 27.0 | 18.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 21.0 | ● blue | 100 | 9037520000 |
| H4.0/22D | 4.00 | 12 | 22.0 | 12.0 | 3.5 | 0.2 | 0.5 | 9.0 | 5.2 | 15.0 | ● grey | 100 | 9037530000 |
| H4.0/28D | 4.00 | 12 | 28.0 | 18.0 | 3.5 | 0.2 | 0.5 | 9.0 | 5.2 | 21.0 | ● grey | 100 | 9037540000 |
| H6.0/23 | 6.00 | 10 | 23.0 | 12.0 | 4.5 | 0.2 | 0.5 | 11.4 | 6.2 | 20.0 | ● black | 100 | 9037320000 |
| H6.0/29 | 6.00 | 10 | 29.0 | 18.0 | 4.5 | 0.2 | 0.5 | 11.4 | 6.2 | 24.0 | ● black | 100 | 9037330000 |
| H10.0/24S | 10.00 | 7 | 24.0 | 12.0 | 6.5 | 0.2 | 0.5 | 13.4 | 7.6 | 17.0 | ● ivory | 100 | 9018860000 |
| H10.0/24 | 10.00 | 7 | 24.0 | 12.0 | 5.8 | 0.2 | 0.5 | 13.4 | 7.6 | 17.0 | ● ivory | 100 | 9037340000 |
| H10.0/30 | 10.00 | 7 | 30.0 | 18.0 | 5.8 | 0.2 | 0.5 | 13.4 | 7.6 | 23.0 | ● ivory | 100 | 9037350000 |
| H10.0/30S | 10.00 | 7 | 30.0 | 18.0 | 6.5 | 0.2 | 0.5 | 13.4 | 7.6 | 23.0 | ● ivory | 100 | 9018870000 |
| H16.0/29 | 16.00 | 6 | 29.0 | 16.0 | 8.3 | 0.3 | 0.6 | 17.2 | 9.5 | 20.0 | ● green | 50 | 9037360000 |
| H16.0/38 | 16.00 | 6 | 38.0 | 25.0 | 8.3 | 0.3 | 0.6 | 17.2 | 9.5 | 29.0 | ● green | 50 | 9037370000 |


Weidmüller colour code

in multipack bag



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | S1 | S2 | A | B | Stripping length | Colour | Qty. | Order No. |
|----------|-------------------|-----|------|------|-----|------|-----|------|-----|------------------|----------|------|------------|
| H0.5/14 | 0.50 | 20 | 14.0 | 8.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 11.0 | ● orange | 500 | 9004440000 |
| H0.75/14 | 0.75 | 18 | 14.0 | 8.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 11.0 | ○ white | 500 | 9018510000 |
| H0.75/16 | 0.75 | 18 | 16.0 | 10.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 13.0 | ○ white | 500 | 9004900000 |
| H1.0/15 | 1.00 | 17 | 15.0 | 8.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 12.0 | ● yellow | 500 | 9018530000 |
| H1.0/15S | 1.00 | 17 | 16.0 | 8.0 | 2.2 | 0.15 | 0.3 | 5.8 | 3.2 | 12.0 | ● yellow | 500 | 9018650000 |
| H1.0/19 | 1.00 | 17 | 19.0 | 12.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 16.0 | ● yellow | 500 | 9004910000 |
| H1.5/16 | 1.50 | 16 | 16.0 | 8.2 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 11.0 | ● red | 500 | 9004410000 |
| H1.5/20 | 1.50 | 16 | 20.0 | 12.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 15.0 | ● red | 500 | 9004920000 |
| H2.5/19D | 2.50 | 14 | 19.0 | 10.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 13.0 | ● blue | 250 | 9004430000 |
| H2.5/21D | 2.50 | 14 | 21.0 | 12.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 15.0 | ● blue | 250 | 9004740000 |
| H4.0/22D | 4.00 | 12 | 22.0 | 12.0 | 3.5 | 0.2 | 0.5 | 9.0 | 5.2 | 15.0 | ● grey | 100 | 9004730000 |
| H6.0/23 | 6.00 | 10 | 23.0 | 12.0 | 4.5 | 0.2 | 0.5 | 11.4 | 6.2 | 20.0 | ● black | 100 | 9004930000 |
| H10.0/24 | 10.00 | 7 | 24.0 | 12.0 | 5.8 | 0.2 | 0.5 | 13.4 | 7.6 | 17.0 | ● ivory | 100 | 9004940000 |



- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 2 No. 0.5 to 2 No. 16 mm² (2 No. AWG 20 to 2 No. AWG 6)
 Tin-plated copper
 Dimensional tolerances to DIN 46228 part 4

DIN colour code

packed loose



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | S1 | S2 | A | B | Stripping length | Colour | Qty. | Order No. |
|------------|-------------------|-----|------|------|-----|------|-----|------|-----|------------------|----------|------|------------|
| H0.5/14D | 0.50 | 20 | 14.0 | 8.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 11.0 | ○ white | 500 | 9037380000 |
| H0.5/16D | 0.50 | 20 | 16.0 | 10.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 13.0 | ○ white | 500 | 9037390000 |
| H0.5/18D | 0.50 | 20 | 18.0 | 12.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 15.0 | ○ white | 500 | 9037400000 |
| H0.75/14D | 0.75 | 18 | 14.0 | 8.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 11.0 | ● grey | 500 | 9037410000 |
| H0.75/16D | 0.75 | 18 | 16.0 | 10.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 13.0 | ● grey | 500 | 9037420000 |
| H0.75/19DS | 0.75 | 18 | 19.0 | 12.0 | 1.4 | 0.15 | 0.3 | 5.5 | 3.0 | 21.0 | ● grey | 500 | 9202830000 |
| H0.75/24D | 0.75 | 18 | 24.0 | 18.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 21.0 | ● grey | 500 | 9037430000 |
| H1.0/15D | 1.00 | 17 | 15.0 | 8.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 12.0 | ● red | 500 | 9037440000 |
| H1.0/19D | 1.00 | 17 | 19.0 | 12.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 16.0 | ● red | 500 | 9037450000 |
| H1.0/25D | 1.00 | 17 | 25.0 | 18.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 22.0 | ● red | 500 | 9037460000 |
| H1.5/16D | 1.50 | 16 | 16.0 | 8.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 11.0 | ● black | 500 | 9037470000 |
| H1.5/20D | 1.50 | 16 | 20.0 | 12.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 15.0 | ● black | 500 | 9037480000 |
| H1.5/26D | 1.50 | 16 | 26.0 | 18.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 21.0 | ● black | 100 | 9037490000 |
| H2.5/19D | 2.50 | 14 | 19.0 | 10.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 13.0 | ● blue | 500 | 9037500000 |
| H2.5/21D | 2.50 | 14 | 21.0 | 12.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 15.0 | ● blue | 100 | 9037510000 |
| H2.5/27D | 2.50 | 14 | 27.0 | 18.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 21.0 | ● blue | 100 | 9037520000 |
| H4.0/22D | 4.00 | 12 | 22.0 | 12.0 | 3.5 | 0.2 | 0.5 | 9.0 | 5.2 | 15.0 | ● grey | 100 | 9037530000 |
| H4.0/28D | 4.00 | 12 | 28.0 | 18.0 | 3.5 | 0.2 | 0.5 | 9.0 | 5.2 | 21.0 | ● grey | 100 | 9037540000 |
| H6.0/23D | 6.00 | 10 | 23.0 | 12.0 | 4.5 | 0.2 | 0.5 | 11.4 | 6.2 | 20.0 | ● yellow | 100 | 9037550000 |
| H6.0/29D | 6.00 | 10 | 29.0 | 18.0 | 4.5 | 0.2 | 0.5 | 11.4 | 6.2 | 24.0 | ● yellow | 100 | 9037560000 |
| H10.0/24DS | 10.00 | 7 | 24.0 | 12.0 | 6.5 | 0.2 | 0.5 | 13.4 | 7.6 | 17.0 | ● red | 100 | 9018880000 |
| H10.0/24D | 10.00 | 7 | 24.0 | 12.0 | 5.8 | 0.2 | 0.5 | 13.4 | 7.6 | 17.0 | ● red | 100 | 9037570000 |
| H10.0/30D | 10.00 | 7 | 30.0 | 18.0 | 5.8 | 0.2 | 0.5 | 13.4 | 7.6 | 23.0 | ● red | 100 | 9037580000 |
| H10.0/30DS | 10.00 | 7 | 30.0 | 18.0 | 6.5 | 0.2 | 0.5 | 13.4 | 7.6 | 23.0 | ● red | 100 | 9018890000 |
| H16.0/29D | 16.00 | 6 | 29.0 | 16.0 | 8.3 | 0.3 | 0.6 | 17.2 | 9.5 | 20.0 | ● blue | 50 | 9037590000 |
| H16.0/38D | 16.00 | 6 | 38.0 | 25.0 | 8.3 | 0.3 | 0.6 | 17.2 | 9.5 | 29.0 | ● blue | 50 | 9037600000 |

DIN colour code


in multipack bag



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | S1 | S2 | A | B | Stripping length | Colour | Qty. | Order No. |
|-----------|-------------------|-----|------|------|-----|------|-----|------|-----|------------------|----------|------|------------|
| H0.5/14D | 0.50 | 20 | 14.0 | 8.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 11.0 | ○ white | 500 | 9004780000 |
| H0.75/14D | 0.75 | 18 | 14.0 | 8.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 11.0 | ● grey | 500 | 9018520000 |
| H0.75/16D | 0.75 | 18 | 16.0 | 10.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 13.0 | ● grey | 500 | 9004770000 |
| H1.0/15D | 1.00 | 17 | 16.0 | 8.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 12.0 | ● red | 500 | 9018540000 |
| H1.0/19D | 1.00 | 17 | 19.0 | 12.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 16.0 | ● red | 500 | 9004760000 |
| H1.5/16D | 1.50 | 16 | 16.0 | 8.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 11.0 | ● black | 500 | 9004420000 |
| H1.5/20D | 1.50 | 16 | 20.0 | 12.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 15.0 | ● black | 500 | 9004750000 |
| H2.5/19D | 2.50 | 14 | 19.0 | 10.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 13.0 | ● blue | 250 | 9004430000 |
| H2.5/21D | 2.50 | 14 | 21.0 | 12.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 15.0 | ● blue | 250 | 9004740000 |
| H4.0/22D | 4.00 | 12 | 22.0 | 12.0 | 3.5 | 0.2 | 0.5 | 9.0 | 5.2 | 15.0 | ● grey | 100 | 9004730000 |
| H6.0/23D | 6.00 | 10 | 23.0 | 12.0 | 4.5 | 0.2 | 0.5 | 11.4 | 6.2 | 20.0 | ● yellow | 100 | 9004720000 |
| H10.0/26D | 10.00 | 7 | 24.0 | 12.0 | 5.8 | 0.2 | 0.5 | 13.4 | 7.6 | 17.0 | ● red | 100 | 9004710000 |

Twin-wire end ferrules with plastic collar



- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 2 No. 0.5 to 2 No. 16 mm² (2 No. AWG 20 to 2 No. AWG 6)
Tin-plated copper
Dimensional tolerances to DIN 46228 part 4

other colour code

packed loose



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | S1 | S2 | A | B | Stripping length | Colour | Qty. | Order No. |
|------------|-------------------|-----|------|------|-----|------|-----|------|-----|------------------|--------------|------|------------|
| H0.5/14 | 0.50 | 20 | 14.0 | 8.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 11.0 | ● orange | 500 | 9037200000 |
| H0.5/16 | 0.50 | 20 | 16.0 | 10.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 13.0 | ● orange | 500 | 9037210000 |
| H0.5/18 | 0.50 | 20 | 18.0 | 12.0 | 1.4 | 0.15 | 0.3 | 5.0 | 3.0 | 15.0 | ● orange | 500 | 9037220000 |
| H0.75/14T | 0.75 | 18 | 14.0 | 8.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 11.0 | ● light blue | 500 | 9037610000 |
| H0.75/16T | 0.75 | 18 | 16.0 | 10.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 13.0 | ● light blue | 500 | 9037620000 |
| H0.75/19TS | 0.75 | 18 | 19.0 | 12.0 | 1.4 | 0.15 | 0.3 | 5.5 | 3.0 | 21.0 | ● light blue | 500 | 9202840000 |
| H0.75/24T | 0.75 | 18 | 24.0 | 18.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 21.0 | ● light blue | 500 | 9037630000 |
| H1.0/15D | 1.00 | 17 | 15.0 | 8.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 12.0 | ● red | 500 | 9037440000 |
| H1.0/19D | 1.00 | 17 | 19.0 | 12.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 16.0 | ● red | 500 | 9037450000 |
| H1.0/25D | 1.00 | 17 | 25.0 | 18.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 22.0 | ● red | 500 | 9037460000 |
| H1.5/16D | 1.50 | 16 | 16.0 | 8.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 11.0 | ● black | 500 | 9037470000 |
| H1.5/20D | 1.50 | 16 | 20.0 | 12.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 15.0 | ● black | 500 | 9037480000 |
| H1.5/26D | 1.50 | 16 | 26.0 | 18.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 21.0 | ● black | 100 | 9037490000 |
| H2.5/19T | 2.50 | 14 | 19.0 | 10.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 13.0 | ● grey | 500 | 9037640000 |
| H2.5/21T | 2.50 | 14 | 21.0 | 12.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 15.0 | ● grey | 100 | 9037650000 |
| H2.5/27T | 2.50 | 14 | 27.0 | 18.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 21.0 | ● grey | 100 | 9037660000 |
| H4.0/22T | 4.00 | 12 | 22.0 | 12.0 | 3.5 | 0.2 | 0.5 | 9.0 | 5.2 | 15.0 | ● orange | 100 | 9037670000 |
| H4.0/28T | 4.00 | 12 | 28.0 | 18.0 | 3.5 | 0.2 | 0.5 | 9.0 | 5.2 | 21.0 | ● orange | 100 | 9037680000 |
| H6.0/23T | 6.00 | 10 | 23.0 | 12.0 | 4.5 | 0.2 | 0.5 | 11.4 | 6.2 | 20.0 | ● green | 100 | 9037690000 |
| H6.0/29T | 6.00 | 10 | 29.0 | 18.0 | 4.5 | 0.2 | 0.5 | 11.4 | 6.2 | 24.0 | ● green | 100 | 9037700000 |
| H10.0/24T | 10.00 | 7 | 24.0 | 12.0 | 5.8 | 0.2 | 0.5 | 13.4 | 7.6 | 17.0 | ● brown | 100 | 9037710000 |
| H10.0/30T | 10.00 | 7 | 30.0 | 18.0 | 5.8 | 0.2 | 0.5 | 13.4 | 7.6 | 23.0 | ● brown | 100 | 9037720000 |
| H16.0/29T | 16.00 | 6 | 29.0 | 16.0 | 8.3 | 0.3 | 0.6 | 17.2 | 9.5 | 20.0 | ○ white | 50 | 9037730000 |
| H16.0/38T | 16.00 | 6 | 38.0 | 25.0 | 8.3 | 0.3 | 0.6 | 17.2 | 9.5 | 29.0 | ○ white | 50 | 9037740000 |


other colour code

in multipack bag



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | S1 | S2 | A | B | Stripping length | Colour | Qty. | Order No. |
|-----------|-------------------|-----|------|------|-----|------|-----|------|-----|------------------|--------------|------|------------|
| H0.75/16T | 0.75 | 18 | 16.0 | 10.0 | 1.7 | 0.15 | 0.3 | 5.5 | 3.0 | 13.0 | ● light blue | 500 | 9005140000 |
| H1.0/15D | 1.00 | 17 | 16.0 | 8.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 12.0 | ● red | 500 | 9018540000 |
| H1.0/19D | 1.00 | 17 | 19.0 | 12.0 | 2.0 | 0.15 | 0.3 | 5.8 | 3.2 | 16.0 | ● red | 500 | 9004760000 |
| H1.5/16D | 1.50 | 16 | 16.0 | 8.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 11.0 | ● black | 500 | 9004420000 |
| H1.5/20D | 1.50 | 16 | 20.0 | 12.0 | 2.2 | 0.15 | 0.3 | 6.5 | 3.6 | 15.0 | ● black | 500 | 9004750000 |
| H2.5/19T | 2.50 | 14 | 19.0 | 10.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 13.0 | ● grey | 250 | 9018580000 |
| H2.5/21 | 2.50 | 14 | 21.0 | 12.0 | 2.8 | 0.15 | 0.4 | 8.0 | 4.5 | 15.0 | ● grey | 250 | 9005150000 |
| H4.0/22T | 4.00 | 12 | 22.0 | 12.0 | 3.5 | 0.2 | 0.5 | 9.0 | 5.2 | 15.0 | ● orange | 100 | 9018590000 |
| H6.0/23T | 6.00 | 10 | 23.0 | 12.0 | 4.5 | 0.2 | 0.5 | 11.4 | 6.2 | 20.0 | ● green | 100 | 9005160000 |
| H10.0/26T | 10.00 | 7 | 24.0 | 12.0 | 5.8 | 0.2 | 0.5 | 13.4 | 7.6 | 17.0 | ● brown | 100 | 9005170000 |




- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 1.5 to 16 mm² (AWG 16-6)
 Tin-plated copper
 Dimensional tolerances to DIN 46228 part 4

Weidmüller colour code

packed loose




Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|--------------|-------------------|-----|------|-----|-----|-----|------|-----|------------------|---------|------|------------|
| H1.5/17.5 XS | 1.50 | 16 | 17.5 | 8.0 | 1.8 | 6.8 | 0.15 | 0.3 | 20.0 | ● black | 100 | 9202870000 |
| H2.5/17.5 XS | 2.50 | 14 | 17.5 | 8.0 | 2.3 | 7.6 | 0.15 | 0.3 | 20.0 | ● blue | 100 | 9202880000 |

Weidmüller colour code


in multipack bag



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-------------|-------------------|-----|------|------|-----|------|------|-----|------------------|----------|------|------------|
| H1.5/17.5X | 1.50 | 16 | 17.5 | 8.0 | 1.8 | 6.8 | 0.15 | 0.3 | 13.0 | ● black | 100 | 9006590000 |
| H1.5/19.5X | 1.50 | 16 | 19.5 | 10.0 | 1.8 | 6.8 | 0.15 | 0.3 | 15.0 | ● black | 100 | 9006630000 |
| H2.5/17.5X | 2.50 | 14 | 17.5 | 8.0 | 2.3 | 7.6 | 0.15 | 0.3 | 14.0 | ● blue | 100 | 9006670000 |
| H2.5/21.5X | 2.50 | 14 | 21.5 | 12.0 | 2.3 | 7.6 | 0.15 | 0.3 | 17.0 | ● blue | 100 | 9006710000 |
| H4.0/19.5X | 4.00 | 12 | 19.5 | 10.0 | 2.9 | 7.8 | 0.2 | 0.3 | 14.0 | ● grey | 100 | 9006750000 |
| H6.0/23.0X | 6.00 | 10 | 23.0 | 12.0 | 3.6 | 8.1 | 0.2 | 0.3 | 17.0 | ● yellow | 100 | 9006790000 |
| H10.0/24.0X | 10.00 | 7 | 24.0 | 12.0 | 4.6 | 9.6 | 0.2 | 0.3 | 17.0 | ● red | 100 | 9006830000 |
| H16.0/25.5X | 16.00 | 6 | 25.5 | 12.0 | 6.0 | 11.9 | 0.2 | 0.3 | 26.0 | ● blue | 100 | 9006870000 |

Wire end ferrules with plastic collar, special sizes




- Polypropylene conical cable entry
- Heat-resistant up to 105 °C
- Cable entry made from a not readily flammable material on request

For conductors from 0.5 to 2.5 mm² (AWG 20-14)
Tin-plated copper
Dimensional tolerances to DIN 46228 part 4

Weidmüller colour code

packed loose



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|------------|-------------------|-----|------|------|-----|-----|------|------|------------------|--------------|------|------------|
| H0.34/11S | 0.34 | 22 | 11.0 | 6.0 | 0.8 | 2.6 | 0.15 | 0.40 | 6.0 | ● turquoise | 500 | 9204090000 |
| H0.5/14S | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.9 | 0.15 | 0.25 | 10.0 | ● orange | 500 | 9004560000 |
| H0.5/14DS | 0.50 | 20 | 14.0 | 8.0 | 1.0 | 2.9 | 0.15 | 0.25 | 10.0 | ○ white | 500 | 9004590000 |
| H0.5/16DS | 0.50 | 20 | 16.0 | 10.0 | 1.0 | 2.9 | 0.15 | 0.25 | 12.0 | ○ white | 500 | 9202910000 |
| H0.5/16S | 0.50 | 20 | 16.0 | 10.0 | 1.0 | 2.9 | 0.15 | 0.25 | 12.0 | ● orange | 500 | 9202900000 |
| H0.75/14S | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 3.4 | 0.15 | 0.25 | 10.0 | ○ white | 500 | 9025960000 |
| H0.75/14DS | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 3.4 | 0.15 | 0.25 | 10.0 | ○ white | 500 | 9028580000 |
| H0.75/14TS | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 3.4 | 0.15 | 0.25 | 10.0 | ● light blue | 500 | 9018550000 |
| H0.75/15S | 0.75 | 18 | 15.0 | 9.0 | 1.2 | 2.8 | 0.15 | 0.25 | 10.0 | ○ white | 500 | 9204240000 |
| H1.0/14S | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.5 | 0.15 | 0.25 | 10.0 | ● yellow | 500 | 9025970000 |
| H1.0/14DS | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.5 | 0.15 | 0.25 | 10.0 | ● red | 500 | 9018560000 |
| H1.5/12S | 1.50 | 16 | 12.0 | 6.0 | 1.7 | 3.5 | 0.15 | 0.25 | 8.0 | ● red | 500 | 9025690000 |
| H1.5/14S | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.9 | 0.15 | 0.25 | 10.0 | ● red | 500 | 9025980000 |
| H1.5/14DS | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.9 | 0.15 | 0.25 | 10.0 | ● black | 500 | 9025240000 |
| H2.5/12DS | 2.50 | 14 | 12.0 | 6.0 | 2.2 | 4.2 | 0.15 | 0.25 | 8.0 | ● blue | 500 | 9028490000 |
| H2.5/12TS | 2.50 | 14 | 12.0 | 6.0 | 2.2 | 4.2 | 0.15 | 0.25 | 8.0 | ● grey | 500 | 9036200000 |
| H2.5/14S | 2.50 | 14 | 14.0 | 8.0 | 2.2 | 4.0 | 0.15 | 0.25 | 10.0 | ● blue | 500 | 1333100000 |
| H2.5/14TS | 2.50 | 14 | 14.0 | 8.0 | 2.2 | 4.0 | 0.15 | 0.25 | 10.0 | ● grey | 500 | 9426770000 |
| H2.5/16DS | 2.50 | 14 | 16.0 | 10.0 | 2.2 | 4.2 | 0.15 | 0.25 | 13.0 | ● blue | 500 | 9036220000 |
| H4.0/20D | 4.00 | 12 | 20.0 | 12.0 | 2.8 | 4.7 | 0.20 | 0.50 | 15.0 | ● grey | 500 | 9203630000 |
| H10.0/22 | 10.00 | 7 | 22.0 | 12.0 | 4.5 | 7.1 | 0.20 | 0.60 | 15.0 | ● ivory | 100 | 9203620000 |


Weidmüller colour code

in multipack bag



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-----------|-------------------|-----|------|-----|-----|-----|------|------|------------------|----------|------|------------|
| H0.75/14S | 0.75 | 18 | 14.0 | 8.0 | 1.2 | 3.4 | 0.15 | 0.25 | 10.0 | ○ white | 500 | 9025700000 |
| H1.0/14S | 1.00 | 17 | 14.0 | 8.0 | 1.4 | 3.5 | 0.15 | 0.25 | 10.0 | ● yellow | 500 | 9025710000 |
| H1.5/14DS | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.9 | 0.15 | 0.25 | 10.0 | ● black | 500 | 9028360000 |
| H1.5/14S | 1.50 | 16 | 14.0 | 8.0 | 1.7 | 3.9 | 0.15 | 0.25 | 10.0 | ● red | 500 | 9025720000 |



For conductors 0.25-185 mm² (AWG 24-350MCM)
Material: tin-plated copper
Dimensional tolerances to DIN 46228 part 1

without plastic collar

packed loose



Ordering data

| Type | ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-----------|-------------------|---------|------|----|------|------|----|----|------------------|--------|------|------------|
| H0.25/5 | 0.25 | 24 | 5.0 | | 0.8 | 1.6 | | | 5.0 | | 1000 | 9018910000 |
| H0.5/10 | 0.50 | 20 | 10.0 | | 1.0 | 2.1 | | | 10.0 | | 1000 | 9004050000 |
| H0.5/6 | 0.50 | 20 | 6.0 | | 1.0 | 2.1 | | | 6.0 | | 1000 | 0282600000 |
| H0.75/10 | 0.75 | 18 | 10.0 | | 1.2 | 2.3 | | | 10.0 | | 1000 | 0542500000 |
| H0.75/6 | 0.75 | 18 | 6.0 | | 1.2 | 2.3 | | | 6.0 | | 1000 | 0282700000 |
| H1.0/10 | 1.00 | 17 | 10.0 | | 1.4 | 2.5 | | | 10.0 | | 1000 | 0282800000 |
| H1.0/6 | 1.00 | 17 | 6.0 | | 1.4 | 2.5 | | | 6.0 | | 1000 | 0372600000 |
| H1.5/7 | 1.50 | 16 | 7.0 | | 1.7 | 2.8 | | | 7.0 | | 1000 | 0372700000 |
| H1.5/10 | 1.50 | 16 | 10.0 | | 1.7 | 2.8 | | | 10.0 | | 1000 | 0186500000 |
| H1.5/12 | 1.50 | 16 | 12.0 | | 1.7 | 2.8 | | | 12.0 | | 1000 | 9004060000 |
| H1.5/18 | 1.50 | 16 | 18.0 | | 1.7 | 2.8 | | | 18.0 | | 1000 | 9004070000 |
| H2.5/7 | 2.50 | 14 | 7.0 | | 2.2 | 3.4 | | | 7.0 | | 1000 | 0373000000 |
| H2.5/10 | 2.50 | 14 | 10.0 | | 2.2 | 3.4 | | | 10.0 | | 1000 | 9004080000 |
| H2.5/12 | 2.50 | 14 | 12.0 | | 2.2 | 3.4 | | | 12.0 | | 1000 | 0186100000 |
| H2.5/18 | 2.50 | 14 | 18.0 | | 2.2 | 3.4 | | | 18.0 | | 1000 | 9004090000 |
| H4.0/9 | 4.00 | 12 | 9.0 | | 2.8 | 4.0 | | | 9.0 | | 500 | 0373100000 |
| H4.0/15 | 4.00 | 12 | 15.0 | | 2.8 | 4.0 | | | 15.0 | | 500 | 9004100000 |
| H4.0/12 | 4.00 | 12 | 12.0 | | 2.8 | 4.0 | | | 12.0 | | 1000 | 0244100000 |
| H4.0/18 | 4.00 | 12 | 18.0 | | 2.8 | 4.0 | | | 18.0 | | 500 | 9004110000 |
| H6.0/10 | 6.00 | 10 | 10.0 | | 3.5 | 4.7 | | | 10.0 | | 500 | 9004120000 |
| H6.0/12 | 6.00 | 10 | 12.0 | | 3.5 | 4.7 | | | 12.0 | | 500 | 0191900000 |
| H6.0/15 | 6.00 | 10 | 15.0 | | 3.5 | 4.7 | | | 15.0 | | 500 | 0124700000 |
| H6.0/18 | 6.00 | 10 | 18.0 | | 3.5 | 4.7 | | | 18.0 | | 500 | 9004130000 |
| H10.0/12 | 10.00 | 7 | 12.0 | | 4.5 | 5.8 | | | 12.0 | | 500 | 0282900000 |
| H10.0/15 | 10.00 | 7 | 15.0 | | 4.5 | 5.8 | | | 15.0 | | 500 | 0124800000 |
| H10.0/18 | 10.00 | 7 | 18.0 | | 4.5 | 5.8 | | | 18.0 | | 500 | 0379300000 |
| H16.0/12 | 16.00 | 6 | 12.0 | | 5.8 | 7.5 | | | 12.0 | | 500 | 0492500000 |
| H16.0/15 | 16.00 | 6 | 15.0 | | 5.8 | 7.5 | | | 15.0 | | 500 | 0124300000 |
| H16.0/18 | 16.00 | 6 | 18.0 | | 5.8 | 7.5 | | | 18.0 | | 100 | 0375200000 |
| H16.0/25 | 16.00 | 6 | 25.0 | | 5.8 | 7.5 | | | 25.0 | | 100 | 9004150000 |
| H16.0/32 | 16.00 | 6 | 32.0 | | 5.8 | 7.5 | | | 32.0 | | 100 | 9004160000 |
| H25.0/15 | 25.00 | 3 | 15.0 | | 7.3 | 9.5 | | | 15.0 | | 250 | 0124400000 |
| H25.0/18 | 25.00 | 3 | 18.0 | | 7.3 | 9.5 | | | 18.0 | | 100 | 0375300000 |
| H25.0/25 | 25.00 | 3 | 25.0 | | 7.3 | 9.5 | | | 25.0 | | 250 | 9004170000 |
| H25.0/32 | 25.00 | 3 | 32.0 | | 7.3 | 9.5 | | | 32.0 | | 100 | 9004180000 |
| H35.0/18 | 35.00 | 2 | 18.0 | | 8.3 | 11.0 | | | 18.0 | | 100 | 0368900000 |
| H35.0/25 | 35.00 | 2 | 25.0 | | 8.3 | 11.0 | | | 25.0 | | 100 | 9004190000 |
| H35.0/30 | 35.00 | 2 | 30.0 | | 8.3 | 11.0 | | | 30.0 | | 100 | 9451000000 |
| H35.0/32 | 35.00 | 2 | 32.0 | | 8.3 | 11.0 | | | 32.0 | | 100 | 9004200000 |
| H50.0/18 | 50.00 | 1 | 18.0 | | 10.3 | 13.0 | | | 18.0 | | 100 | 9004210000 |
| H50.0/22 | 50.00 | 1 | 22.0 | | 10.3 | 13.0 | | | 25.0 | | 100 | 9025880000 |
| H50.0/32 | 50.00 | 1 | 32.0 | | 10.3 | 13.0 | | | 32.0 | | 100 | 9004220000 |
| H70.0/25 | 70.00 | 2/0 | 25.0 | | 12.5 | 15.0 | | | 25.0 | | 50 | 9004230000 |
| H70.0/32 | 70.00 | 2/0 | 32.0 | | 12.5 | 15.0 | | | 32.0 | | 50 | 9004240000 |
| H95.0/25 | 95.00 | 3/0 | 25.0 | | 14.5 | 17.0 | | | 25.0 | | 50 | 9004250000 |
| H95.0/32 | 95.00 | 3/0 | 32.0 | | 14.5 | 17.0 | | | 32.0 | | 50 | 9004260000 |
| H120.0/32 | 120.00 | 4/0 | 32.0 | | 17.2 | 19.0 | | | 32.0 | | 25 | 9036240000 |
| H150.0/32 | 150.00 | 300 MCM | 32.0 | | 19.5 | 21.0 | | | 32.0 | | 25 | 9036250000 |
| H185.0/32 | 185.00 | 350 MCM | 32.0 | | 21.2 | 23.5 | | | 32.0 | | 25 | 9036260000 |

Assortment of wire end ferrules

0.14...0.75mm²



Box filled with wire end ferrules with plastic collar:

- in Weidmüller colour code

0.5...2.5mm²



Box filled with wire end ferrules with plastic collar:

- in Weidmüller colour code
- DIN colour code

ZH 0.5...2.5 mm²



Box filled with twin wire-end ferrules with plastic collars:

- in Weidmüller colour code

Assembly

| Type | Piece |
|----------|-------|
| H0.75/14 | 30 |
| H0.5/14 | 30 |
| H0.14/10 | 30 |
| H0.25/10 | 30 |
| H0.34/10 | 30 |

Assembly

| Type | Piece |
|----------|-------|
| H1.0/14 | 100 |
| H1.5/14 | 100 |
| H0.5/14 | 50 |
| H0.75/14 | 100 |
| H2.5/14 | 50 |

Assembly

| Type | Piece |
|-----------|-------|
| H0.5/15 | 50 |
| H0.75/15 | 50 |
| H1.0/15 | 50 |
| H1.5/16 | 50 |
| H2.5/18.5 | 25 |

Technical data

| | |
|-------------------|---------------|
| Diameter / Height | 92 mm / 25 mm |
| Weight | 93 g |

Technical data

| | |
|-------------------|---------------|
| Diameter / Height | 92 mm / 40 mm |
| Weight | 93 g |

Technical data

| | |
|-------------------|---------------|
| Diameter / Height | 92 mm / 40 mm |
| Weight | 93 g |

Ordering data

| Colour code | Type | Order No. |
|-------------|--------------------|------------|
| Weidmüller | H-BOX 0,14-0,75QMM | 9025410000 |

Ordering data

| Colour code | Type | Order No. |
|-------------|----------------------|------------|
| Weidmüller | H-BOX 0,5-2,5QMM | 9025900000 |
| DIN | H-BOX 0,5-2,5QMM DIN | 9025430000 |

Ordering data


| Colour code | Type | Order No. |
|-------------|-------------------|------------|
| Weidmüller | ZH-BOX 0,5-2,5QMM | 9025390000 |

4.0...16mm²

Box filled with wire-end ferrules with plastic collars:

- in Weidmüller colour code
- DIN colour code

Empty box

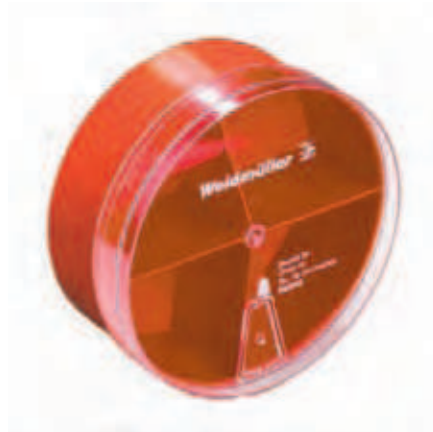

Empty box for wire-end ferrules with

- 4 dividers
- 5 dividers
- 5 coloured inserts

Assembly

| Type | Piece |
|----------|-------|
| H6.0/20 | 20 |
| H10.0/22 | 20 |
| H16.0/24 | 10 |
| H4.0/17 | 50 |

Technical data

| | |
|-------------------|---------------|
| Diameter / Height | 92 mm / 40 mm |
| Weight | 93 g |

Ordering data

| Colour code | Type | Order No. |
|-------------|-----------------------|-------------------|
| Weidmüller | H-BOX 4,0-16,0QMM | 9025920000 |
| DIN | H-BOX 4,0-16,0QMM DIN | 9025400000 |

Technical data

| | |
|-------------------|---------------|
| Diameter / Height | 92 mm / 40 mm |
| Weight | |

| Colour code | Type | Order No. |
|-------------|---------------------|-------------------|
| Empty box | EMPTY BOX 4 DIVERS | 9025420000 |
| Empty box | EMPTY BOX 5 INSERTS | 9025940000 |
| Empty box | EMPTY BOX 5 DIVERS | 9025680000 |

Insulated cable connectors, PVC, with conical cable entry



Ring cable connector



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d ¹ | d | D | L | b | S1* | Qty. | Order No. |
|---------------|-------------------------------|--------|------------|----------------|------|-----|-------|-------|------|------|------------|
| LIR 1.5M3 V | 0.5 - 1.5 | ● | M 3 | 3.2 | 5.5 | 4.0 | 16.05 | 11.3 | 0.75 | 100 | 9200070000 |
| LIR 1.5M3.5 V | 0.5 - 1.5 | ● | M 3.5 | 3.7 | 5.5 | 4.0 | 16.05 | 11.3 | 0.75 | 100 | 9200080000 |
| LIR 1.5M4 V | 0.5 - 1.5 | ● | M 4 | 4.3 | 8.0 | 4.0 | 18.3 | 11.3 | 0.75 | 100 | 9200090000 |
| LIR 1.5M5 V | 0.5 - 1.5 | ● | M 5 | 5.3 | 8.0 | 4.0 | 18.3 | 11.3 | 0.75 | 100 | 9200100000 |
| LIR 1.5M6 V | 0.5 - 1.5 | ● | M 6 | 6.4 | 11.6 | 4.0 | 21.0 | 11.3 | 0.75 | 100 | 9200110000 |
| LIR 1.5M8 V | 0.5 - 1.5 | ● | M 8 | 8.4 | 11.6 | 4.0 | 21.0 | 11.3 | 0.75 | 100 | 9200120000 |
| LIR 2.5M3 V | 1.5 - 2.5 | ● | M 3 | 3.2 | 6.4 | 4.5 | 15.6 | 11.3 | 0.8 | 100 | 9200150000 |
| LIR 2.5M3.5 V | 1.5 - 2.5 | ● | M 3.5 | 3.7 | 6.4 | 4.5 | 15.6 | 11.3 | 0.8 | 100 | 9200160000 |
| LIR 2.5M4 V | 1.5 - 2.5 | ● | M 4 | 4.4 | 8.5 | 4.5 | 19.05 | 11.3 | 0.8 | 100 | 9200170000 |
| LIR 2.5M5 V | 1.5 - 2.5 | ● | M 5 | 5.3 | 8.5 | 4.5 | 19.05 | 11.3 | 0.8 | 100 | 9200180000 |
| LIR 2.5M6 V | 1.5 - 2.5 | ● | M 6 | 6.4 | 12.0 | 4.5 | 22.3 | 11.3 | 0.8 | 100 | 9200190000 |
| LIR 2.5M8 V | 1.5 - 2.5 | ● | M 8 | 8.4 | 12.0 | 4.5 | 22.3 | 11.3 | 0.8 | 100 | 9200200000 |
| LIR 2.5M10 V | 1.5 - 2.5 | ● | M 10 | 10.5 | 14.0 | 4.5 | 22.3 | 11.3 | 0.8 | 100 | 9200210000 |
| LIR 6.0M4 V | 4 - 6 | ● | M 4 | 4.3 | 9.5 | 6.4 | 22.4 | 14.15 | 1 | 100 | 9200230000 |
| LIR 6M5 V | 4 - 6 | ● | M 5 | 5.3 | 9.5 | 6.4 | 22.4 | 14.15 | 1 | 100 | 9200240000 |
| LIR 6M6 V | 4 - 6 | ● | M 6 | 6.4 | 12.0 | 6.4 | 24.65 | 14.15 | 1 | 100 | 9200250000 |
| LIR 6M8 V | 4 - 6 | ● | M 8 | 8.4 | 15.0 | 6.4 | 27.65 | 14.15 | 1 | 100 | 9200260000 |
| LIR 6.0M10 V | 4 - 6 | ● | M 10 | 10.5 | 15.0 | 6.4 | 27.65 | 14.15 | 1 | 100 | 9200270000 |

Fork-type cable connector




Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d ¹ | d | D | L | b | S1* | Qty. | Order No. |
|---------------|-------------------------------|--------|------------|----------------|------|-----|-------|-------|------|------|------------|
| LIS 1.5M3 V | 0.5 - 1.5 | ● | M 3 | 3.2 | 5.7 | 4.0 | 17.8 | 11.3 | 0.75 | 100 | 9200290000 |
| LIS 1.5M3.5 V | 0.5 - 1.5 | ● | M 3.5 | 3.7 | 6.4 | 4.0 | 17.8 | 11.3 | 0.75 | 100 | 9200300000 |
| LIS 1.5M4 V | 0.5 - 1.5 | ● | M 4 | 4.3 | 7.2 | 4.0 | 17.8 | 11.3 | 0.75 | 100 | 9200310000 |
| LIS 1.5M5 V | 0.5 - 1.5 | ● | M 5 | 5.3 | 8.1 | 4.0 | 17.8 | 11.3 | 0.75 | 100 | 9200320000 |
| LIS 1.5M6 V | 0.5 - 1.5 | ● | M 6 | 6.4 | 11.0 | 4.0 | 21.3 | 11.3 | 0.75 | 100 | 9200330000 |
| LIS 2.5M3 V | 1.5 - 2.5 | ● | M 3 | 3.2 | 5.7 | 4.5 | 17.8 | 11.3 | 0.8 | 100 | 9200350000 |
| LIS 2.5M3.5 V | 1.5 - 2.5 | ● | M 3.5 | 3.7 | 6.4 | 4.5 | 17.8 | 11.3 | 0.8 | 100 | 9200360000 |
| LIS 2.5M4 V | 1.5 - 2.5 | ● | M 4 | 4.3 | 7.2 | 4.5 | 17.8 | 11.3 | 0.8 | 100 | 9200370000 |
| LIS 2.5M5 V | 1.5 - 2.5 | ● | M 5 | 5.3 | 8.1 | 4.5 | 17.8 | 11.3 | 0.8 | 100 | 9200380000 |
| LIS 2.5M6 V | 1.5 - 2.5 | ● | M 6 | 6.4 | 11.0 | 4.5 | 21.3 | 11.3 | 0.8 | 100 | 9200390000 |
| LIS 6.0M4 V | 4 - 6 | ● | M 4 | 4.3 | 9.0 | 6.4 | 21.35 | 14.15 | 1 | 100 | 9200410000 |
| LIS 6.0M5 V | 4 - 6 | ● | M 5 | 5.3 | 9.0 | 6.4 | 21.35 | 14.15 | 1 | 100 | 9200420000 |
| LIS 6.0M6 V | 4 - 6 | ● | M 6 | 6.4 | 12.0 | 6.4 | 25.15 | 14.15 | 1 | 100 | 9200430000 |
| LIS 6.0M8 V | 4 - 6 | ● | M 8 | 8.4 | 14 | 6.5 | 34 | 13.15 | 1 | 100 | 9200440000 |
| LIS 6.0M10 V | 4 - 6 | ● | M 10 | 10.5 | 18 | 6.5 | 34.7 | 13.15 | 1 | 100 | 9200450000 |

S1* = Connection density

Pin-type cable connector

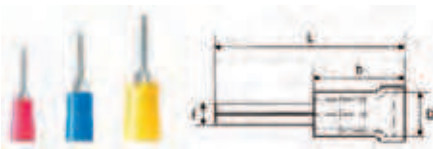


Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | D | L | b | f | Qty. | Order No. |
|--------------|-------------------------------|--------|------------|-----|-------|------|-----|------|------------|
| LIP 1.5R12 V | 0.5 - 1.5 | ● | 12.0 | 4 | 23.3 | 11.3 | 1.9 | 100 | 9200460000 |
| LIP 2.5R12 V | 1.5 - 2.5 | ● | 12.0 | 4.5 | 23.3 | 11.3 | 1.9 | 100 | 9200470000 |
| LIP 6.0R14 V | 4 - 6 | ● | 14.0 | 6.4 | 28.15 | 14.5 | 2.7 | 100 | 9200480000 |

Hook-type cable connector

to ESI 50-18 part 2



Ordering data

| Type | Cross-section mm ² | Colour | L1 | L2 | B | Qty. | Order No. |
|---------|-------------------------------|--------|------|-------|-----|------|------------|
| HB 1-17 | 0.25 - 1.5 | ● | 27.2 | 16.75 | 4.6 | 100 | 9036290000 |
| HB 1-13 | 1.0 - 2.5 | ● | 27.2 | 16.75 | 3.0 | 100 | 9036300000 |



Butt connector



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | D | L | Qty. | Order No. |
|---------------|-------------------------------|--------|------------|-----|----|------|------------|
| LIB 1.5B25 VF | 0.5 - 1.5 | ● | 24.5 | 3.8 | 26 | 100 | 9200490000 |
| LIB 2.5B25 VF | 1.5 - 2.5 | ● | 24.5 | 4.3 | 26 | 100 | 9200500000 |
| LIB 6.0B26 VF | 4 - 6 | ● | 26.0 | 6 | 26 | 100 | 9200510000 |

Flat blade receptacles

with copper sleeve



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d2* | d3* | D | L | b | w | Qty. | Order No. |
|---------------|-------------------------------|--------|--------------|-----|-----|-----|------|------|-----|------|------------|
| LIF 1.5F288 R | 0.5 - 1.5 | ● | 2.8 x 0.8 mm | 2.8 | 0.8 | 4.0 | 18.7 | 10.0 | 3.8 | 100 | 9200520000 |
| LIF 1.5F488 R | 0.5 - 1.5 | ● | 4.8 x 0.8 mm | 4.8 | 0.8 | 4.0 | 19.2 | 10.0 | 5.7 | 100 | 9200530000 |
| LIF 1.5F638 R | 0.5 - 1.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 4.0 | 20.8 | 10.0 | 7.4 | 100 | 9200540000 |
| LIF 2.5F488 R | 1.5 - 2.5 | ● | 4.8 x 0.8 mm | 4.8 | 0.8 | 5.0 | 19.2 | 10.0 | 5.7 | 100 | 9200550000 |
| LIF 2.5F638 R | 1.5 - 2.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 5.0 | 20.8 | 10.0 | 7.4 | 100 | 9200560000 |
| LIF 6.0F638 R | 4 - 6 | ● | 6.3 x 0.8 mm | 4.8 | 0.8 | 6.8 | 23.8 | 13.0 | 7.4 | 100 | 9200570000 |

Flat blade connector

with copper sleeve



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d2* | d3* | D | L | b | w | Qty. | Order No. |
|---------------|-------------------------------|--------|--------------|-----|-----|-----|------|------|-----|------|------------|
| LIF 1.5M638 R | 0.5 - 1.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 4.0 | 20.8 | 10.0 | 6.3 | 100 | 9200580000 |
| LIF 2.5M638 R | 1.5 - 2.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 5.0 | 20.8 | 10.0 | 6.3 | 100 | 9200590000 |
| LIF 6.0M638 R | 4 - 6 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 6.8 | 23.8 | 13.0 | 6.3 | 100 | 9200600000 |

Flat blade receptacles, piggy-back

with copper sleeve



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d2* | d3* | D | L | b | w | Qty. | Order No. |
|---------------|-------------------------------|--------|--------------|-----|-----|-----|------|------|-----|------|------------|
| LIF 1.5T638 R | 0.5 - 1.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 4.0 | 20.8 | 10.0 | 7.4 | 100 | 9200610000 |
| LIF 2.5T638 R | 1.5 - 2.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 5.8 | 20.8 | 10.0 | 7.4 | 100 | 9200620000 |
| LIF 6.0T638 R | 4 - 6 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 6.8 | 23.8 | 13.0 | 7.4 | 100 | 9200630000 |

Flat blade receptacles, full insulation

with copper sleeve



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d2* | d3* | D | L | b | w | Qty. | Order No. |
|----------------|-------------------------------|--------|--------------|-----|-----|-----|------|------|-----|------|------------|
| LIF 1.5F638 RF | 0.5 - 1.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 4.0 | 22.0 | 10.5 | 7.4 | 100 | 9200640000 |
| LIF 2.5F638 RF | 1.5 - 2.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 5.0 | 22.0 | 10.5 | 7.4 | 100 | 9200650000 |
| LIF 6.0F638 RF | 4 - 6 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 6.8 | 24.5 | 13.0 | 5.7 | 100 | 9200660000 |

d2* = Plug-in width
d3* = Plug-in density

Insulated cable connectors, PVC, with conical cable entry



Round plug

with copper sleeve



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d | D | L | b | Qty. | Order No. |
|-------------|-------------------------------|--------|------------|-----|-----|------|------|------|------------|
| LID 1.5M4 R | 0,5 - 1,5 | ● | ∅ 4 mm | 4.0 | 4.0 | 20,8 | 10,0 | 100 | 9200670000 |
| LID 2.5M5 R | 1,5 - 2,5 | ● | ∅ 5 mm | 5.0 | 5.0 | 20,8 | 10,0 | 100 | 9200680000 |
| LID 6.0M5 R | 4 - 6 | ● | ∅ 5 mm | 5.0 | 5.8 | 23,8 | 13,0 | 100 | 9200690000 |

Sockets for round plugs

with copper sleeve



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d | D | L | b | Qty. | Order No. |
|--------------|-------------------------------|--------|------------|-----|-----|------|------|------|------------|
| LID 1.5F4 RF | 0,5 - 1,5 | ● | ∅ 4 mm | 4.0 | 4.0 | 23,0 | 10,5 | 100 | 9200700000 |
| LID 2.5F5 RF | 1,5 - 2,5 | ● | ∅ 5 mm | 5.0 | 5.0 | 23,0 | 11,5 | 100 | 9200710000 |
| LID 6.0F5 RF | 4 - 6 | ● | ∅ 5 mm | 5.0 | 5.0 | 24,0 | 13,8 | 100 | 9200720000 |