



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**RS  
RS 8AIO I-M-DP SD Z**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

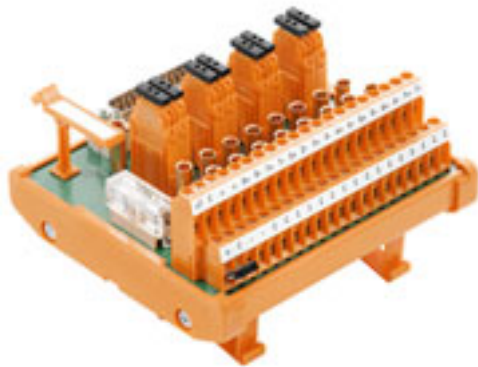

The analogue interfaces are equipped with SubD connectors. Thus they offer sufficient shielding for analogue signal transmission. They are also equipped with very useful isolators and test sockets for measuring voltage or current.

**General ordering data**

Type	RS 8AIO I-M-DP SD Z
Order No.	<a href="#">9449110000</a>
Version	Interface, RS, Isolator, 2-wire, Tension clamp connection
GTIN (EAN)	4032248253487
Qty.	1 pc(s).

**RS  
RS 8AIO I-M-DP SD Z**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Length	114 mm	Width	109 mm
Height	81 mm	Net weight	316.097 g

**Temperatures**

Operating temperature	-20...+50°C	Storage temperature	-40...+60 °C
-----------------------	-------------	---------------------	--------------

**General data**

LED status display per channel	No	Disconnection per channel	Yes
Voltage point of measurement	Yes	Current-measuring testpoint	Yes
Type of test point	Diameter: 4 mm	LED status of the supply voltage	No
Power supply fuse	3.15 A	Common pole polarity	Positive or negative can be selected using jumper

**Connection data**

Connection to PLC	25-pole D-SUB male connector	Connection on control side	SUB-D plug, in compliance with IEC 807-2 / DIN 41652
Number of poles (control side)	25-pole plug	Connection (field side)	LMNZF 5.08mm
Connection supply	LMNZF 5.08mm	Wiring system	2-wire
Protective earth connection	Shielding in SUB-D plug-in connector		

**Ratings data**

Operating voltage	≤ 25 V AC / 50 V DC	Max. current for common pole	3.15 A
Max. current per channel	0.5 A		

**Insulation coordination (EN50178)**

According to	DIN EN 50178	Rated insulation voltage	< 50 V AC
Surge voltage category	III	Pollution severity level	2
Pulse voltage test (1,2/50µs)	0.8 kV	Insulation test voltage	0.35 kVAC

**Connection field**

Type of connection	Tension clamp connection	Clamping range, min.	0.13 mm <sup>2</sup>
Clamping range, max.	2.5 mm <sup>2</sup>	Solid, min. H05(07) V-U	0.5 mm <sup>2</sup>
Solid, max. H05(07) V-U	1.5 mm <sup>2</sup>	Flexible, min. H05(07) V-K	0.5 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>	Flexible with sleeve, max.	1.5 mm <sup>2</sup>
Min. wire cross-section, AWG [field]	AWG 26	Max. wire cross-section, AWG [field]	AWG 14
Stripping length	7 mm		

**Supply connection**

Type of connection	Tension clamp connection	Clamping range, min.	0.13 mm <sup>2</sup>
Clamping range, max.	2.5 mm <sup>2</sup>	Solid, min. H05(07) V-U	0.2 mm <sup>2</sup>
Solid, max. H05(07) V-U	2.5 mm <sup>2</sup>	Flexible, min. H05(07) V-K	0.2 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>	Flexible with sleeve, max.	1.5 mm <sup>2</sup>
Flexible with sleeve, min.	0.25 mm <sup>2</sup>	Ferrule with plastic collar, max.	1.5 mm <sup>2</sup>
Wire cross-section, min. AWG	AWG 24	Wire cross-section, max. AWG	AWG 14
Stripping length	7.5 mm		

**Data sheet**

**RS  
RS 8AIO I-M-DP SD Z**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Classifications**

ETIM 3.0	EC001423	UNSPSC	30-21-18-01
eClass 5.1	27-24-22-08	eClass 6.2	27-24-22-08
eClass 7.1	27-24-22-08		

**Product information**

Descriptive text technical data      The common C may carry up to 3 A if the external jumpers are not used

**Approvals**

Approvals



ROHS      Conform

**Data sheet**

**RS  
RS 8AIO I-M-DP SD Z**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings**

