

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







3M[™] Pin Strip Header

2 mm x 2 mm Dual Insulator, Straight, Surface Mount

951 Series



- High temperature dielectric
- "No lead" reflow solder compatible
- Maximizes use of PC board space
- End stackable feature
- Mates with boardmount products
- RoHS Compliant. See the Regulatory Information Appendix (RIA) in the RoHS compliance section of www.3Mconnectors.com for compliance information (RIA E1 & C1 apply)

Date Modified: November 19, 2014

TS-2159-D Sheet 1 of 2

Physical

Insulation

Material: High Temperature Thermoplastic

Flammability: UL 94V-0 Color: Black

Contact

Material: Copper Alloy

Plating

Underplating: $1.25-2.5 \mu m [100 \mu"]$ Nickel

Wiping Area: Flash Gold

Solder Tail Area: 1–3 μm [40–118 μ"] Matte Tin

Electrical

Current Rating: 1 A

Insulation Resistance: $> 5 \times 10^8 \text{ Ohm at } 100 \text{ V}_{DC}$

Environmental


Temperature Range: -40 °C to +105 °C

Processing Temperature: max. 260°C (Profile per J-STD-020C)

Moisture Sensitivity Level: 1 (per J-STD-020C)

UL File No.: E68080

951 Series

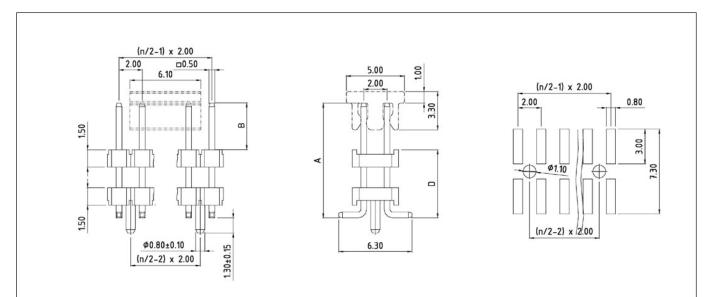


Contact Dimensions						
Coding No.	A	Mating Length	D			
13	9.9	4.0	5.9			
14	10.7	4.0	6.7			
16	11.9	4.0	7.9			
17	12.4	4.0	8.4			
20	15.4	4.0	11.4			
23	17.4	4.0	13.4			
Others on Request						

Contact Dimensions						
Coding No.	A	Mating Length	D			
13	11.8	5.9	5.9			
14	12.6	5.9	6.7			
16	13.8	5.9	7.9			
17	14.3	5.9	8.4			
20	17.3	5.9	11.4			
23	19.3	5.9	13.4			
Others on Reque	est					

n = No. of Contacts

Tolerance Unless Noted [mm]						
Nominal Size	0.5-3	3–6	6–30	30–120		
Linear Dim	+/- 0.1	+/- 0.1	+/- 0.2	+/- 0.3		
Radii	+/- 0.2	+/- 0.5	+/- 1	+/- 1		

Ordering Information

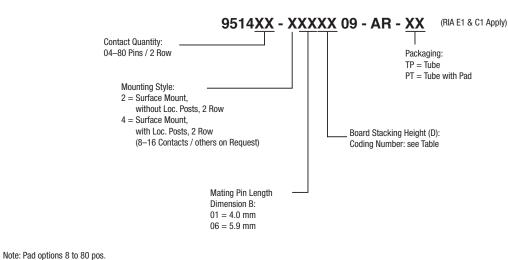

TS-2159-D Sheet 2 of 2

3M

Important Notice All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M. Warranty; Limited Remedy; Limited Liability. This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. 3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M

will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.

3M is a trademark of 3M Company.

Please recycle. Printed in USA.

© 3M 2014. All rights reserved.

RIA-2217A-E

Electronic Materials Solutions Division

6801 River Place Blvd. Austin, TX 78726-9000

www.3Mconnectors.com

1-800-225-5373

U.S.A.