



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SMD KHz Crystals 2.0 x 1.2 x 0.6 mm 9H T11 Series

Features

- Ceramic surface mount package
- Applications in mobile phone, Notebook and DSC.
- RoHS Compliant / Pb Free.




Electrical Specifications

Item / Type	9H T11
Norminal Frequency	32.768 KHz
Frequency Tolerance(at 25 °C)	± 20 ppm , or specify
Operation Temperature Range	- 40 ~ + 85 °C
Shunt Capacitance (C0)	1.3pF typical
Motional Capacitance (C1)	6.4fF typical
Insulation Resistance (IR)	500 MΩ Min.
Drive Level (DL)	1.0 μW Max.
Load Capacitance(CL)	9 pF , or 12.5 pF
Turnover Temperature (Ti)	25 °C ± 5 °C
Parabolic Coefficient (B)	$(-0.03 \pm 0.01) * 10^{-6} / ^\circ\text{C}^2$
Aging (at 25 °C)	± 5 ppm at first year
Storage Temperature Range	- 55 ~ +125 °C

Equivalent Series Resistance(ESR)

T11
 90 KΩ Max

Dimensions

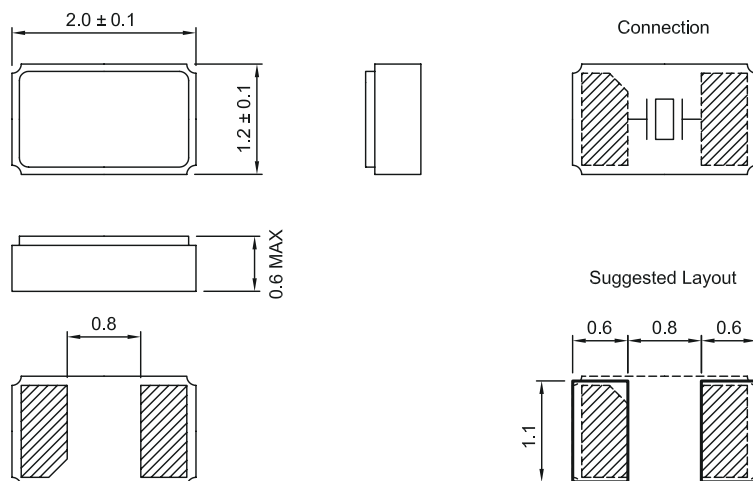

Units: mm