



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



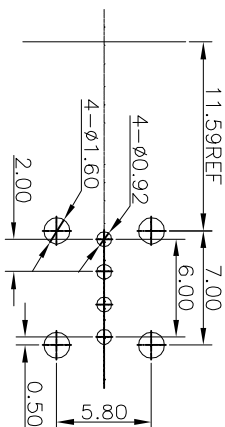

RECOMMENDED P.C.B LAYOUT  
TOLERANCE=±0.05MM

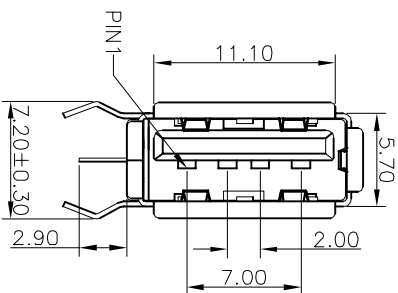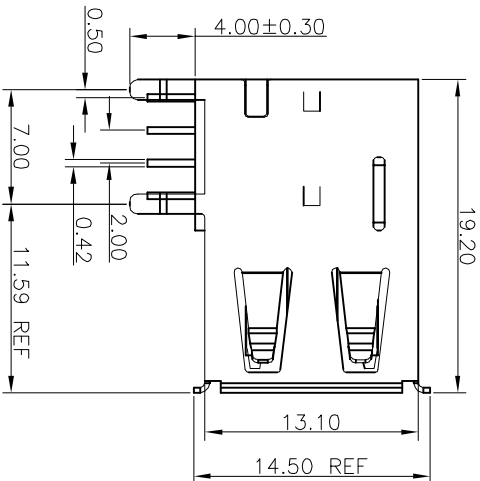

- NOTES:**
- Material:
    - Housing: PBT+30%GF UL94V-0, Color White
    - Cover: PBT +30%GF UL94V-0, Color White
    - Shell: Brass
    - Contact :Phosphor Bronze
  - FINISH:
    - Contact Area: Selective 30u"Au
    - Solder Area: Tin Plated
    - Under: Ni Plated
  - MECHANICAL:
    - Mating Force: 3.57kgf Max.
    - Unmating Force: 1.02kgf Min
    - Durability: 1500 cycles Min
  - ELECTRICAL:
    - Current Rating: 1.5A
    - Dielectric Strength: 500V AC FOR 1 MINUTE
    - Contact Resistance: 30mΩ Max
    - Insulation Resistance: 1000 MΩ Min
    - Operating temperature: -55°C TO +85°C
    - PACKAGING: Tray

**RoHS compliant**

Scale	Free												
TOLERANCE													
.X	±0.30					Drawn	07.06.2013	Winnie					
.XX	±0.20					Approved	07.06.2013	Winnie					
.XXX	±0.10												
DIM	TOL												
X. °	±5°												
Angle	TOL												
UNIT	mm												

**ASSMANN**  
WWSW/ components

Customer-No.  
ASSMANN WSW-No.  
**A-USB/2-A-E**  
Drawing-No.  
**ASS 5764 CO**  
Replace  
rev00  
SHEET

1 2 3 4 5 6 7

A B C D E F G H