

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







PWM 180-Pin Probing Board Manual

an EZ-Extender® product

Revision 1.0, September 2013

Part Number 82-000387-01

Analog Devices, Inc. One Technology Way Norwood, Mass. 02062-9106



Copyright Information

©2013 Analog Devices, Inc., ALL RIGHTS RESERVED. This document may not be reproduced in any form without prior, express written consent from Analog Devices, Inc.

Printed in the USA.

Disc la im e r

Analog Devices, Inc. reserves the right to change this product without prior notice. Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use; nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under the patent rights of Analog Devices, Inc.

Trademark and Service Mark Notice

The Analog Devices logo, EngineerZone, EZ-Extender, and EZ-KIT Lite are registered trademarks of Analog Devices, Inc.

All other brand and product names are trademarks or service marks of their respective owners.

Regulatory Compliance

The PWM 180-Pin Probing Board is designed to be used solely in a laboratory environment. The board is not intended for use as a consumer end product or as a portion of a consumer end product. The board is an open system design which does not include a shielded enclosure and therefore may cause interference to other electrical devices in close proximity. This board should not be used in or near any medical equipment or RF devices.

The PWM 180-Pin Probing Board is in the process of being certified to comply with the essential requirements of the European EMC directive 2004/108/EC and therefore carries the "CE" mark.



The probing board contains ESD (electrostatic discharge) sensitive devices. Electrostatic charges readily accumulate on the human body and equipment and can discharge without detection. Permanent damage may occur on devices subjected to high-energy discharges. Proper ESD precautions are recommended to avoid performance degradation or loss of functionality. Store unused probing boards in the protective shipping package.



C O NTENTS

PREFACE

Product Overview	vii
Purpose of This Manual	viii
Intended Audience	viii
Manual Contents	ix
What's New in This Manual	ix
Technical Support	X
Supported Products	X
Product Information	xi
Analog Devices Web Site	xi
EngineerZone	xii
Notation Conventions	xii

Contents

USING PWM 180-PIN PROBING BOARD

Package Contents	1-2
PWM 180-Pin Probing Board Installation	1-2
Expansion Interface	1-3
Reference Design Information	1-4
PWM 180-PIN PROBING BOARD HARD REFERENCE	OWARE
System Architecture	2-1
Connectors	2-2
Connector (J1)	2-3
Connector (P1)	2-3
Connector (P2–P6)	2-3
Connector (P7–P16)	2-3
PWM 180-PIN PROBING BOARD BILL O	OF MATERIALS
PWM 180-PIN PROBING BOARD SCHE	MATIC
INDEX	

PREFA C E

Thank you for purchasing the PWM 180-Pin Probing Board, Analog Devices, Inc. probing board for the ADSP-CM40x family of mixed-signal control processors.

The ADSP-CM408F mixed-signal control processor is based on the ARM® Cortex®-M4 processor core and is designed for motor control and industrial applications. The probing board is shipped with all of the necessary hardware—you can start the evaluation immediately.

Product Overview

The PWM 180-Pin Probing Board is a separately sold extender board that plugs onto the ADSP-CM403F and ADSP-CM408F EZ-KIT Lite[®] evaluation systems. The extender board aids the design and prototyping phases of processor-targeted applications.

The board extends the capabilities of the evaluation system by providing a point for probing any signal of the 180-pin asynchronous bus and PWM expansion interface connectors.

The board features:

- Two 180-pin connectors
 - Samtec QSH-090-01-F-D-A
 - Samtec QTH-090-01-F-D-A

Purpose of This Manual

- Five probing headers
 - Samtec TSW-118-07-L-D
- Ten GND headers
 - FCI 90726-402HLF

For information about the hardware components of the product, refer to PWM 180-Pin Probing Board Bill Of Materials.

Purpose of This Manual

The *PWM 180-Pin Probing Board Manual* provides instructions for installing the product hardware (board). A schematic and a bill of materials are provided for reference.

Intended Audience

The primary audience for this manual is a programmer who is familiar with an ARM Cortex-M4-based core.

The ADSP-CM40x family of mixed-signal control processors is based on the ARM Cortex-M4 processor core with floating-point unit and integrated SRAM memory, flash memory, accelerators, and peripherals.

The applicable documentation for programming the ARM Cortex-M4 processor core includes:

- Cortex-M4 Devices Generic User Guide
- CoreSight ETM-M4 Technical Reference Manual
- Cortex-M4 Technical Reference Manual

For additional information on this Analog Devices processor, see the *ADSP-CM40x Mixed-Signal Control Processor Hardware Reference*. This document describes the ARM Cortex-M4 processor core and memory architecture used on the ADSP-CM40x processor, but does not provide detailed programming information for the ARM core.

For more information about programming the ARM core, visit the ARM Information Center:

http://infocenter.arm.com/help/

Manual Contents

The manual consists of:

- Chapter 1, Using PWM 180-Pin Probing Board Describes the product functionality.
- Chapter 2, PWM 180-Pin Probing Board Hardware Reference Provides information about the board's hardware components.
- Appendix A, PWM 180-Pin Probing Board Bill Of Materials
 Lists the hardware components used to manufacture the board.
- Appendix B, PWM 180-Pin Probing Board Schematic Lists the resources for board-level debugging.

What's New in This Manual

This is the first edition (Revision 1.0) of the PWM 180-Pin Probing Board Manual.

Technical Support

You can reach Analog Devices processors and DSP technical support in the following ways:

 Post your questions in the processors and DSP support community at EngineerZone[®]:

```
http://ez.analog.com/community/dsp
```

• Submit your questions to technical support directly at: http://www.analog.com/support

E-mail your questions about processors and processor applications

```
processor.support@analog.com or
processor.china@analog.com (Greater China support)
```

- In the USA only, call 1-800-ANALOGD (1-800-262-5643)
- Contact your Analog Devices sales office or authorized distributor.
 Locate one at:

```
www.analog.com/adi-sales
```

Send questions by mail to:
 Processors and DSP Technical Support Analog Devices, Inc.
 Three Technology Way
 P.O. Box 9106
 Norwood, MA 02062-9106
 USA

Supported Products

This board supports Analog Devices ADSP-CM403F and ADSP-CM408F EZ-KIT Lites.

Product Information

Product information can be obtained from the Analog Devices Web site and the online help system.

Analog Devices Web Site

The Analog Devices Web site, www.analog.com, provides information about a broad range of products—analog integrated circuits, amplifiers, converters, and digital signal processors.

To access a complete technical library for each processor family, go to http://www.analog.com/processors/technical_library. The manuals selection opens a list of current manuals related to the product as well as a link to the previous revisions of the manuals. When locating your manual title, note a possible errata check mark next to the title that leads to the current correction report against the manual.

Also note, myAnalog.com is a free feature of the Analog Devices Web site that allows customization of a Web page to display only the latest information about products you are interested in. You can choose to receive weekly e-mail notifications containing updates to the Web pages that meet your interests, including documentation errata against all manuals. myAnalog.com provides access to books, application notes, data sheets, code examples, and more.

Visit myAnalog.com (found on the Analog Devices home page) to sign up. If you are a registered user, just log on. Your user name is your e-mail address.

Engine e rZo ne

EngineerZone is a technical support forum from Analog Devices. It allows you direct access to ADI technical support engineers. You can search FAQs and technical information to get quick answers to your embedded processing and DSP design questions.

Use EngineerZone to connect with other DSP developers who face similar design challenges. You can also use this open forum to share knowledge and collaborate with the ADI support team and your peers. Visit http://ez.analog.com to sign up.

No tation Conventions

Text conventions used in this manual are identified and described as follows.

Example	Description
File > Close	Titles in reference sections indicate the location of an item within the CCES environment's menu system (for example, the Close command appears on the File menu).
{this that}	Alternative required items in syntax descriptions appear within curly brackets and separated by vertical bars; read the example as this or that. One or the other is required.
[this that]	Optional items in syntax descriptions appear within brackets and separated by vertical bars; read the example as an optional this or that.
[this,]	Optional item lists in syntax descriptions appear within brackets delimited by commas and terminated with an ellipse; read the example as an optional comma-separated list of this.
.SECTION	Commands, directives, keywords, and feature names are in text with letter gothic font.
filename	Non-keyword placeholders appear in text with italic style format.

Example	Description
①	Note: For correct operation, A Note provides supplementary information on a related topic. In the online version of this book, the word Note appears instead of this symbol.
×	Caution: Incorrect device operation may result if Caution: Device damage may result if A Caution identifies conditions or inappropriate usage of the product that could lead to undesirable results or product damage. In the online version of this book, the word Caution appears instead of this symbol.
\Diamond	Warning: Injury to device users may result if A Warning identifies conditions or inappropriate usage of the product that could lead to conditions that are potentially hazardous for the devices users. In the online version of this book, the word Warning appears instead of this symbol.



1 USING PWM 180-PIN PROBING BOARD

This chapter provides information about using the PWM 180-Pin Probing Board.

The following topics are covered.

- Package Contents
- PWM 180-Pin Probing Board Installation
- Expansion Interface
- Reference Design Information

For detailed information on how to program the ADSP-CM40x processors, refer to the documents listed in the Preface.

For detailed information about the specific evaluation system, refer to the ADSP-CM403F EZ-KIT Lite Evaluation System Manual or the ADSP-CM408F EZ-KIT Lite Evaluation System Manual.

Package Contents

Your PWM 180-Pin Probing Board package contains the following items:

- PWM 180-Pin Probing Board
- Hardware for securing the extender board onto the EK-KIT Lite

Contact the vendor where you purchased your EZ-KIT Lite or contact Analog Devices, Inc. if any item is missing.

PWM 180-Pin Probing Board Installation

Follow these instructions to ensure correct operation of the product hardware.

- 1. Attach the extender board to the EZ-KIT Lite.
 - The P1 connector on the extender board can be connected to the corresponding 180-pin connector on the EZ-KIT Lite.
- 2. Use the provided hardware to secure the extender to the EZ-KIT Lite.

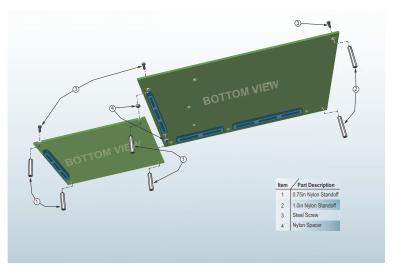


Figure 1-1. Mechanical Mating Details

Expansion Interface

The expansion interface allows a custom-designed daughter board to be tested across various hardware platforms that have the same expansion interface.

The expansion interface implemented on the ADSP-CM40x EZ-KIT Lites consists of two 180-pin connectors. The connectors contain a majority of the processor's signals. There is also a 120-pin connector for Analog signals. The PWM 180-Pin Probing Board will not mate with the 120-pin connectors.



Analog Devices does not support and is not responsible for the effects of additional circuitry.

Reference Design Information

A reference design info package is available for download on the Analog Devices Web site. The package provides information on the design, layout, fabrication, and assembly of the probing board.

The information can be found at:

http://www.analog.com/MCEI1-PWMProbingBoard

2 PWM 180-PIN PROBING BOARD HARDWARE REFERENCE

This chapter describes the hardware design of the PWM 180-Pin Probing Board.

The following topics are covered.

• System Architecture

Describes the board's configuration and explains how the board components interface with the processor.

Connectors

Shows the locations and provides part numbers for the on-board connectors. In addition, the manufacturer and part number information is provided for the mating parts.

System Architecture

The PWM 180-Pin Probing Board allows all signals to be probed. Silkscreen on the board corresponds with the pin number of the QTH-090-01-F-D-A (P1) connector. These numbers also match one-to-one with the QSH-090-01-F-D-A (Jx) connector located on the attached EZ-KIT Lite.

It is also possible to connect the PWM 180-Pin Probing Board in between the EZ-KIT Lite and an extender card with additional circuitry. To do this, connect P1 of the extender card to the EZ-KIT Lite and attach the extender card to J1 of the PWM 180-Pin Probing Board.

Connectors

This section describes connector functionality and provides information about mating connectors. The connector locations are shown in Figure 2-1.

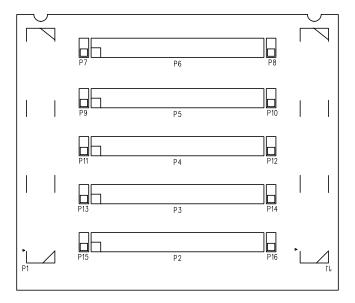


Figure 2-1. Connector Locations

Connector (J1)

Part Description	Manufacturer	Part Number		
180-pin high speed socket	SAMTEC	QSH-090-01-F-D-A		
Mating Connector				
180-pin high speed header	SAMTEC	QTH-090-01-F-D-A		

Connector (P1)

Part Description	Manufacturer	Part Number		
180-pin high speed header	SAMTEC	QTH-090-01-F-D-A		
Mating Connector				
180-pin high speed socket	SAMTEC	QSH-090-01-F-D-A		

Connector(P2-P6)

Part Description	Manufacturer	Part Number		
IDC 18x2 0.1"	SAMTEC	TSW-118-07-L-D		
Mating Connector				
0.1" female connector with wire or oscilloscope probe				

Connector(P7-P16)

Part Description	Manufacturer	Part Number		
IDC 2x1 0.1"	FCI	90726-402HLF		
	Mating Connector			
0.1" oscilloscope probe GND				

Connectors

A PWM 180-PIN PROBING BOARD BILL OF MATERIALS

The bill of materials corresponds to PWM 180-Pin Probing Board Schematic.

Ref.	Qty	Description	Reference Designator	Manufacturer	Part Number
1	10	IDC 2X1 IDC2X1	P7-P16	FCI	90726-402HLF
2	1	0.5MM 180PIN SAMTEC_ QSH-090-F-D-A	J1	SAMTEC	QSH-090-01-F-D-A
3	1	0.5MM 180PIN SAMTEC_ QTH-090-F-D-A	P1	SAMTEC	QTH-090-01-F-D-A
4	5	IDC 18X2 SAMTEC_ TSW-118-07-L-D	P2-P6	SAMTEC	TSW-118-07-L-D

