



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Data Sheet

Sound Level Meters & Calibrator Models 732A, 735, and CAL73

Sound Level Meters

Whether you are testing for OSHA compliance, quieting equipment, or monitoring the roar of a stadium crowd, B&K Precision's sound level meters can get the job done. The model 732A and 735 provide 30~130 dB capability in three convenient measurement ranges Low, Med, and Hi with an accuracy of ± 1.5 dB. The meter meets the IEC 651 Type II and includes frequency weighting A & C, and fast and slow time weighting. Two auxiliary ports provide either AC output, 1 Vrms full scale, or DC output, 10 mV/dB. With the model 732A and 735, B&K Precision can meet all your sound testing needs.

Common Features (732A & 735)

- RS-232 Interface
- Bargraph
- MAX/MIN function
- Auto Ranging (30 ~ 130 dB)
- Resolution 0.1 dB
- Level Range Display
- AC/DC Signal Output
- Auto Power Off
- Backlit LCD


Features (735 only)

- Windows Software Included
- Clock Display
- 32,000 Records Data Logger



732A

735

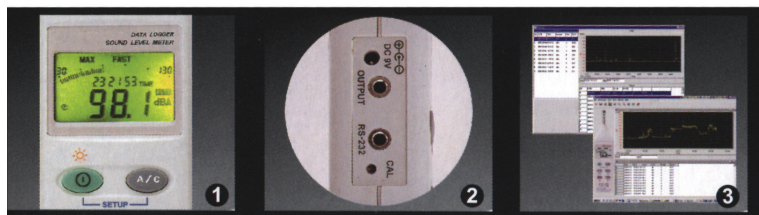

Back light function

RS-232 Interface

RS-232 Software for
Windows® 95/98 2000/XP
included with model 735

Standard Acoustic Calibrator

The CAL73 sound level calibrator is used to calibrate sound level meters and other sound measurement equipment. You can calibrate 1 inch diameter microphones directly and 1/2 inch microphones using 1/2 inch adapter supplied with the calibrator.

Features

- Conforms to IEC 60942 (2003) Class 2, ANSI S1.40-1984
- 94 dB and 114 dB Sound calibrator at 1 kHz
- Accurate and simple to use
- Fits 1 inch and 1/2 inch microphones

