



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832




Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



USB 3.0 A/M 9Pin
INS:Blue(PT 300C)

USB 3.0 B/M 9Pin
INS:Blue(PT 300C)

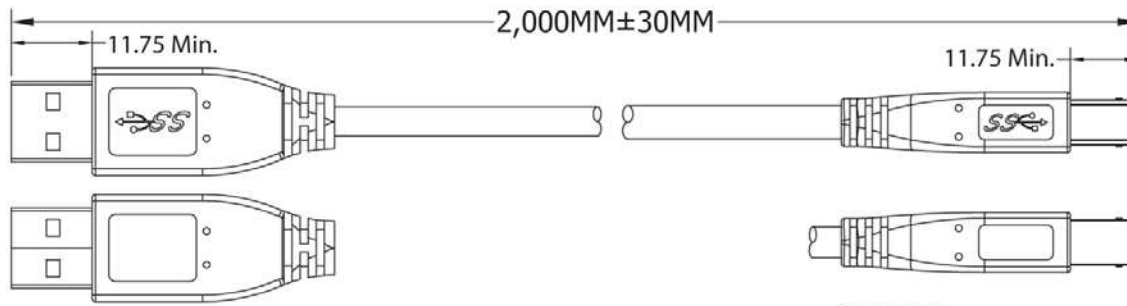

P1

P2

Material:

- Cable: UL-27725 [#28(7/0.1 27 T.C)*1P INS:Foam-PE+D.W (7.0127 T.C.)+AL/MY+Hot-melt-Mylar]*2C+#28(7/0.127 T.C)*1P INS:Polyolefin + #28(7/0.127 T.C)*2C INS:Polyolefin +AL/MY +B.D(85%)
- PVC Jacket
- OD: 5.2±0.15MM
- Color: Black

- P1 Connector: USB 3.0 Type Male 9 Pin
- Contact: 30µ"
- Shell: Ni-Plated
- P2 Connector: USB 3.0 Type Male 9 Pin
- Contact: 30µ"
- Shell: Ni-Plated
- Hood: Molded Type, PVC 45P (Black)

Electrical:

- 100% Open short & mis wire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 10Ω Min.
- Hi-Pot 300V DC

Unit: MM

PIN OUT		
P1	1	RED
	2	WHITE
	3	GREEN
	4	BLACK
	5	BLUE
	6	YELLOW
	7	D.W
	8	PURPLE
	9	ORANGE
SHELL		B.D
	P2	1 PWR
		2 UTP_D-
		3 UTP_D+
		4 GND_PWRt
		5 SDP1-
		6 SDP1+
		7 SDP1_Drain & SDP2_Drain
		8 SDP2-
		9 SDP2+
		SHELL



Scale	1:1						Name	Item No.
TOLERANCE						Drawn	01.04.12	AK672/3-2
X.X	±0.40					Approved		Title USB 3.0 Cable, A Male <=> B Male, 9 Pin, Insulation Blue, 2 Meters
X.XX	±0.25							Drawing No.
X.XXX	±0.15							rev00
Angle	±3°							Replace
								Sheet
		Modification	Date	Name				

