



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# AP851 50 Watts TO-220 High Power Resistors

A high power TO-220 style resistor package designed for high frequency emitter circuits in switching power supplies. Also used in voltage regulation and low energy pulse loading.



- 50 Watts at 25°C case temperature on heat sink
- Single screw mounting to heat sink
- Moulded case for protection and easy to mount
- Non-inductive design
- Electrically isolated case
- RoHS Compliant

## Characteristics


|                               |   |
|-------------------------------|---|
| Power rating:                 | 2.25 Watts in free air  |
| Operating voltage:            | 420V max  |
| Dielectric strength:          | 1800Vac   |
| Insulation resistance:        | 10GΩ min  |
| Temperature coefficient:      | As specified, referenced to 25°C, ΔR taken at +105°C  |
| Short time overload:          | ΔR ±0.3%, 2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds |
| Load life:                    | ΔR ±1.0%, 2000 hours at rated power   |
| Damp heat with load:          | ΔR ±0.5%, 40 ±2°C, 90 - 95% R.H max working voltage for 1000 hours with 1.5 hours "ON" and 0.5 hours "OFF"                    |
| Solderability:                | 90% min coverage, 245 ±5°C for 3 seconds  |
| Thermal shock:                | ΔR ±0.3%, -65°C - 150°C, 100 cycles   |
| Terminal strength:            | ΔR ±0.2%, 2.4 N   |
| Vibration and high frequency: | ΔR ±0.2%, 20g peak  |

## Electrical Specifications

| Resistance Value Range | Available Tolerance & Pref. Value Ranges | Available TCR                                |
|------------------------|--|--|
| R1 - 1R                | J (±5%) K (±10%)                         | Not specified                                |
| 1R02 - 3R              | F (±1%) , J (±5%) , K (±10%)             | ±300ppm/°C                                   |
| 3R01 - 10R             |  | ±100ppm/°C (std.)<br>±200ppm/°C              |
| 10R2 - 10K             | D (±0.5%) F (±1%) J (±5%) K (±10%)       | ±50ppm/°C<br>±100ppm/°C (std.)<br>±200ppm/°C |

Preferred value ranges:  
F (±1%) - E96 , J (±5%) - E24, K (±10%) - E12


## Derating Curve

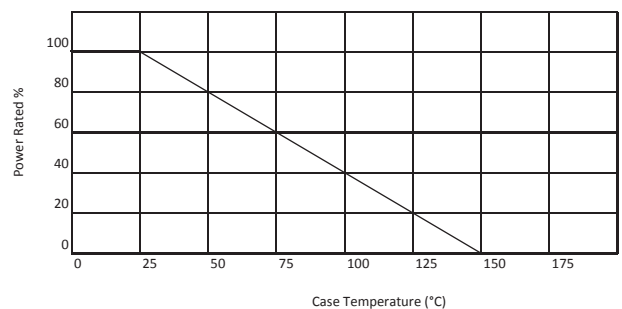

For more information and ordering, please consult  
[www.arcolresistors.com](http://www.arcolresistors.com)

# AP851 50 Watts TO-220 High Power Resistors

## Dimensions (mm)

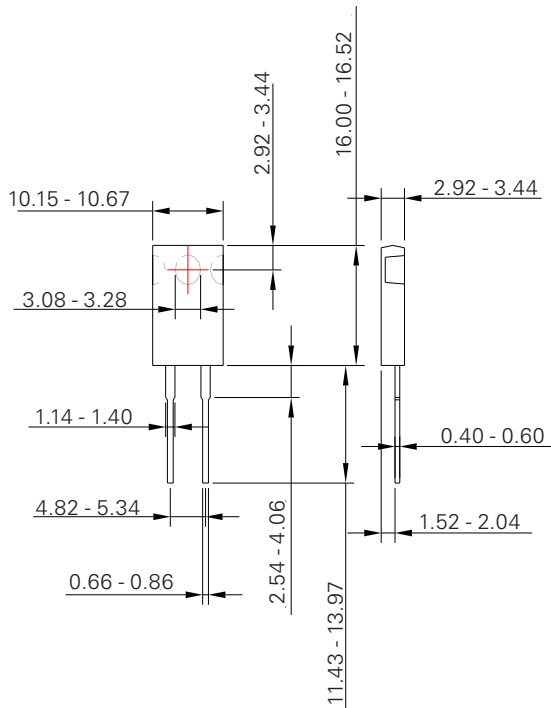

## Standard part numbers

|           |           |            |            |
|-----------|-----------|------------|------------|
| AP8511RF  | AP8514R7J | AP85125RJ  | AP851330RJ |
| AP8511RJ  | AP85110RF | AP85147RJ  | AP851470RJ |
| AP8512RJ  | AP85110RJ | AP851100RF | AP8511KJ   |
| AP8513R3J | AP85115RJ | AP851100RJ | AP85110KJ  |
| AP8513R9J | AP85125RF | AP851220RJ |            |

## Ordering Information

**A P 8 5 1 1 0 0 R F N**

| Series | Resistance | Tolerance | TCR              |
|--------|------------|-----------|------------------|
|        |            | F = 1%    | N = 50ppm        |
|        |            | J = 5%    | L = 200ppm       |
|        |            | K = 10%   | Blank = standard |

ARCOL UK Limited,  
Threemilestone Ind. Estate,  
Truro, Cornwall, TR4 9LG, UK.  
T +44 (0) 1872 277431  
F +44 (0) 1872 222002  
E sales@arcolresistors.com

[www.arcolresistors.com](http://www.arcolresistors.com)

The information contained herein does not form part of a contract and is subject to change without notice. ARCOL operate a policy of continual product development, therefore, specifications may change.

It is the responsibility of the customer to ensure that the component selected from our range is suitable for the intended application. If in doubt please ask ARCOL.