



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




**Space-saving  
SSOP 1 Form A type  
with built-in resistor  
40V load voltage**

**PhotoMOS®  
RF SSOP C×R10  
Voltage-sensitive (AQY221FO2V)**



mm inch



**RoHS compliant**

### FEATURES

#### 1. Built-in input resistor means less man-hours when mounting

The voltage-sensitive type, which eliminates the need to mount an external input resistor, is now available in a small package. Man-hours spent mounting external input resistors are cut and board designing is simplified.

#### 2. Save space on PC board


Since the small package size remains the same while including a built-in input resistor, space on the PC board is saved. This makes it easier to incorporate space savings when designing miniature devices.

#### 3. Both low on-resistance (R type) and low capacitance (C type) available at excellent electrical characteristics of C×R10

- R type: On resistance 0.75Ω (typ.)  
Output resistance 12.5pF (typ.)
- C type: On resistance 9.5Ω (typ.)  
Output capacitance 1pF (typ.)

### TYPICAL APPLICATIONS

- 1. Measuring and testing equipment**  
Semiconductor testing equipment, Probe cards, Datalogger, Board tester and other testing equipment.
- 2. Telecommunication and broadcasting equipment**
- 3. Medical equipment**

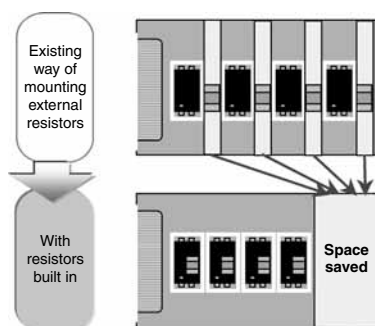

<Artistic impression of PC board space savings due to built-in resistor>

### TYPES

	Type	Output rating*1		Package	Part No.*2		Packing quantity in tape and reel
		Load voltage	Load current		Tape and reel packing style (Picked from the 1 and 4-pin side)	Tape and reel packing style (Picked from the 2 and 3-pin side)	
AC/DC dual use	Low on-resistance (R type)	40 V	0.25A	SSOP	AQY221FR2VY	AQY221FR2VW	3,500 pcs.
	Low capacitance (C type)	40 V	0.12A		AQY221FN2VY	AQY221FN2VW	

Notes: \*1 Indicate the peak AC and DC values.

\*2 Packing quantity of 1,000 pieces is possible. Please contact our sales office.

For space reasons, the three initial letters of the part number "AQY", and the package (SSOP) indicator "V" and the packing style indicator "Y" or "W" are not marked on the device. (Ex. the label for product number AQY221FR2VY is 221FR2)

### RATING

#### 1. Absolute maximum ratings (Condition: ambient temperature 25°C 77°F)

Item		Symbol	AQY221FR2V	AQY221FN2V	Remarks
Input	Input voltage	V <sub>IN</sub>	6V		
	Input reverse voltage	V <sub>RIN</sub>	5V		
	Power dissipation	P <sub>in</sub>	65mW		
Output	Load voltage (peak AC)	V <sub>L</sub>	40V		
	Load current	I <sub>L</sub>	0.25A	0.12A	Peak AC, DC
	Peak load current	I <sub>peak</sub>	0.75A	0.2A	100ms (1shot), V <sub>L</sub> =DC
	Power dissipation	P <sub>out</sub>	250mW		
Total power dissipation		P <sub>T</sub>	300mW		
I/O isolation voltage		V <sub>iso</sub>	500V AC		
Operating temperature		T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F		Non-condensing at low temperatures
Storage temperature		T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F		

# RF SSOP C×R10 Voltage-sensitive (AQY221F○2V)


## 2. Electrical characteristics (Condition: ambient temperature 25°C 77°F)

Item		Symbol	AQY221FR2V	AQY221FN2V	Condition
Input	Operate voltage	Typ.	1.3V		AQY221FR2V: I <sub>L</sub> = Max. AQY221FN2V: I <sub>L</sub> = 80mA
		Max.	4V		
	Turn off voltage	Min.	0.8V		
		Typ.	1.3V		
Input current	Typ.	I <sub>IN</sub>	8.5mA		V <sub>IN</sub> = 5V
Output	On resistance	Typ.	0.75Ω	9.5Ω	AQY221FR2V: V <sub>IN</sub> = 5V, I <sub>L</sub> = Max. AQY221FN2V: V <sub>IN</sub> = 5V, I <sub>L</sub> = 80mA Within 1 s on time
		Max.	1.25Ω	12.5Ω	
	Output capacitance	Typ.	12.5pF	1pF	V <sub>IN</sub> = 0V, V <sub>B</sub> = 0V, f = 1MHz
		Max.	18pF	1.5pF	
Off state leakage current	Typ.	I <sub>Leak</sub>	0.02nA	0.01nA	V <sub>IN</sub> = 0V, V <sub>L</sub> = Max.
	Max.	10nA (1nA or less)*			
Transfer characteristics	Turn on time**	Typ.	0.05ms	0.01ms	AQY221FR2V: V <sub>IN</sub> = 5V, V <sub>L</sub> = 10V, R <sub>L</sub> = 40Ω AQY221FN2V: V <sub>IN</sub> = 5V, V <sub>L</sub> = 10V, R <sub>L</sub> = 125Ω
		Max.	0.5ms		
	Turn off time**	Typ.	0.06ms	0.03ms	f = 1MHz, V <sub>B</sub> = 0V
		Max.	0.2ms		
	I/O capacitance	Typ.	C <sub>iso</sub>	0.8pF	f = 1MHz, V <sub>B</sub> = 0V
		Max.		1.5pF	f = 1MHz, V <sub>B</sub> = 0V
Initial I/O isolation resistance	Min.	R <sub>iso</sub>	1,000MΩ		500V DC

Note: If you wish to change the input voltage, rating or performance, please inquire with our sales.

\*Available as custom orders (1 nA or less)

\*\*Turn on/Turn off time

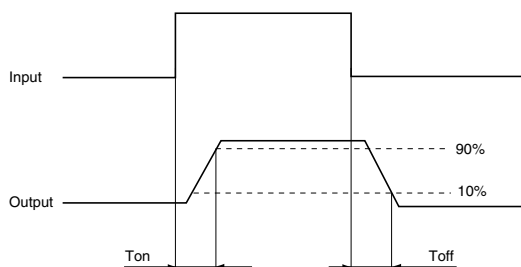

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Minimum	Typical	Maximum	Unit
Input voltage	V <sub>IN</sub>	4.5	5	5.5	V

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.



## REFERENCE DATA


### 1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

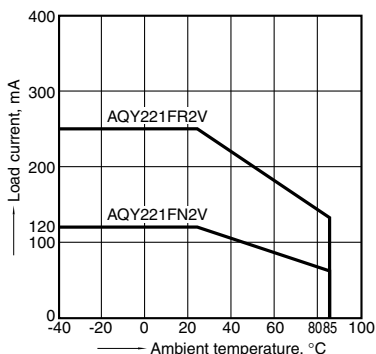


### 2. Load current vs. Load voltage characteristics

Ambient temperature: 25°C 77°F

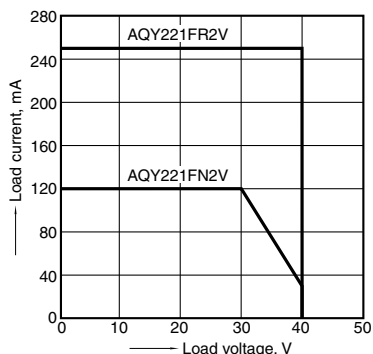


### 3. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4  
Input voltage: 5V; Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

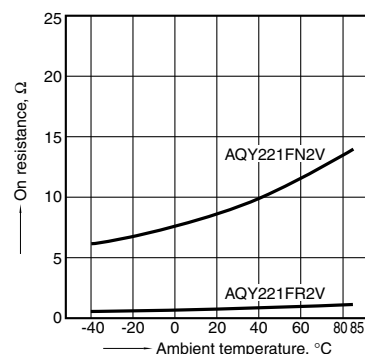


### 4. Turn on time vs. ambient temperature characteristics

Input voltage: 5V; Load voltage: 10V (DC);  
Continuous load current: 250mA (DC) R type,  
80mA (DC) C type

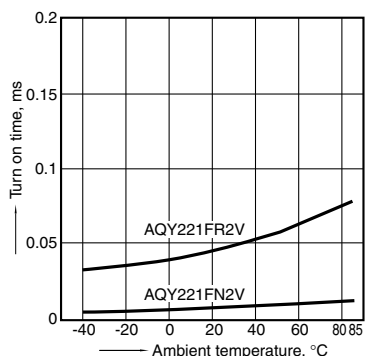


### 5. Turn off time vs. ambient temperature characteristics

Input voltage: 5V; Load voltage: 10V (DC);  
Continuous load current: 250mA (DC) R type,  
80mA (DC) C type

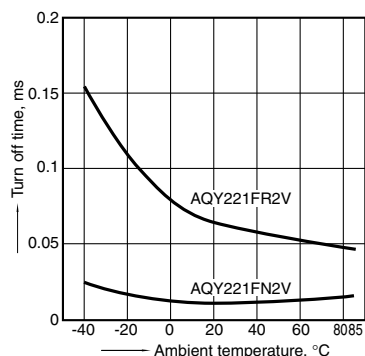


### 6. Turn on voltage vs. ambient temperature characteristics

Load voltage: 10V (DC);  
Continuous load current: 250mA (DC) R type,  
80mA (DC) C type

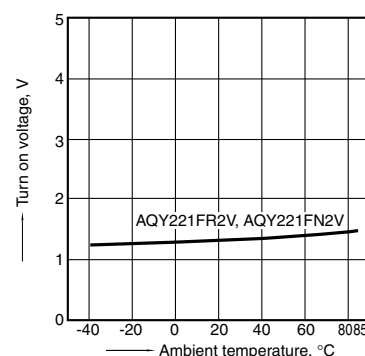


### 7. Turn off voltage vs. ambient temperature characteristics

Load voltage: 10V (DC);  
Continuous load current: 250mA (DC) R type,  
80mA (DC) C type

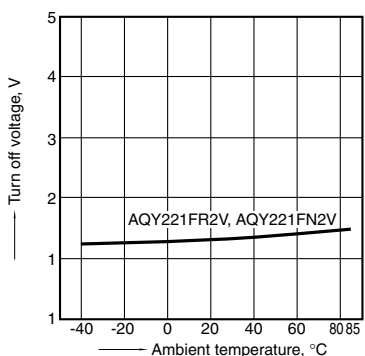


### 8. Input current vs. ambient temperature characteristics

Input voltage: 5V

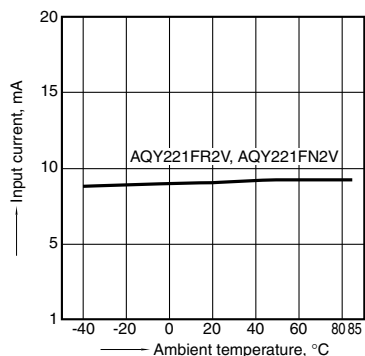

### 9. Current vs. voltage characteristics of output at MOS portion


Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F



# RF SSOP C×R10 Voltage-sensitive (AQY221F○2V)


## 10. Input current vs. input voltage characteristics

Ambient temperature: 25°C 77°F  
(Recommended input voltage: 5±0.5V)

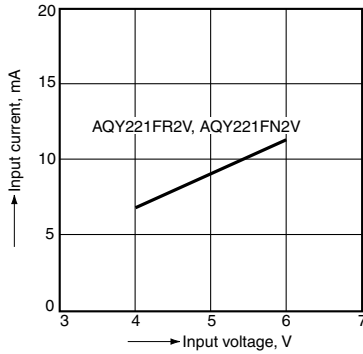


## 11. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

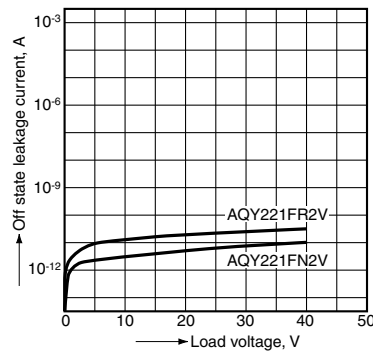


## 12. Turn on time vs. input voltage characteristics

Measured portion: between terminals 3 and 4  
Load voltage: 10V (DC);  
Continuous load current: 250mA (DC) R type,  
80mA (DC) C type; Ambient temperature: 25°C 77°F

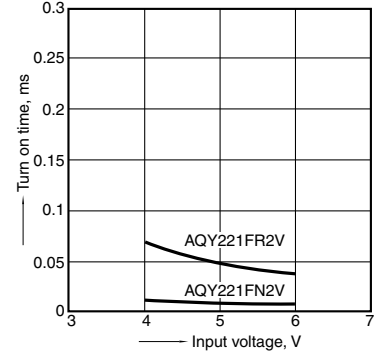


## 13. Turn off time vs. input voltage characteristics

Measured portion: between terminals 3 and 4  
Load voltage: 10V (DC);  
Continuous load current: 250mA (DC) R type,  
80mA (DC) C type; Ambient temperature: 25°C 77°F

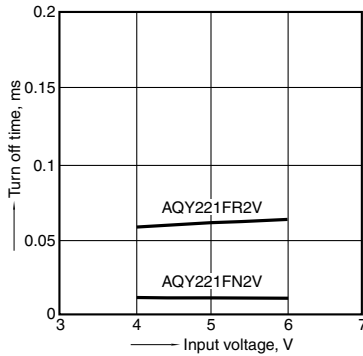


## 14. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4  
Frequency: 1 MHz, 30m Vrms;  
Ambient temperature: 25°C 77°F

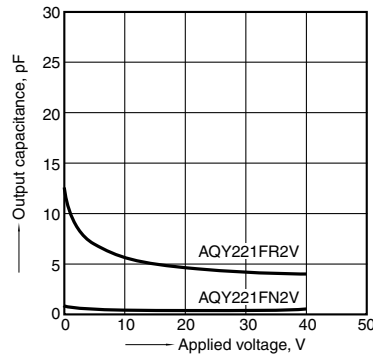

## 15. Isolation vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

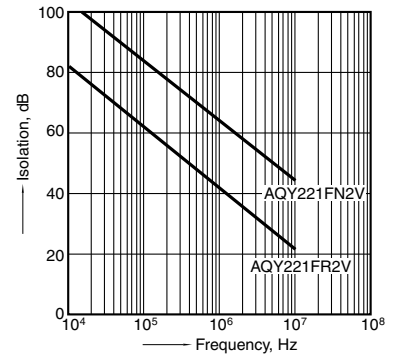

## 16. Insertion loss vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

