



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

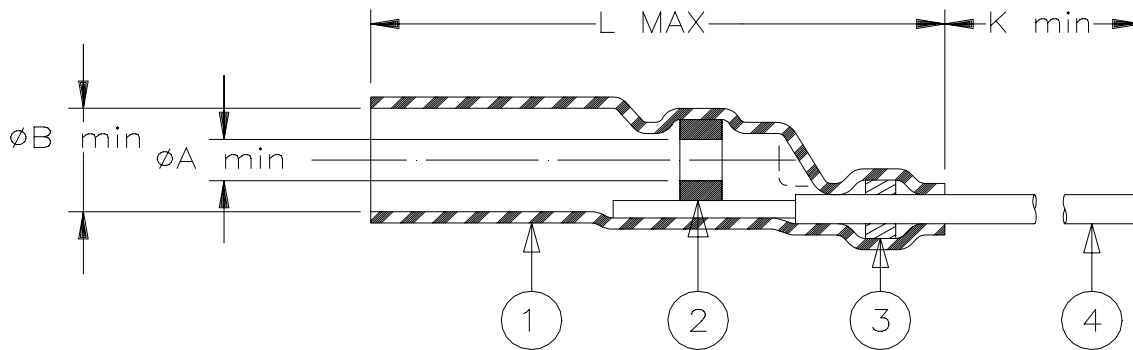

| Product Revisions | | "XY" Wire Gauge (AWG) | | | | Cable Dimensions | | | |
|-------------------|---|-----------------------|----------------|----------------|----------------|------------------|----------------|----------------|--------------|
| | | L max | A min | B min | K min | D | F | M±0.5 (M±0.02) | |
| B-801-62 | F | 17.5 (0.690) | 1.4 (0.055) | 2.8 (0.110) | 150 (5.900) | 22 | 0.6 (0.025) | 0.3 (0.015) | 5 (0.200) |
| B-801-64 | F | | | | | 24 | to | to | |
| B-801-66 | G | | | | | 26 | 2.4 (0.095) | 1.3 (0.050) | |


MATERIAL

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
2. SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Sn63 per ANSI J-STD-006.
FLUX: TYPE ROL1 per ANSI J-STD-004.
3. MELTABLE RING: Thermally stabilized thermoplastic. Color: red.
4. CONDUCTOR LEAD: Raychem 55A0111-XY in accordance with MIL-W-22759/32 AWGXY (see table) stranded tin plated copper wire. Color: white.

APPLICATION

1. These controlled soldering devices are designed to terminate with a stranded extension lead:
 - A metallic pin or
 - the primary of a coaxial cable or
 - one or several tin or silver plated wire(s), having an insulation rated for at least +125°C.
2. Temperature range: -55°C to +150°C.
3. Install using Raychem-approved convection or infrared tools in accordance with Raychem installation procedure RPIP-825-00.

For best results, prepare the wire(s) as shown:

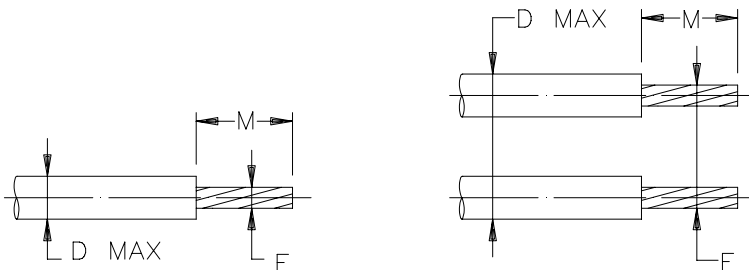

| | | | | | | | |
|---|---|---|--|----------------|---|------------------|---------------------|
| Raychem | | THERMOFIT DEVICES | Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA | | TITLE: SOLDERSLEEVE* DEVICE EXTENSION | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS. | | | | | DOCUMENT NO.: B-801-6X | | |
| TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A | ANGLES: N/A ROUGHNESS IN MICRON | Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application. | | | DCR NUMBER: D981701 | | REPLACES: B8016X |
| DRAWN BY: R. MAPALO | DATE: 16-Oct-98 | REV.: SEE TABLE | DOC ISSUE: 3 | SCALE: NONE | SIZE: A | SHEET: 1 of 1 | |

If this document is printed it becomes uncontrolled. Check for the latest revision.

SPECIFICATION CONTROL DRAWING

*A trademark of Raychem Corporation.

| | | | | | | |
|---|---|--|---|----------------|---------------------|------------------|
| Raychem | THERMOFIT DEVICES | Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA | TITLE: SOLDERSLEEVE* DEVICE EXTENSION | | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS. | | | DOCUMENT NO.: B-801-6X | | | |
| TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A | ANGLES: N/A ROUGHNESS IN MICRON | Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application. | DCR NUMBER: D981701 | | REPLACES: B8016X | |
| DRAWN BY: R. MAPALO | DATE: 16-Oct-98 | REV.: SEE TABLE | DOC ISSUE: 3 | SCALE: NONE | SIZE: A | SHEET: 1 of 1 |

If this document is printed it becomes uncontrolled. Check for the latest revision.