



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HDMI over Powerline Active Extender Kit - IR Control, 1080p @ 60 Hz, 300 m (984 ft.)

MODEL NUMBER: **B126-1A1-PLHD**

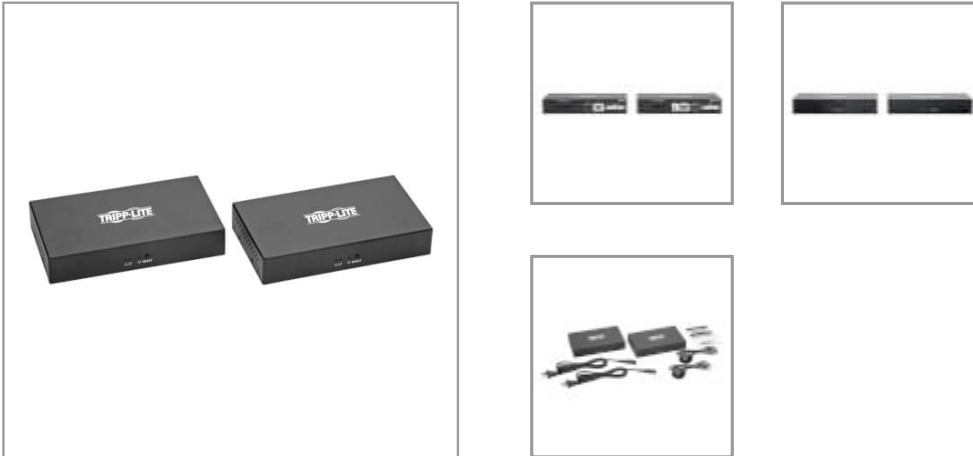

Extends an HDMI audio/video signal (1080p @ 60 Hz) up to 300 m (984 ft.) from the source using existing power outlets.

Features

HDMI via Powerline Extender Kit Sends 1080p A/V Signals Through Existing AC Outlets

Now you can transmit picture-perfect high-definition audio/video signals to an HDMI television, monitor or projector up to 300 meters (984 feet) away without buying new cables, setting up a wireless network or hiring a professional installer. Just use the electrical wiring already available in your home, office or presentation space. Plug the transmitter into one wall outlet and the receiver into another with the included four-foot power cords. Be sure both outlets are on the same power circuit. Plug both units directly into the outlets and not an extension cord, power strip or surge protector.

A Reliable Solution for Home Theaters, Digital Signage and Video Presentations

This HDMI via Powerline kit is ideal for audio/video setups in which the source and display devices are in different rooms and wi-fi reception is either weak or unavailable. Connect the included infrared (IR) cables and user-provided HDMI cables (such as Tripp Lite's P568-Series) to both the transmitter and receiver. You can connect a local HDMI display to the transmitter, as well as to the receiver. With no busy cabling infrastructure to clutter your application, you're free to place your source and display devices where needed.

IR Pass-Through Technology Lets You Control the Video from the Next Room

The IR cables let you control your source device with its remote (play, pause, fast forward, etc.), while you're standing near the receiver located up to 300 meters away. As long as the transmitter's IR bulb is within sight of the transmitter and the receiver's IR bulb is in range of the source's remote, the transmitter and receiver can be mounted out of sight to give the rooms a clean, professional look.

Plug-and-Play Operation for Quick Setup and Immediate 1080p Transmissions

The B126-1A1-PLHD works right out of the box with no software or drivers required. Mounting hardware is included for installing the transmitter and receiver units on a wall or other flat surface. The kit supports high-definition video resolutions up to 1920 x 1080 (1080p) at 60 Hz with 24-bit Deep Color (8 bits per channel) and stereo audio. Front-panel LEDs indicate power, data transmission and connection status. The kit supports HDMI 1.3 with full HDCP 1.2 compliance.

One-Year Warranty

The B126-1A1-PLHD is backed by a one-year warranty, ensuring reliability and performance.

Highlights

- HDMI via Powerline extender saves money on cabling and wireless installation
- Transmits HDMI audio/video signals through existing wall outlets—convenient!
- IR pass through allows you to use your source's remote while near the display
- Supports crystal-clear HD video resolutions up to 1920 x 1080 (1080p) @ 60 Hz
- Easy plug-and-play operation—just plug in the transmitter and receiver and play video

Applications

- Watch the same movie or television show on more than one display in your home, small office or other space with spotty wi-fi reception
- Transmit digital signage to a display located on the other side of a wall or across the building
- Save money on cabling installation by using existing electrical infrastructure to transmit audio/video

System Requirements

- Source device with an HDMI port (Blu-ray player, computer, laptop)
- Display device with an HDMI port (HDTV, projector, monitor)
- 100–120V AC power input



Package Includes

- Transmitter unit
- Receiver unit
- IR-IN cable
- IR-OUT cable
- (2) C7 to NEMA 1-15P power cords, 4 ft.
- Mounting hardware
- Owner's manual

Specifications

OVERVIEW	
UPC Code	037332206084
Technology	HDMI (All types)
USER INTERFACE, ALERTS & CONTROLS	
LED Indicators	Blue (Power), Green (Connection), Yellow (Data Transmission)
PHYSICAL	
Unit Packaging Type	Box
Material of Construction	Metal
Included Mounting Accessories	Yes
Color	Black
Transmitter Unit Dimensions (hwd / in.)	1.1 x 6.2 x 3.5
Transmitter Unit Dimensions (hwd / cm.)	2.8 x 15.8 x 8.9
Receiver Unit Dimensions (hwd / in.)	1.1 x 6.2 x 3.5
Receiver Unit Dimensions (hwd / cm.)	2.8 x 15.8 x 8.9
Transmitter Unit Weight (lbs.)	1
Transmitter Unit Weight (kg)	1
Receiver Unit Weight (lbs.)	1
Receiver Unit Weight (kg)	1
ENVIRONMENTAL	
Operating Temperature Range	32 to 140 F (0 to 60 C)



Storage Temperature Range	-4 to 158 F (-20 to 70 C)
Relative Humidity	0% to 95% RH, Non-Condensing
BTUs	Tx: 25.6 BTU/Hr; Rx: 23.9 BTU/Hr
Power Consumption (Watts)	Tx: 7.5; Rx: 7
COMMUNICATIONS	
Signal Range (ft.)	984
Signal Range (m)	300
Latency	120ms
CONNECTIONS	
Ports	5
Side A - Connector 1	3.5MM (FEMALE); (2) HDMI (FEMALE)
Side B - Connector 1	3.5MM (FEMALE); HDMI (FEMALE)
Connector Plating	Gold
FEATURES & SPECIFICATIONS	
Max Supported Video Resolution	1080p @60Hz
HDMI Specification	1.3
HDCP Specification	1.2
Audio Specification	R/L Stereo Audio
Driver Required	No
Max Supported Color Depth	24-bit True Color
EDID Compatible	Yes
IR Remote Extension Support	Yes
3D Video Supported	Yes
CERTIFICATIONS	
Certifications	Tested to FCC, RoHS, REACH
WARRANTY	
Product Warranty Period (Worldwide)	1-year limited warranty

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>