



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## VRLA Rechargeable Battery

# BP1.0-6 (BP1.0-6FR)



### FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Absorbent Glass Mat technology for efficient gas recombination.

### APPLICATION

- UPS
- Security
- Medical
- Lojack



### SPECIFICATIONS

Nominal Voltage	6 V
Nominal Capacity	1.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	250g(0.55lbs.)
Terminals	T1 (Faston Tab 187)
Internal Resistance	≤65m Ω (Fully Charged )
Max. Discharge Current	15 A (5 sec.)
Max. Charge Current	0.3 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)

ISO 9001	
ISO14001	
UL	
CE	
<ul style="list-style-type: none"> <li>● IEC 61056-1</li> <li>● JIS C 8702-1</li> <li>● GB/T 19639.1</li> </ul>	

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

#### Length

51±1.5 (2.01±0.06)

#### Width


42±1.5 (1.65±0.06)

#### Container Height


51±1.5 (2.01±0.06)

#### Total Height

56±2.0 (2.20±0.08)

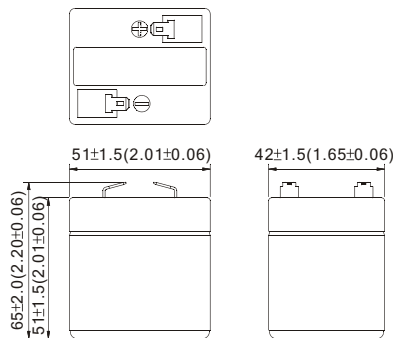

#### Terminal T1



### Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	18.08	13.31	10.66	6.35	3.639	1.457	1.005	0.562	0.296
1.75V	20.92	14.42	11.15	6.59	3.748	1.487	1.020	0.570	0.300
1.70V	22.23	14.94	11.50	6.74	3.816	1.500	1.026	0.573	0.300
1.65V	23.23	15.29	11.76	6.83	3.861	1.510	1.029	0.575	0.300
1.60V	24.00	15.60	12.00	6.90	3.900	1.520	1.032	0.575	0.300

### Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	3.26	2.34	1.85	1.075	0.612	0.243	0.167	0.094	0.049
1.75V	3.84	2.54	1.94	1.116	0.630	0.248	0.170	0.095	0.050
1.70V	4.08	2.63	2.00	1.142	0.641	0.250	0.171	0.095	0.050
1.65V	4.26	2.69	2.05	1.158	0.649	0.252	0.172	0.096	0.050
1.60V	4.40	2.75	2.09	1.169	0.655	0.253	0.172	0.096	0.050

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.