

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VRLA Rechargeable Battery

BPL12-12



FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- Absorbent Glass Mat technology for efficient gas recombination.

APPLICATION

- UPS
- Laboratory Equipment
- Toy-Cars
- Power Packs
- Fishing Lights



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	12.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	4.1Kg(9.04lbs.)
Terminals	T2 (Faston Tab 250) T1 is optional
Internal Resistance	≤16m Ω (Fully Charged)
Max. Discharge Current	180 A (5 sec.)
Max. Charge Current	3.6 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS(UL 94-HB) BPL12-12 Optional: Flame Retardant ABS(UL 94-V0) BPL12-12FR



- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

- **Length**
151±1.5 (5.94±0.06)
- **Width**
98±1.5 (3.86±0.06)
- **Container Height**
94±1.5 (3.70±0.06)
- **Total Height**
98±2.0 (3.86±0.08)

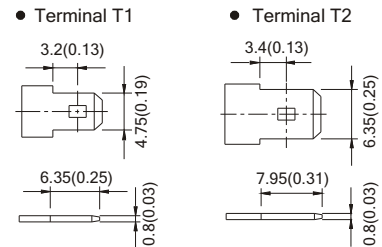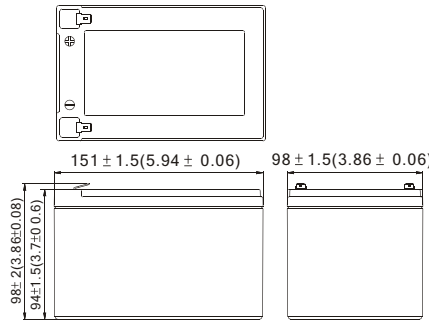

Constant power discharge characteristics at 25 °C/77 °F Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	391.0	293.8	238.1	143.2	83.0	35.0	24.10	13.48	7.05
1.75V	452.0	318.3	249.0	148.6	85.5	35.7	24.50	13.68	7.20
1.70V	480.0	329.8	256.7	152.0	87.0	36.0	24.60	13.75	7.23
1.65V	502.0	337.7	262.6	154.2	88.0	36.3	24.70	13.80	7.25
1.60V	518.0	344.4	267.8	155.7	88.9	36.5	24.80	13.80	7.25

Constant current discharge characteristics at 25 °C/77 °F Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	35.23	25.86	20.70	12.14	6.97	2.92	2.008	1.123	0.588
1.75V	41.47	28.02	21.65	12.59	7.18	2.98	2.042	1.140	0.600
1.70V	44.04	29.03	22.32	12.88	7.31	3.00	2.050	1.146	0.603
1.65V	46.06	29.73	22.83	13.07	7.39	3.03	2.058	1.150	0.604
1.60V	47.52	30.32	23.29	13.19	7.47	3.04	2.067	1.150	0.604

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.