



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## Damper diode fast, high-voltage

**BY359-1500, BY359-1500S**

### FEATURES

- Low forward volt drop
- Fast switching
- Soft recovery characteristic
- High thermal cycling performance
- Low thermal resistance

### SYMBOL

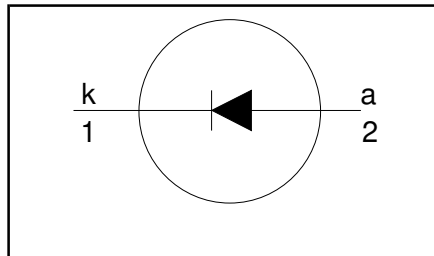

### QUICK REFERENCE DATA

$V_R = 1500\text{ V}$
$V_F \leq 1.8\text{ V} / 2\text{ V}$
$I_{F(RMS)} = 15.7\text{ A}$
$I_{FSM} \leq 60\text{ A}$
$t_{rr} \leq 600\text{ ns} / 350\text{ ns}$

### GENERAL DESCRIPTION


Glass-passivated double diffused rectifier diode featuring low forward voltage drop, fast reverse recovery and soft recovery characteristic. The device is intended for use in TV receivers and PC monitors.

The BY359 series is supplied in the conventional leaded SOD59 (TO220AC) package.

### PINNING

PIN	DESCRIPTION
1	cathode
2	anode
tab	cathode

### SOD59 (TO220AC)

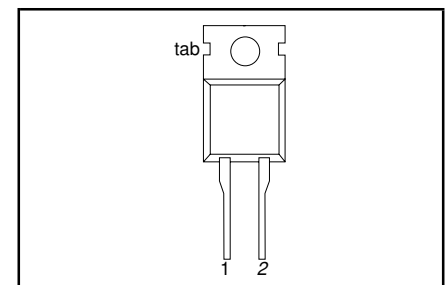

### LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{RSM}$	Peak non-repetitive reverse voltage		-	1500	V
$V_{RRM}$	Peak repetitive reverse voltage		-	1500	V
$V_{RWM}$	Crest working reverse voltage		-	1300	V
$I_{F(peak)}$	Peak forward current	16-32kHz TV BY359-1500 31-70kHz monitor BY359-1500S	-	10	A
$I_{F(RMS)}$	RMS forward current		-	7	A
$I_{FRM}$	Peak repetitive forward current		-	15.7	A
$I_{FSM}$	Peak non-repetitive forward current	sinusoidal; $a = 1.57$ $t = 10\text{ ms}$ $t = 8.3\text{ ms}$ sinusoidal; $T_j = 150\text{ °C}$ prior to surge; with reapplied $V_{RWM(max)}$	-	60	A
$T_{stg}$	Storage temperature		-40	150	°C
$T_j$	Operating junction temperature		-	150	°C

### THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th\ j-mb}$	Thermal resistance junction to mounting base		-	-	2.0	K/W
$R_{th\ j-a}$	Thermal resistance junction to ambient	in free air.	-	60	-	K/W

Damper diode  
fast, high-voltage

BY359-1500, BY359-1500S

STATIC CHARACTERISTICS



T<sub>j</sub> = 25 °C unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	BY359-1500		BY359-1500S		UNIT
			TYP.	MAX.	TYP.	MAX.	
V <sub>F</sub>	Forward voltage	I <sub>F</sub> = 20 A	1.3	1.8	1.5	2.0	V
I <sub>R</sub>	Reverse current	I <sub>F</sub> = 10 A; T <sub>j</sub> = 150 °C	1.00	1.5	1.25	1.75	V
		V <sub>R</sub> = 1300 V	10	100	10	100	μA
		V <sub>R</sub> = 1300 V; T <sub>j</sub> = 100 °C	50	300	100	600	μA

DYNAMIC CHARACTERISTICS

T<sub>j</sub> = 25 °C unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	BY359-1500		BY359-1500S		UNIT
			TYP.	MAX.	TYP.	MAX.	
t <sub>rr</sub>	Reverse recovery time	I <sub>F</sub> = 2 A; V <sub>R</sub> ≥ 30 V;	0.47	0.60	0.28	0.35	μs
Q <sub>s</sub>	Reverse recovery charge	-di <sub>F</sub> /dt = 20 A/μs	1.6	2.0	0.70	0.95	μC
V <sub>fr</sub>	Peak forward recovery voltage	I <sub>F</sub> = 10 A; di <sub>F</sub> /dt = 30 A/μs	11.0	-	17.0	-	V

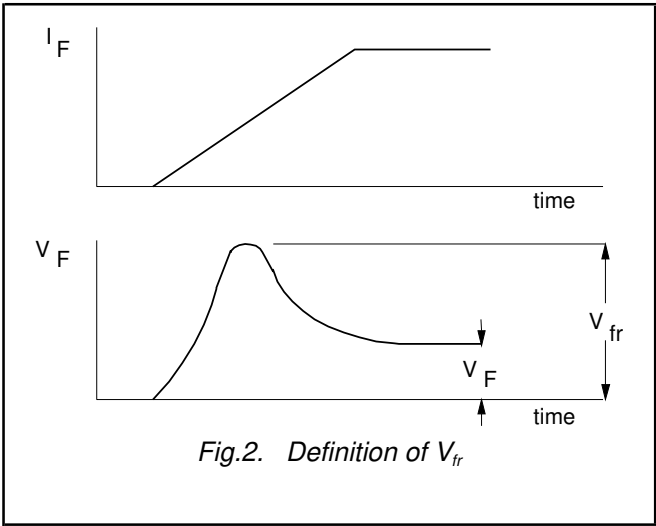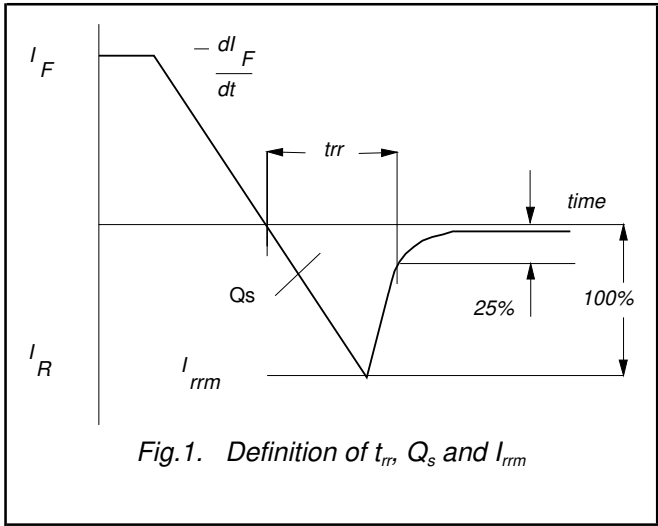

# Damper diode fast, high-voltage

## BY359-1500, BY359-1500S

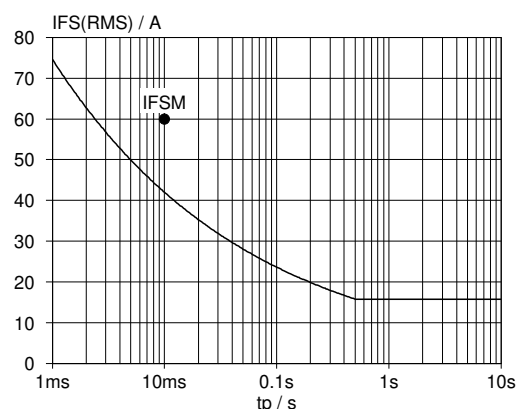


Fig.3. Maximum non-repetitive rms forward current.  $I_F = f(t_p)$ ; sinusoidal current waveform;  $T_j = 150^\circ\text{C}$  prior to surge with reapplied  $V_{RWM}$ .

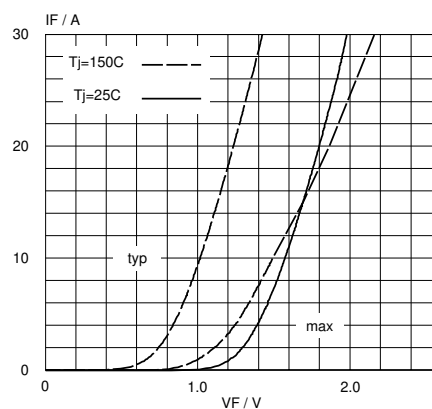


Fig.5. BY359-1500 forward characteristic  $I_F = f(V_F)$ ; parameter  $T_j$

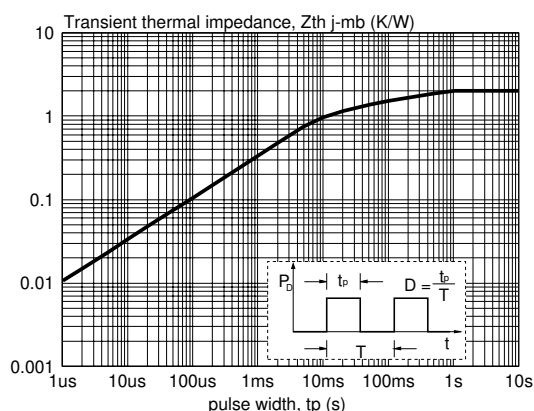


Fig.4. Transient thermal impedance  $Z_{th} = f(t_p)$

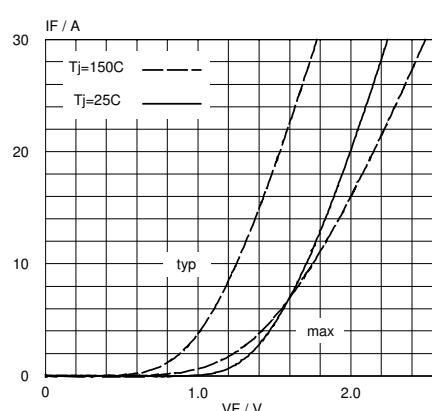


Fig.6. BY359-1500S forward characteristic  $I_F = f(V_F)$ ; parameter  $T_j$

# Damper diode fast, high-voltage

BY359-1500, BY359-1500S

## MECHANICAL DATA

Dimensions in mm

Net Mass: 2 g

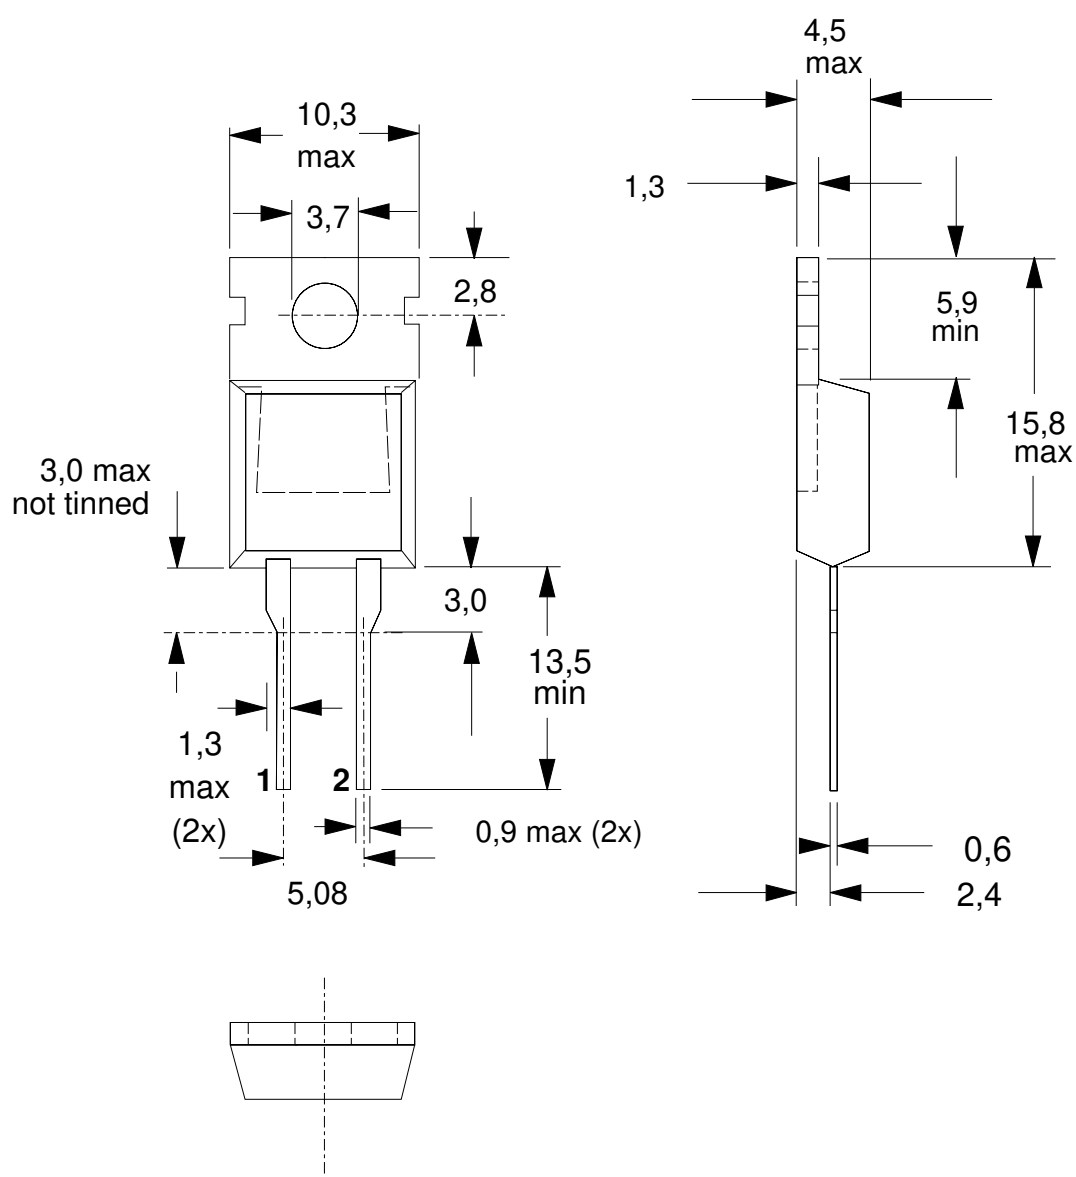


Fig.7. SOD59 (TO220AC). pin 1 connected to mounting base.

### Notes

1. Refer to mounting instructions for TO220 envelopes.
2. Epoxy meets UL94 V0 at 1/8".

Damper diode  
fast, high-voltage

BY359-1500, BY359-1500S

## DEFINITIONS

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	
<b>© Philips Electronics N.V. 1998</b>	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

## LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.