



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





CD Series White LED Linear Fixture

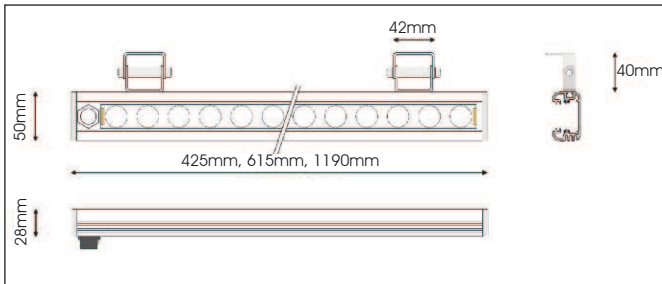

Certifications & Compliance

- ▷ IP67 rated version available
- ▷ CE Compliant

Features & Benefits:

- ▷ Single colour linear modules utilises the latest high efficiency LUXEON Rebel LED technology
- ▷ >70% lumen maintenance @ 50,000 hours at max operating temperature
- ▷ Low power consumption
- ▷ Choice of LED colour and optical patterns available

Application:

Utilizes the latest high efficiency LUXEON® Rebel LED technology. Applications include Retail Lighting, Exterior Lighting, Architectural Lighting, Wall Washing, Nightclubs and Entertainment. Choice of optical patterns available. All of Dialight's long life LED luminaires are designed to meet the most demanding specification criteria while offering maximum energy savings, reduced maintenance costs, and a superior quality of light.

All of Dialight's long life LED luminaires are designed to meet the most demanding specification criteria while offering maximum energy savings, reduced maintenance costs, and a superior quality of light.

Mechanical Information:

Container Dimensions: 28mm x 50mm x Length
[1.10" x 1.97" x Length]

Lengths available:
425mm [16.73"]
615mm [24.21"]
1190mm [46.85"]

Container Weight:
425mm - 1.2kg / 2.6lbs
615mm - 1.6kg / 3.5lbs
1190mm - 2.5kg / 5.5lbs

Mounting: Adjustable Stainless Steel Brackets

Electrical specifications:

Operating Temperature: -20°C to +50°C

Drive Current: 350mA

Housing: Anodised Aluminium Construction

Lens: Glass Lens (IP) Acrylic Lens (Non -IP)

Photometric Information:

CDS425mm 12 LEDs
CDS615mm 18 LEDs
CDS1190mm 36 LEDs

CDS - BBBB - CC - D - EE

Order Codes:

Length (BBBB)		Typical Colour Temperature. (CC)	Lens Type (D)	IP Rating Option (EE)
Length (mm)	# of LED's			
425	12	CW = 5000K - 6350K	S = Spot 5° M = Medium 8° W = Wide 20°	IP = IP67
615	18	NW = 3800K - 4100K	V = Oval 8° X 25°	Blank = Non IP
1190	36	WW = 2850K - 3250K	D = Spot Diffused 7°	

Ordering Codes: Compatible Drivers

Part Number	DESCRIPTION
Colour Driver 36	3 channel DMX controllable LED driver. Up to 12 LEDs per channel, 350mA max drive current

Series LED Fixture


Cables and Accessories

Accessory Code	Description
CAB-FX8S-3	3 Metre Cable links Colourdriver to Junction Block or LED strip
CAB-INFX8S-3	3 Metre Cable links Colourdriver to Extension Cables (CABX)
CABX-8S-8P-5	5 Metre IP67 Extension Cable
CABX-8S-8P-10	10 Metre IP67 Extension Cable
CABX-8S-8P-20	20 Metre IP67 Extension Cable
B8-JB-3	IP67 Junction Block 1 in 3 Out
B8-JB-C	IP67 Junction Block Common Connector
BRKT-STD	Low Profile - Small Bracket (Pairs) Stainless

Operating Characteristics

Model / Colour	Initial Lumen Output	Power Consumption	Input Voltage
CD 425 / CW	1200	14.4 Watts	*13.3 - 16.0 VDC (per channel)
CD 425 / NW	1200		
CD 425 / WW	600		
CD 615 / CW	1800	21.6 Watts	*20.0 - 24.0 VDC (per channel)
CD 615 / NW	1800		
CD 615 / WW	900		
CD 1190 / CW	3600	43.2 Watts	*40.0 - 48.0 VDC (per channel)
CD 1190 / NW	3600		
CD 1190 / WW	1800		

Typical Wiring Examples

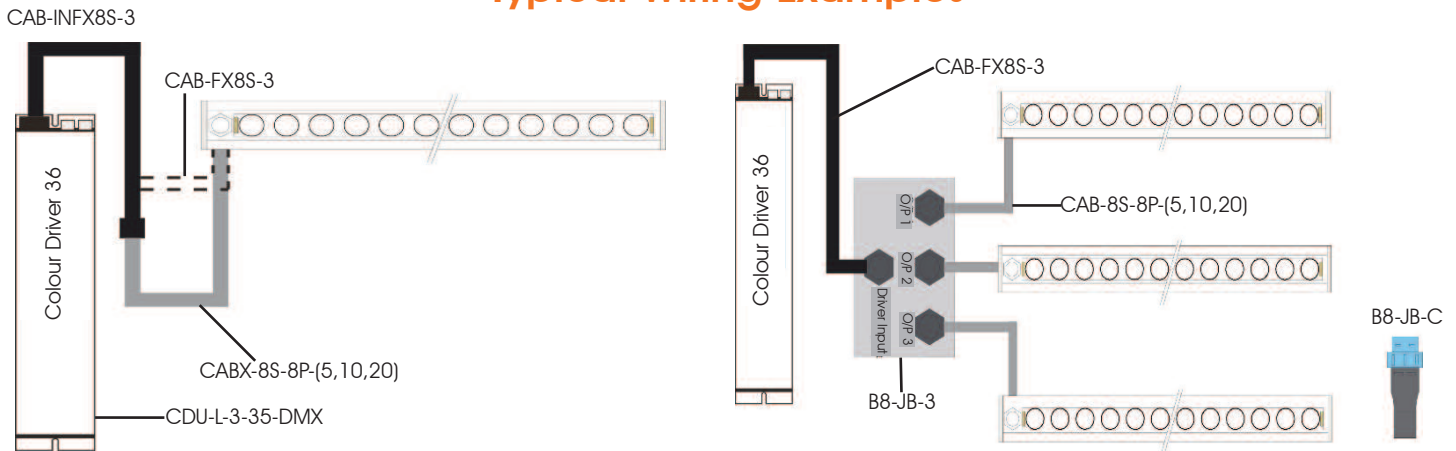

Options connecting to B8-JB-3 (spare outputs requires B8-JB-C)

Product	MAX	MIN
CDS-425	3	2
CDS-625	2	1

Dialight reserves the right to make changes at any time in order to supply the best product possible.

The most current version of this document will always be available at:
www.dialight.com/Assets/Brochures_And_Catalogs/Illumination/MDEXLUMCDX001.pdf

MDEXLUMCDX001_B