



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features

- Low Insertion Loss
- Low Ripple
- Excellent Rejection and Isolation

Description

Surface mount, silver (Ag) coated ceramic duplexer. Developed for use in 800 MHz Infrastructure Applications.

Weight: 12.25 grams typical

Material: Filter is composed of a ceramic block plated with Ag and a shield made of Sn plated steel.

Filter complies with RoHS standards.



Electrical Specifications

Parameter	Frequency (MHz)	Typical @ 25°C	Spec. @ 25°C	Spec. over -40°C to +85°C
TX to Antenna Response				
Passband Insertion Loss	824 - 849	1.5 dB	1.8 dB max	2.0 dB max
Passband Ripple	824 - 849	1.0 dB	1.4 dB max	1.5 dB max
Passband Return Loss @ TX	824 - 849	14.3 dB	12 dB min	12 dB min
Passband Return Loss @ ANT	824 - 849	13.4 dB	12 dB min	12 dB min
Attenuation:	869 - 894	47.9 dB	44 dB min	44 dB min
	1648 - 1698	25.0 dB	18 dB min	18 dB min
Antenna to RX Response				
Passband Insertion Loss	869 - 894	2.2 dB	2.6 dB max	3.0 dB max
Passband Ripple	869 - 894	1.0 dB	1.5 dB max	1.8 dB max
Passband Return Loss @ RX	869 - 894	13.6 dB	11 dB min	11 dB min
Passband Return Loss @ ANT	869 - 894	14.2 dB	11 dB min	11 dB min
Attenuation:	824 - 849	64.9 dB	55 dB min	55 dB min
	1648 - 1698	25.0 dB	18 dB min	18 dB min
TX to RX Response				
Rejection	859	50.0 dB	45 dB min	45 dB min
Rejection @ TX band	824 - 849	66.8 dB	58 dB min	58 dB min
Rejection @ RX band	869 - 894	51.5 dB	45 dB min	45 dB min
Power into Any port		6 Watt max		


Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562; US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;DE 0573597;FR 0573597;JP 058149/92;KR 142171;US 5,162,760;US 5,218,329;US 5,250,916;US 5,327,109;US 5,488,335;CA 2114029;FR 9306297;GB 2273393;JP 3205337;KR 115113;CN 93106228.4;US 5,512,866;EP 0706719;DE 0706719;FR 0706719;GB 0706719;CN 95190359.4;US 5,602,518;US 5,721,520;US 5,745,018;EP 0910875;DE 0910875;DK 0910875;FR 0910875;GB 0910875;IE 0910875;JP 505182/98;KR 10-323013;US 5,994,978;US 6,462,629;CN 00810420.4;US 6,559,735;US 6,650,202;US 6,834,429. Other US and foreign patents pending.


CTS Corporation 2006 reserves all copyrights in the layout, design and configuration of the patterns on this product.

Mechanical Drawing

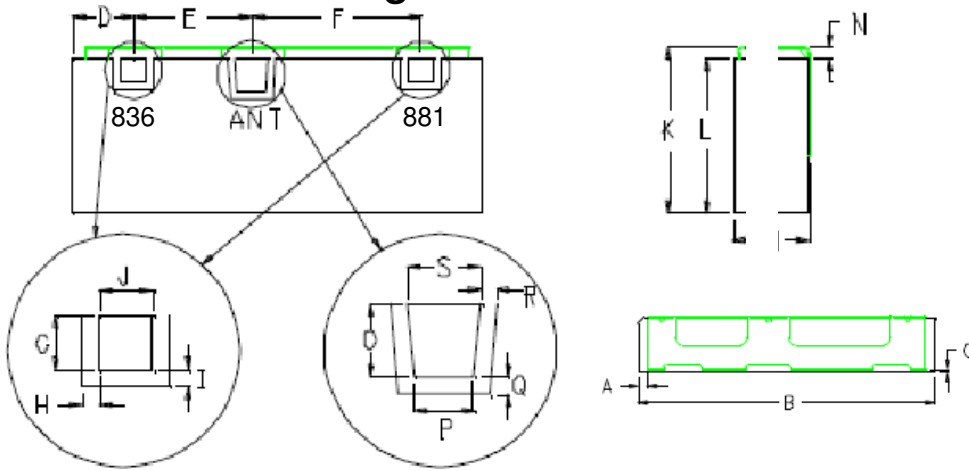


Dim	Nominal (mm)	Tolerance (mm) +/- or max
A		
B	33.80	max
C		
D	5.02	0.25
E	9.67	0.13
F	13.86	0.13
G	2.03	0.13
H	0.64	0.13
I	0.64	0.13
J	2.03	0.13
K	13.70	max
L	12.67	max
M	6.50	max
N	0.89	0.13
O	2.79	0.13
P	2.29	0.13
Q	0.64	0.13
R	0.55	0.13
S	2.79	0.13

Electrical Response

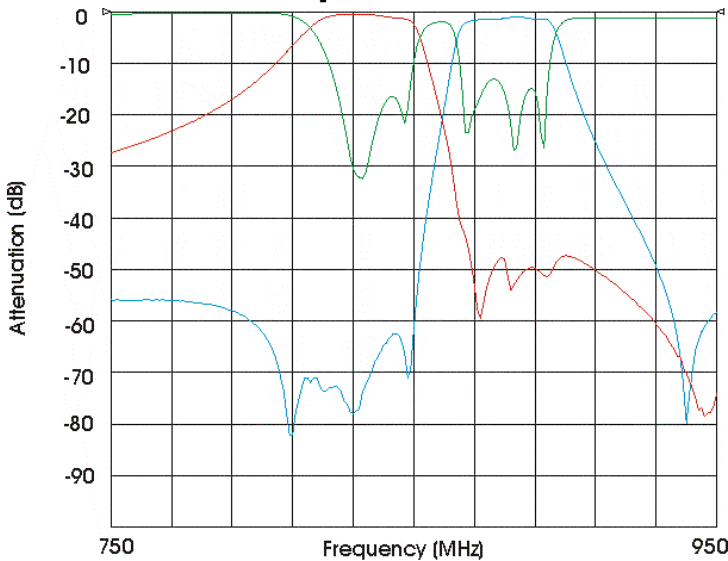

PCB Layout

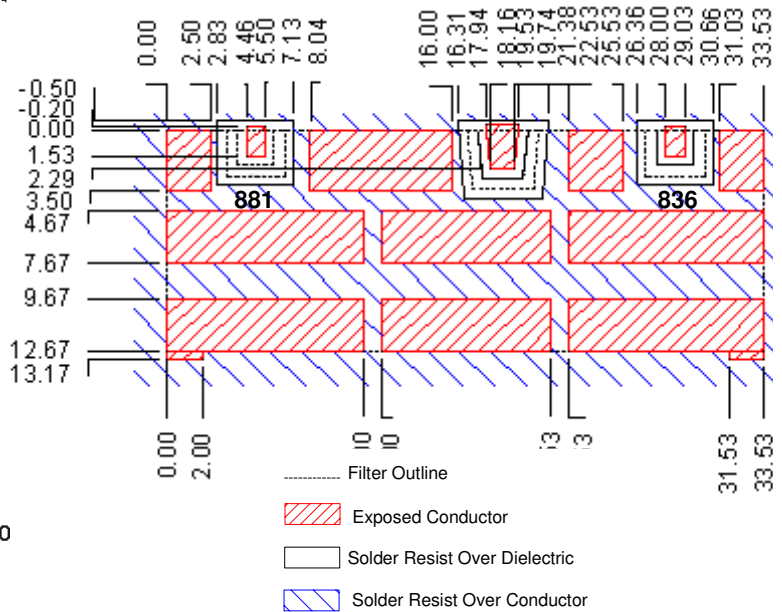

Packaging and Marking

DIMENSION	UNITS	SPECIFICATION
REEL DIAMETER	mm	330
REEL WEIGHT	kg	3.8
REEL QUANTITY	ea.	250

