



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features

- Extended pass band
- Low loss
- High rejection


Description

Surface mount, silver (Ag) coated ceramic duplexer. Developed for use in GSM Infrastructure applications.

Weight: Approximately 8.0 grams typical

Material: Filter is composed of a ceramic block plated with Ag and a shield made of nickel silver plated steel.

Filter complies with RoHS standards.

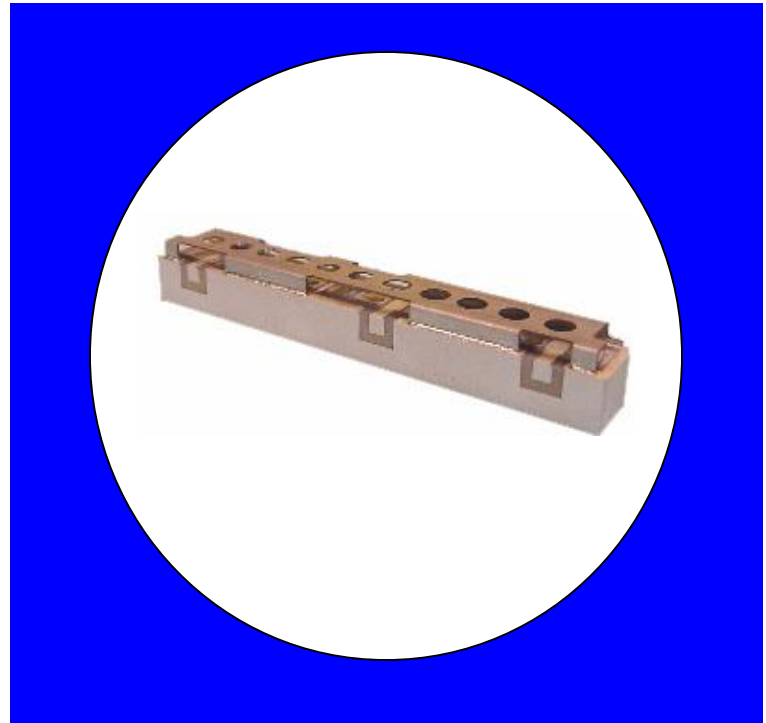

Electrical Specifications

Parameter	Frequency MHz	Typical @ 25°C	Specification @ 25°C	Spec over -40°C to +90°C
Low Band Response (S21)				
Passband Iloss	1850 - 1910	-2.40	-2.70	-3.00
Passband Ripple	1850 - 1910	1.70	1.85	2.00
Passband Return Loss @ Port 2	1850 - 1910	-14.00	-12.00	-12.00
Passband Return Loss @ Ant	1850 - 1910	-14.00	-12.00	-12.00
Attenuation	1930 - 1990	-42.50	-40.00	-40.00
High Band Response (S13)				
Passband Iloss	1930 - 1990	-2.50	-2.70	-3.00
Passband Ripple	1930 - 1990	1.70	1.85	2.00
Passband Return Loss @ Port 3	1930 - 1990	-12.00	-10.00	-10.00
Passband Return Loss @ Ant	1930 - 1990	-12.00	-10.00	-10.00
Attenuation	1850 - 1910	-42.00	-40.00	-40.00
Isolation (S23)				
Rejection @ Low Band	1850 - 1910	-43.00	-40.00	-40.00
Rejection @ High Band	1930 - 1990	-43.00	-40.00	-40.00
Power into any port		6 Watt max		

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:



Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562; US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;DE 0573597;FR 0573597;JP 508149/92;KR 142171;US 5,162,760;US 5,218,329;US 5,250,916;US 5,327,109;US 5,488,335;CA 2114029;FR 9306297;GB 2273393;JP 3205337;KR 115113;CN 93106228.4;US 5,512,866;EP 0706719;DE 0706719;FR 0706719;GB 0706719;CN 95190359.4;US 5,602,518;US 5,721,520;US 5,745,018;EP 0910875;DE 0910875;DK 0910875;FR 0910875;GB 0910875;IE 0910875;JP 505182/98;KR 10-323013;US 5,994,978;US 6,462,629;CN 00810420.4;US 6,559,735;US 6,650,202;US 6,834,429.Other US and foreign patents pending.

CTS Corporation 2006 reserves all copyrights in the layout, design and configuration of the patterns on this product.


Mechanical Drawing

Revision B – Origin Date: October 19, 2007 – Revision Date: July 28, 2011

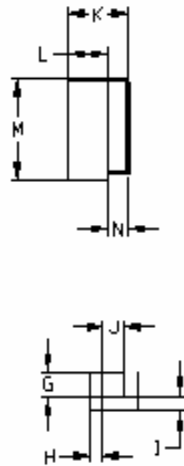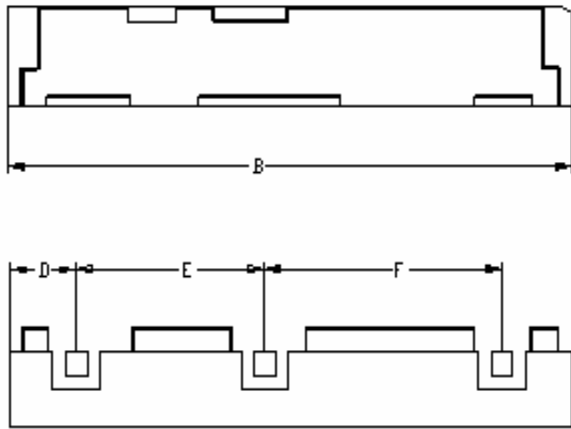

Dim	Nominal (mm)	Tolerance (mm) +/- or max
A		
B	42.0	max
C		
D	4.6	0.25
E	14.1	0.13
F	18.4	0.13
G	2.01	0.13
H	1.00	0.13
I	1.00	0.13
J	2.05	0.13
K	6.65	max
L	5.0	Max
M	8.0	max
N	1.65	0.13

PCB Layout

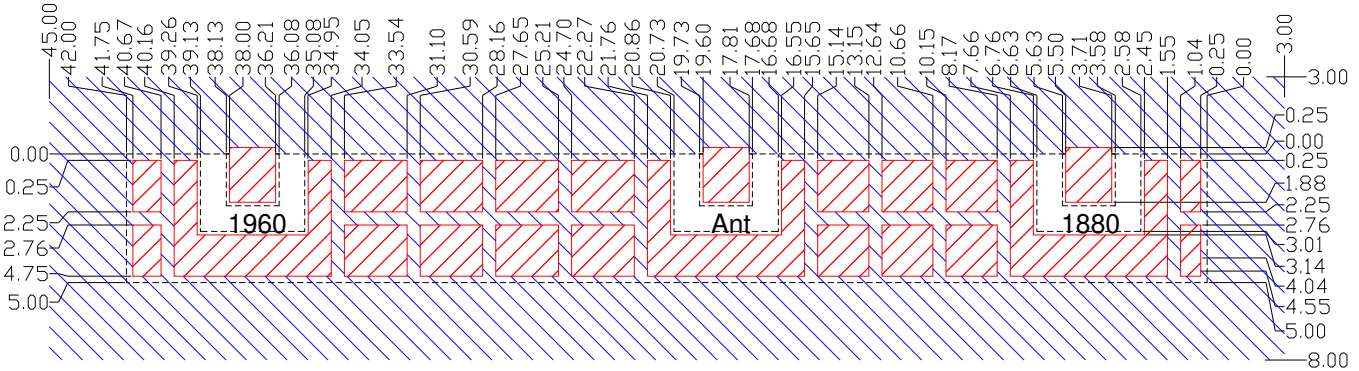


----- Filter Outline

Solder Resist Over Dielectric

Exposed Conductor


Solder Resist Over Conductor

Packaging and Marking

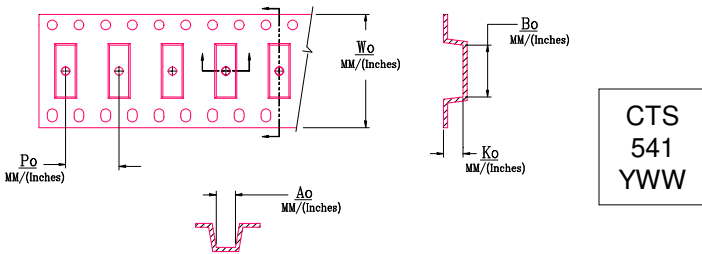

Wo	Ao	Bo	Ko	Po
Inches/mm	Inches/mm	Inches/mm	Inches/mm	Inches/mm
2.205"/56.0	0.274"/6.95	1.665"/42.3	0.315"/8.0	0.472"/12.0

DIMENSION	UNITS	SPECIFICATION
REEL DIAMETER	mm	330
REEL WEIGHT	kg	1
REEL QUANTITY	ea.	250



Electrical response

