



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features

- High Rejection
- Low Ripple
- Low Loss

Description

Surface mount, silver (Ag) coated ceramic duplexer. Developed for use in TDS-CDMA infrastructure applications.

Weight: 3.7 grams typical

Material: Filter is composed of a ceramic block plated with Ag and a shield made of nickel silver plated steel.

Filter complies with RoHS standards.

Electrical Specifications



Parameter	Frequency (MHz)	Typical @ 25°C	Spec. @ 25°C	Spec. Over -40°C to +85°C
Low Band Response				
Passband Insertion Loss	1880 - 1920	-2.4	-3.2	-3.5
Passband Ripple	1880 - 1920	0.9	1.0	1.2
Passband Return Loss @ Ant	1880 - 1920	-16.0	-14.0	-14.0
Passband Return Loss @ Low Band	1880 - 1920	-16.0	-14.0	-14.0
Attenuation	0.1 - 1200	-48.0	-38.0	-38.0
	1200 - 1840	-32.0	-30.0	-30.0
	1840 - 1860	-18.0	-16.0	-16.0
	1940 - 1960	-27.0	-16.0	-16.0
	1960 - 2000	-34.0	-25.0	-25.0
	2000 - 2010	-47.0	-35.0	-35.0
	2010 - 2025	-49.0	-45.0	-45.0
	2025 - 2700	-37.0	-25.0	-25.0
High Band Response				
Passband Insertion Loss	2010 - 2025	-2.4	-3.2	-3.5
Passband Ripple	2010 - 2025	0.4	1.0	1.2
Passband Return Loss @ Ant	2010 - 2025	-16.0	-14.0	-14.0
Passband Return Loss @ High Band	2010 - 2025	-16.0	-14.0	-14.0
Attenuation:	0.1 - 1880	-48.0	-43.0	-43.0
	1880 - 1920	-58.0	-50.0	-50.0
	1920 - 1930	-54.0	-43.0	-43.0
	1930 - 1970	-34.0	-30.0	-30.0
	1970 - 1990	-19.0	-16.0	-16.0
	2045 - 2065	-19.0	-16.0	-16.0
	2065 - 2170	-37.0	-33.0	-33.0
	2170 - 2700	-42.0	-38.0	-38.0
Isolation				
Rejection @ Low band	1880 - 1920	-51.0	-50.0	-50.0
Rejection @ High band	2010 - 2025	-46.0	-45.0	-45.0
Power into any port			2 Watts max	


Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562; US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;DE 0573597;FR 0573597;JP 508149/92;KR 142171;US 5,162,760;US 5,218,329;US 5,250,916;US 5,327,109;US 5,488,335;CA 2114029;FR 9306297;GB 2273393;JP 3205337;KR 115113;CN 93106228.4;US 5,512,866;EP 0706719;DE 0706719;FR 0706719;GB 0706719;CN 95190359.4;US 5,602,518;US 5,721,520;US 5,745,018;EP 0910875;DE 0910875;DK 0910875;FR 0910875;GB 0910875;IE 0910875;JP 505182/98;KR 10-323013;US 5,994,978;US 6,462,629;CN 00810420.4;US 6,559,735;US 6,650,202;US 6,834,429. Other US and foreign patents pending.

Mechanical Drawing


Revision B – Origin Date: March 5, 2010 – Revision Date: July 11, 2011

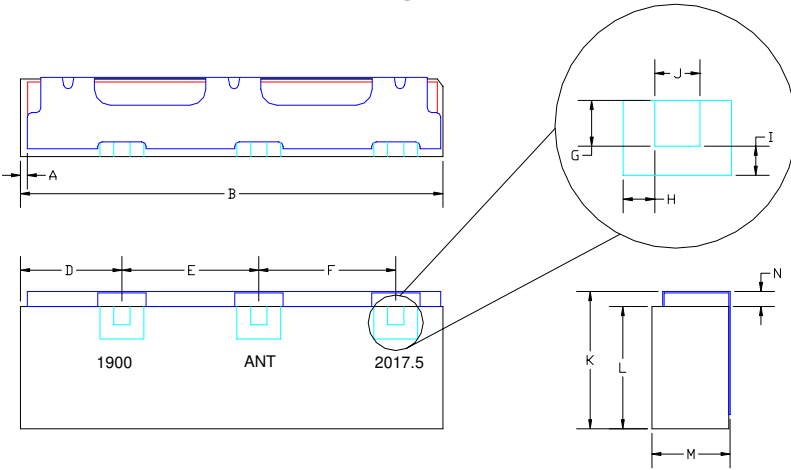


Dim	Nominal (mm)	Tolerance (mm) +/- or max
A	0.25	0.25
B	24.04	max
C		
D	2.72	0.25
E	7.44	0.13
F	10.52	0.13
G	1.02	0.13
H	0.79	0.13
I	0.79	0.13
J	0.89	0.13
K	6.79	max
L	5.80	max
M	4.60	max
N	0.84	0.13

Electrical response

1200 1400 1600 1800 2000 2200 2400 2600 2800


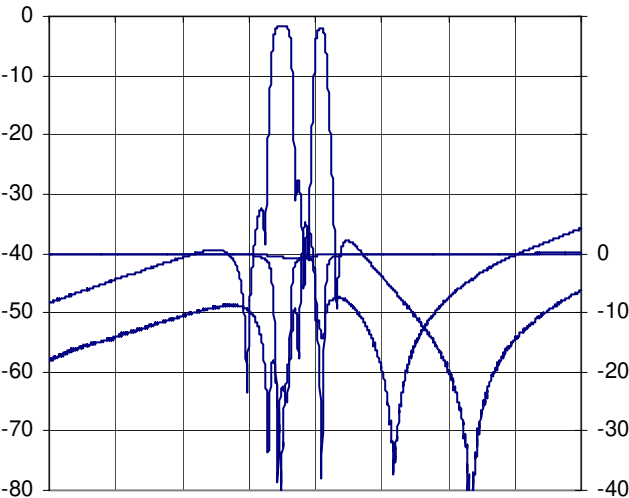


PCB Layout

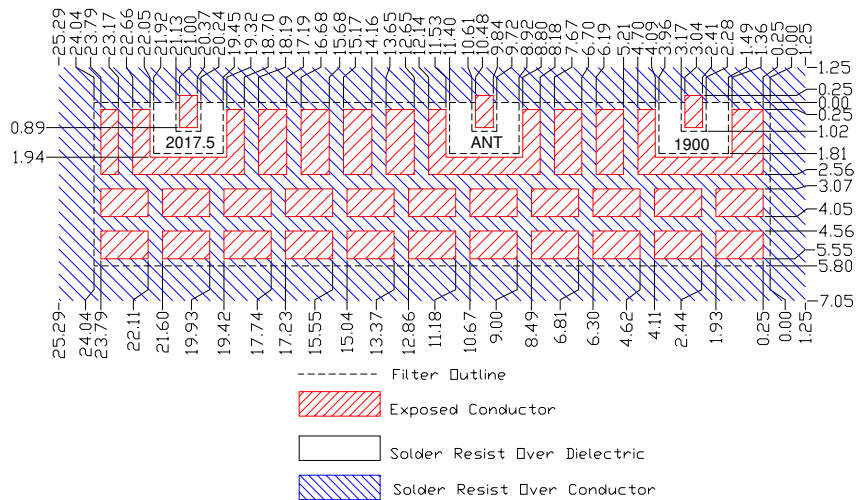

Packaging and Marking

DIMENSION	UNITS	SPECIFICATION
REEL DIAMETER	mm	330
REEL WEIGHT	kg	2.3
REEL QUANTITY	ea.	500

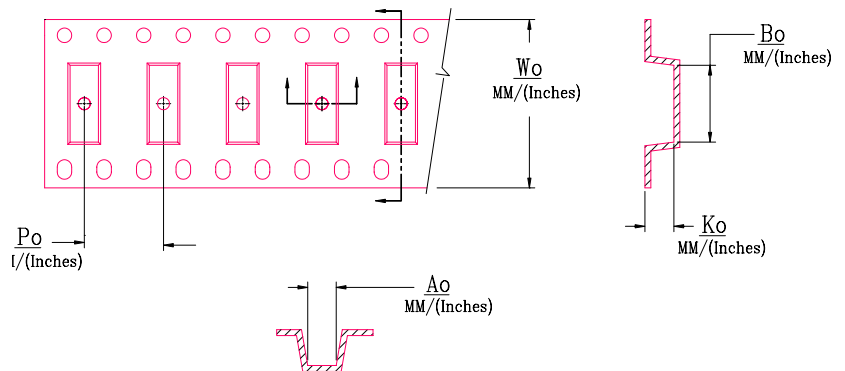

Wo	Ao	Bo	Ko	Po
Inches/mm	Inches/mm	Inches/mm	Inches/mm	Inches/mm
1.732" / 44.0	0.271" / 6.88	0.974" / 24.74	0.195" / 4.95	0.472" / 12.0