



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Parameter	Rating	Units
Blocking Voltage	400	V <sub>P</sub>
Load Current	500	mA <sub>rms</sub> / mA <sub>DC</sub>
On-Resistance (max)	6	Ω
Input Voltage to operate	5-12	V

## Features

- Voltage-Controlled Operation
- Matches Popular Reed Relay Pin-Out
- 3750V<sub>rms</sub> Input/Output Isolation
- 100% Solid State
- Arc-Free With No Snubbing Circuits
- No EMI/RFI Generation
- Immune to Radiated EM Fields
- 4-Pin DIP Package
- Auto Pick & Place, Wave Solderable

## Applications

- Security
  - Passive Infrared Detectors (PIR)
  - Data Signalling
  - Sensor Circuitry
- Telecommunications
- Instrumentation
  - Multiplexers
  - Data Acquisition
  - Electronic Switching
  - I/O Subsystems
- Energy Meters
- Medical Equipment—Patient/Equipment Isolation
- Aerospace
- Industrial Controls

## Description

The CPC1215 is a voltage-controlled, single-pole, normally open (1-Form-A), optically coupled solid state relay in a 4-pin Dual In-line Package (DIP). IXYS Integrated Circuits Division's patented OptoMOS architecture makes available the optically coupled technology necessary to activate the output's efficient MOSFET switches while providing a 3750V<sub>rms</sub> input-to-output isolation barrier. Control of the isolated output is accomplished by means of a highly effective GaAlAs infrared LED at the input while the internal resistor in series with the LED enables the input's voltage-controlled operation.

Because the input is solid state there is no need for snubbers or "catch" diodes to suppress the inductive flyback transient voltage normally associated with EMR coils.


## Approvals

- UL 1577 Approved Component: Pending
- CSA Certified Component: Certificate 1172007
- Certified to:
  - IEC 60950-1: 2005
  - EN 60950-1: 2006
  - TUV Certificate: B 09 07 49410 004


## Ordering Information

Part #	Description
CPC1215G	4-Pin DIP (14-Pin Body) (25/tube)

## Pin Configuration



## Switching Characteristics of Normally Open Devices

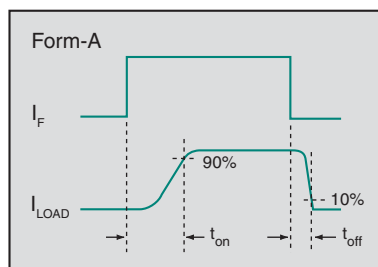

## Absolute Maximum Ratings @ 25°C

Parameter	Ratings	Units
Blocking Voltage	400	V <sub>P</sub>
Reverse Input Voltage	5	V
Input Control Voltage	15	V
Input Power Dissipation	225	mW
Total Power Dissipation <sup>1</sup>	1600	mW
Isolation Voltage, Input to Output	3750	V <sub>rms</sub>
ESD, Human Body Model	8	kV
Operational Temperature	-40 to +85	°C
Storage Temperature	-40 to +125	°C

<sup>1</sup> Derate linearly 16.6 mW / °C

*Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.*












## Electrical Characteristics @ 25°C

Parameter	Conditions	Symbol	Min	Typ	Max	Units
<b>Output Characteristics</b>						
Load Current						
Continuous	V <sub>IN</sub> =5V	I <sub>L</sub>	-	-	500	mA <sub>rms</sub> / mA <sub>DC</sub>
Peak	t=10ms	I <sub>LPK</sub>	-	-	±1.5	A <sub>P</sub>
On-Resistance <sup>1</sup>	I <sub>L</sub> =500mA	R <sub>ON</sub>	-	4.15	6	Ω
Off-State Leakage Current	V <sub>L</sub> =400V <sub>P</sub>	I <sub>LEAK</sub>	-	0.009	1	μA
Switching Speeds						
Turn-On (Output Closed)	V <sub>IN</sub> =5V, V <sub>L</sub> =10V	t <sub>on</sub>	-	1.55	5	ms
Turn-Off (Output Open)		t <sub>off</sub>	-	0.42	3	
Output Capacitance	V <sub>IN</sub> =0V, V <sub>L</sub> =50V, f=1MHz	C <sub>OUT</sub>	-	18	-	pF
<b>Input Characteristics</b>						
Input Control Voltage						
Recommended Operating Range	I <sub>L</sub> =500mA	V <sub>IN</sub>	5	-	12	V
Output Closed			-	-	3.75	
Output Open			1	-	-	
Reverse Input Current	V <sub>IN</sub> =-5V	I <sub>R</sub>	-	-	10	μA
Input Resistor	-	-	900	1000	1100	Ω
<b>Common Characteristics</b>						
Capacitance, Input to Output	-	-	-	1	-	pF

<sup>1</sup> Measurement taken within 1 second of on-time.




## PERFORMANCE DATA\*

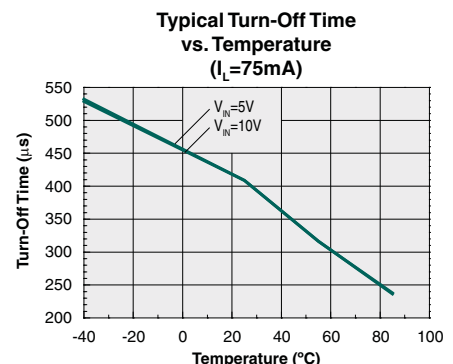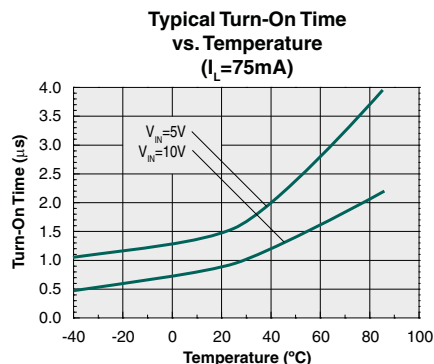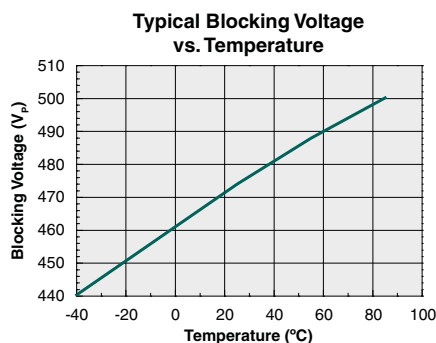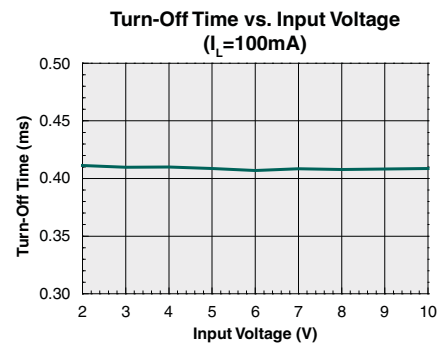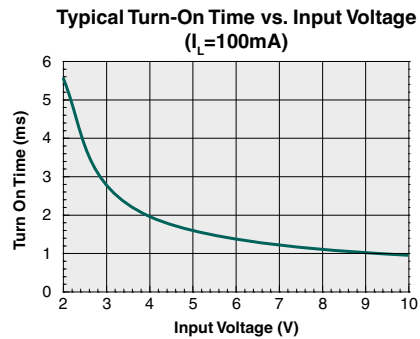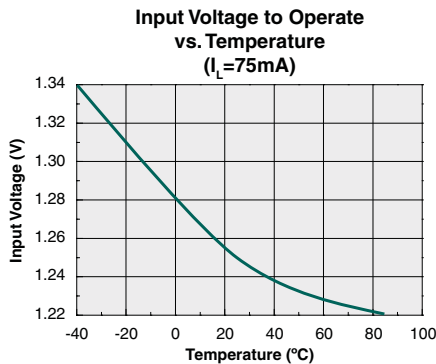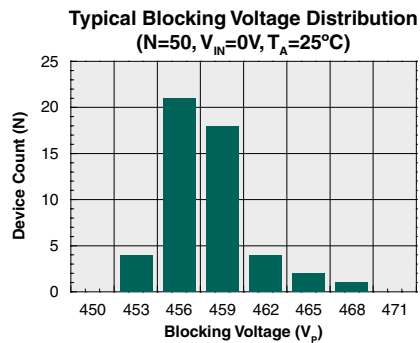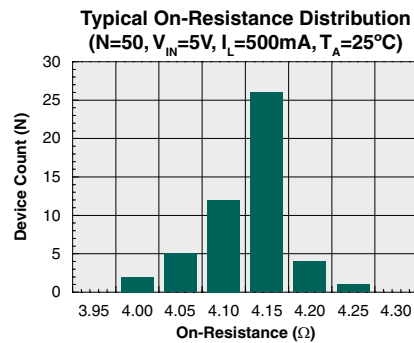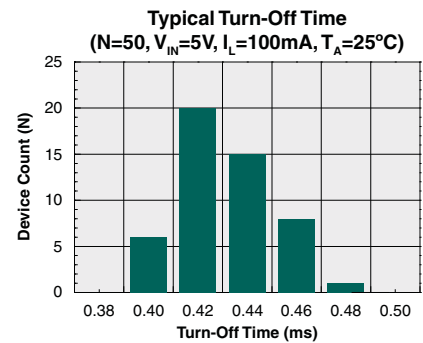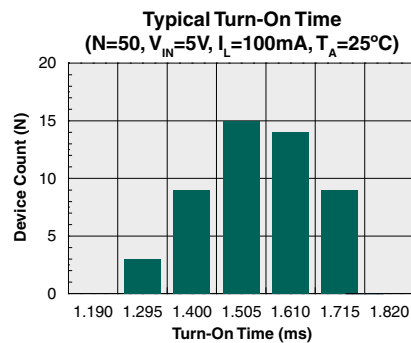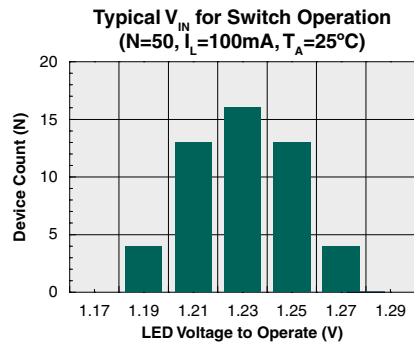


\*The Performance Data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

## PERFORMANCE DATA\*


**Typical On-Resistance vs. Temperature**  
( $V_{IN}=5V$ )

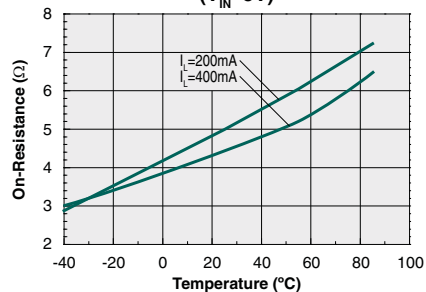


**Load Current vs. Temperature**  
( $V_{IN}=5V$ )

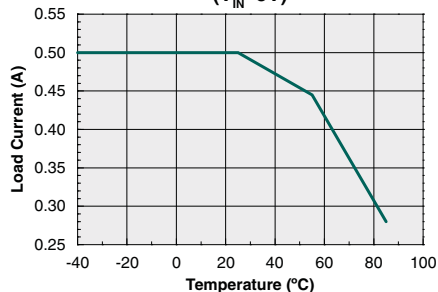


**Typical Load Current vs. Load Voltage**  
( $V_{IN}=5V, T_A=25^\circ C$ )

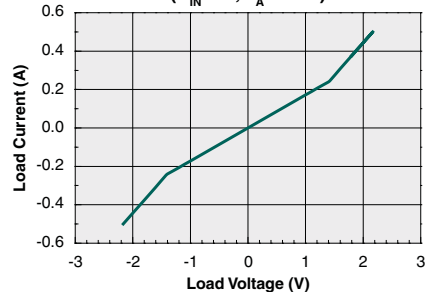


**Typical Leakage vs. Temperature**  
Measured Across Pins 14 & 8  
( $V_L=400V$ )

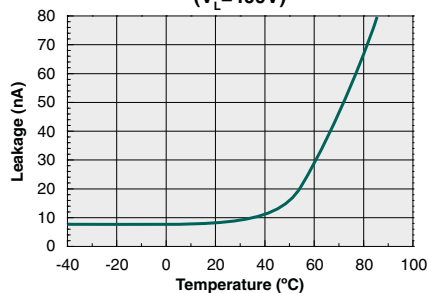

**Output Capacitance vs. Load Voltage**  
( $V_{IN}=0V, f=1MHz, T_A=25^\circ C$ )

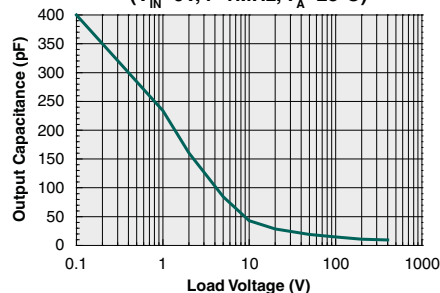

**Energy Rating Curve**

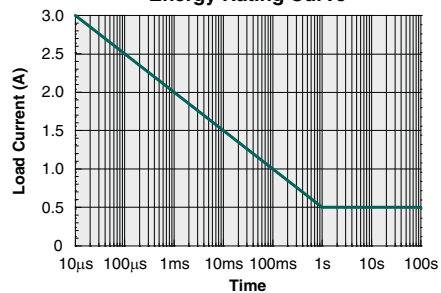

\*The Performance Data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

## Manufacturing Information

### Moisture Sensitivity



All plastic encapsulated semiconductor packages are susceptible to moisture ingress. IXYS Integrated Circuits Division classified all of its plastic encapsulated devices for moisture sensitivity according to the latest version of the joint industry standard, **IPC/JEDEC J-STD-020**, in force at the time of product evaluation. We test all of our products to the maximum conditions set forth in the standard, and guarantee proper operation of our devices when handled according to the limitations and information in that standard as well as to any limitations set forth in the information or standards referenced below.

Failure to adhere to the warnings or limitations as established by the listed specifications could result in reduced product performance, reduction of operable life, and/or reduction of overall reliability.

This product carries a **Moisture Sensitivity Level (MSL) rating** as shown below, and should be handled according to the requirements of the latest version of the joint industry standard **IPC/JEDEC J-STD-033**.

Device	Moisture Sensitivity Level (MSL) Rating
CPC1215G	MSL 1

### ESD Sensitivity



This product is **ESD Sensitive**, and should be handled according to the industry standard **JESD-625**.

### Reflow Profile

This product has a maximum body temperature and time rating as shown below. All other guidelines of **J-STD-020** must be observed.

Device	Maximum Temperature x Time
CPC1215G	245°C for 30 seconds



### Board Wash

IXYS Integrated Circuits Division recommends the use of no-clean flux formulations. However, board washing to remove flux residue is acceptable. Since IXYS Integrated Circuits Division employs the use of silicone coating as an optical waveguide in many of its optically isolated products, the use of a short drying bake could be necessary if a wash is used after solder reflow processes. Chlorine- or Fluorine-based solvents or fluxes should not be used. Cleaning methods that employ ultrasonic energy should not be used.




## MECHANICAL DIMENSIONS


### CPC1215G

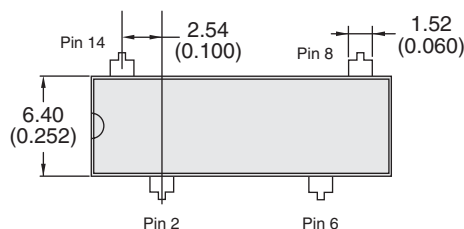

**DIMENSIONS**  
mm  
(inches)

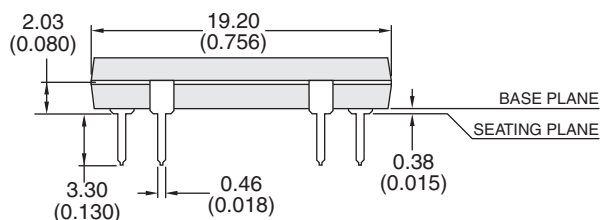

### PCB Hole Pattern

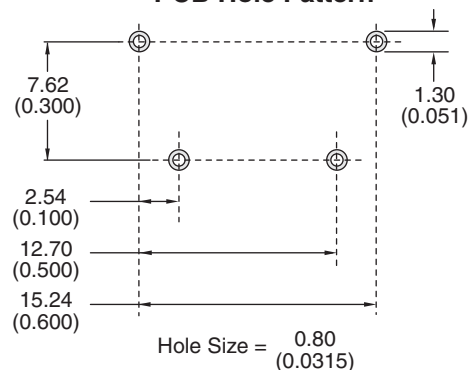

#### NOTES:

1. Package tolerances to be  $\pm 0.05$  [0.002] unless otherwise specified.
2. Tolerance of package misalignment or mismatch to be  $\pm 0.05$  [0.002].
3. General tolerances to be  $\pm 0.05$  [0.002] unless otherwise specified.

For additional information please visit our website at: [www.ixysic.com](http://www.ixysic.com)

IXYS Integrated Circuits Division makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in IXYS Integrated Circuits Division's Standard Terms and Conditions of Sale, IXYS Integrated Circuits Division assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of IXYS Integrated Circuits Division's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. IXYS Integrated Circuits Division reserves the right to discontinue or make changes to its products at any time without notice.