



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: 7.0 to 18.0 GHz
- 1.2 FREQ. SENSITIVITY: SEE TABLE
- 1.3 COUPLING: SEE TABLE
- 1.4 VSWR (MAX): SEE TABLE
- 1.5 INSERTION LOSS (EXC. COUPLED POWER): 0.50dB MAX.
- 1.6 DIRECTIVITY: 15dB MIN.
- 1.7 POWER: SEE TABLE
- 1.8 RF IMPEDANCE: 50 OHMS

- 2.0 FINISHING:
- 2.1 GREY OVER MIL-E-15090 TYPE II, CLASS 2 OVER MIL-C-5541 CLASS 3A MEETS MIL-F-14072 MEETS MIL-E-5400 AND MIL-E-16400V.
- 2.2 MARK UNIT AS SHOWN. REF: slk-09341-82-[32 THRU 35]

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

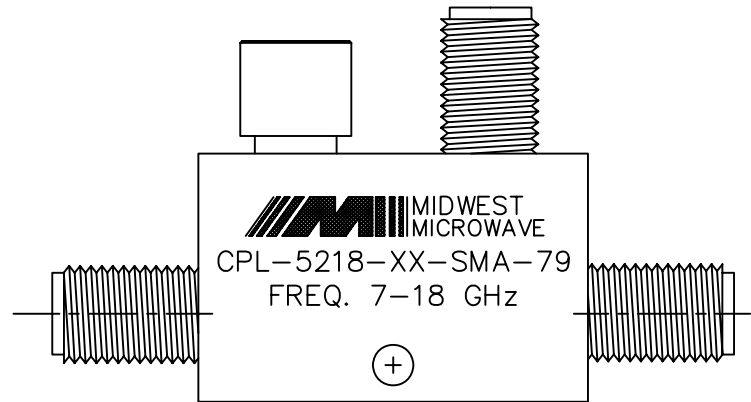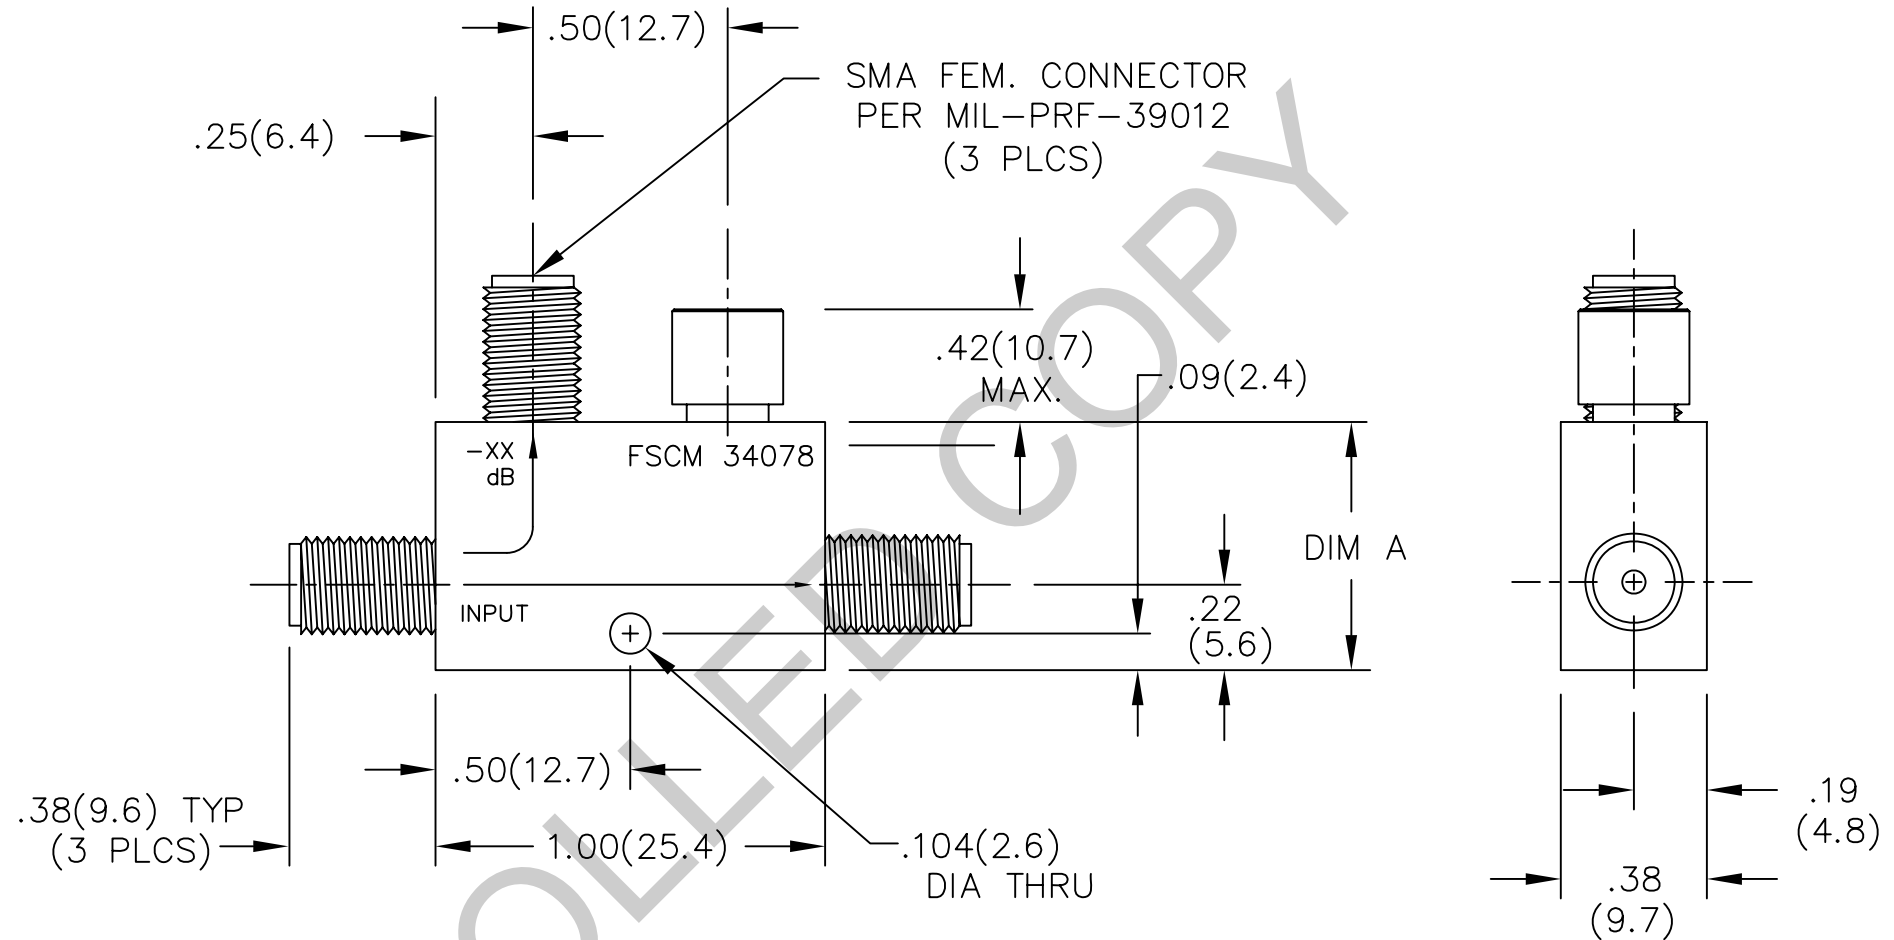

BACKSIDE MARKING

CPL-5218-30-SMA-79	.63(15.9)	30dB	±0.75dB	1.45:1	50	50	3,000	0.67 (19.0)
CPL-5218-20-SMA-79	.50(12.7)	20dB	±0.75dB	1.45:1	50	50	3,000	0.60 (17.0)
CPL-5218-10-SMA-79	.50(12.7)	10dB	±0.75dB	1.45:1	50	10	3,000	0.60 (17.0)
CPL-5218-06-SMA-79	.50(12.7)	6dB	±0.50dB	1.35:1	50	4	3,000	0.60 (17.0)
CPL-5218-XX-SMA-79	DIM A	-XX ±1.0dB COUPLING	FREQ. SENSITIVITY	(MAX) VSWR	INPUT POWER (WATTS)	REF. PEAK	0z (GRAMS) WIEGHT	

MODEL NUMBER  
CPL-5218-XX-SMA-79  
REV.  
-1

REV.	DESCRIPTION	DATE
-	RELEASED	8/13/91
-1	ADDED TITLEBLOCK	4/22/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005  
2 PLACE DECIMALS ±.02  
FRACTIONS ±1/64  
PARALLELITY: T.I.R. \_\_\_\_\_  
FLATNESS: T.I.R. \_\_\_\_\_  
CONCENTRICITY: T.I.R. \_\_\_\_\_  
ANGLES AND PERPENDICULARITY: ±1°

FSCM NO. **34078** **MIDWEST MICROWAVE**

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave

TITLE  
DIRECTIONAL COUPLER

DRAWING NUMBER  
CPL-5218-XX-SMA-79

SCALE: 2=1 SHEET 1 of 1

DRAWN/DATE  
A.BEATTY  
8/9/91

ENG./DATE  
T.MATTHEWS  
8/9/91

CHECKED/DATE  
C.RICKARD  
8/9/91

APPROVED/DATE