



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MODEL NUMBER
CPL-5232-06-SMA-79

- NOTES:
- ELECTRICAL SPECIFICATIONS:
 - FREQUENCY RANGE: 2.0 to 18.0 GHz
 - FREQ. SENSITIVITY: ± 0.60 dB
 - COUPLING (INCLUDING FREQ. SENSITIVITY): 6dB ± 1.0 dB (MEASURED WITH RESPECT TO OUTPUT).
 - VSWR (MAX): 1.50:1
 - INSERTION LOSS: 0.8dB EXCLUDING COUP LOSS
2.00dB INCLUDING COUP LOSS
 - DIRECTIVITY:
 - 2 to 12 GHz: 15dB MIN.
 - 12 to 18 GHz: 12dB MIN.
 - POWER:
 - AVG.: 20 WATTS
 - PEAK: 3 KILOWATTS
 - RF IMPEDANCE: 50 OHMS
 - WEIGHT: 1.30 Oz. (36.9 GRAMS)
 - FINISHING:
 - GREY OVER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400 AND MIL-E-16400V.
 - MARK UNIT AS SHOWN.
 - DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

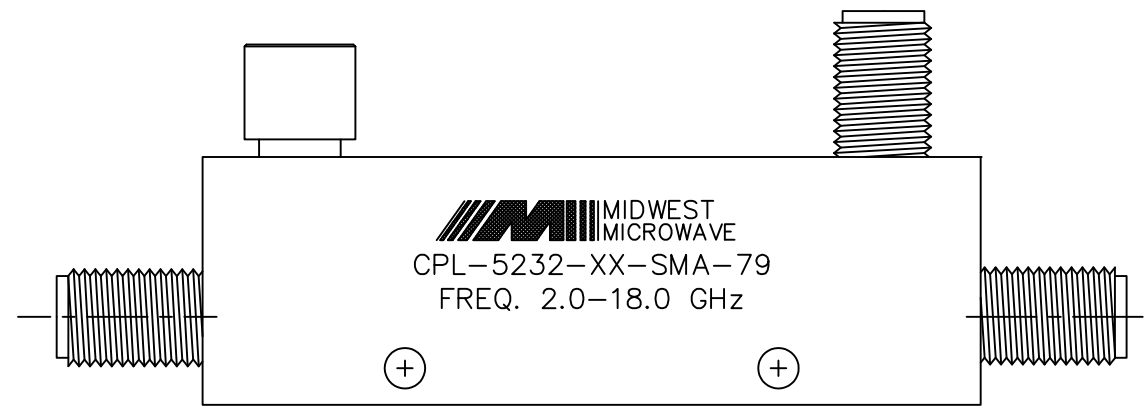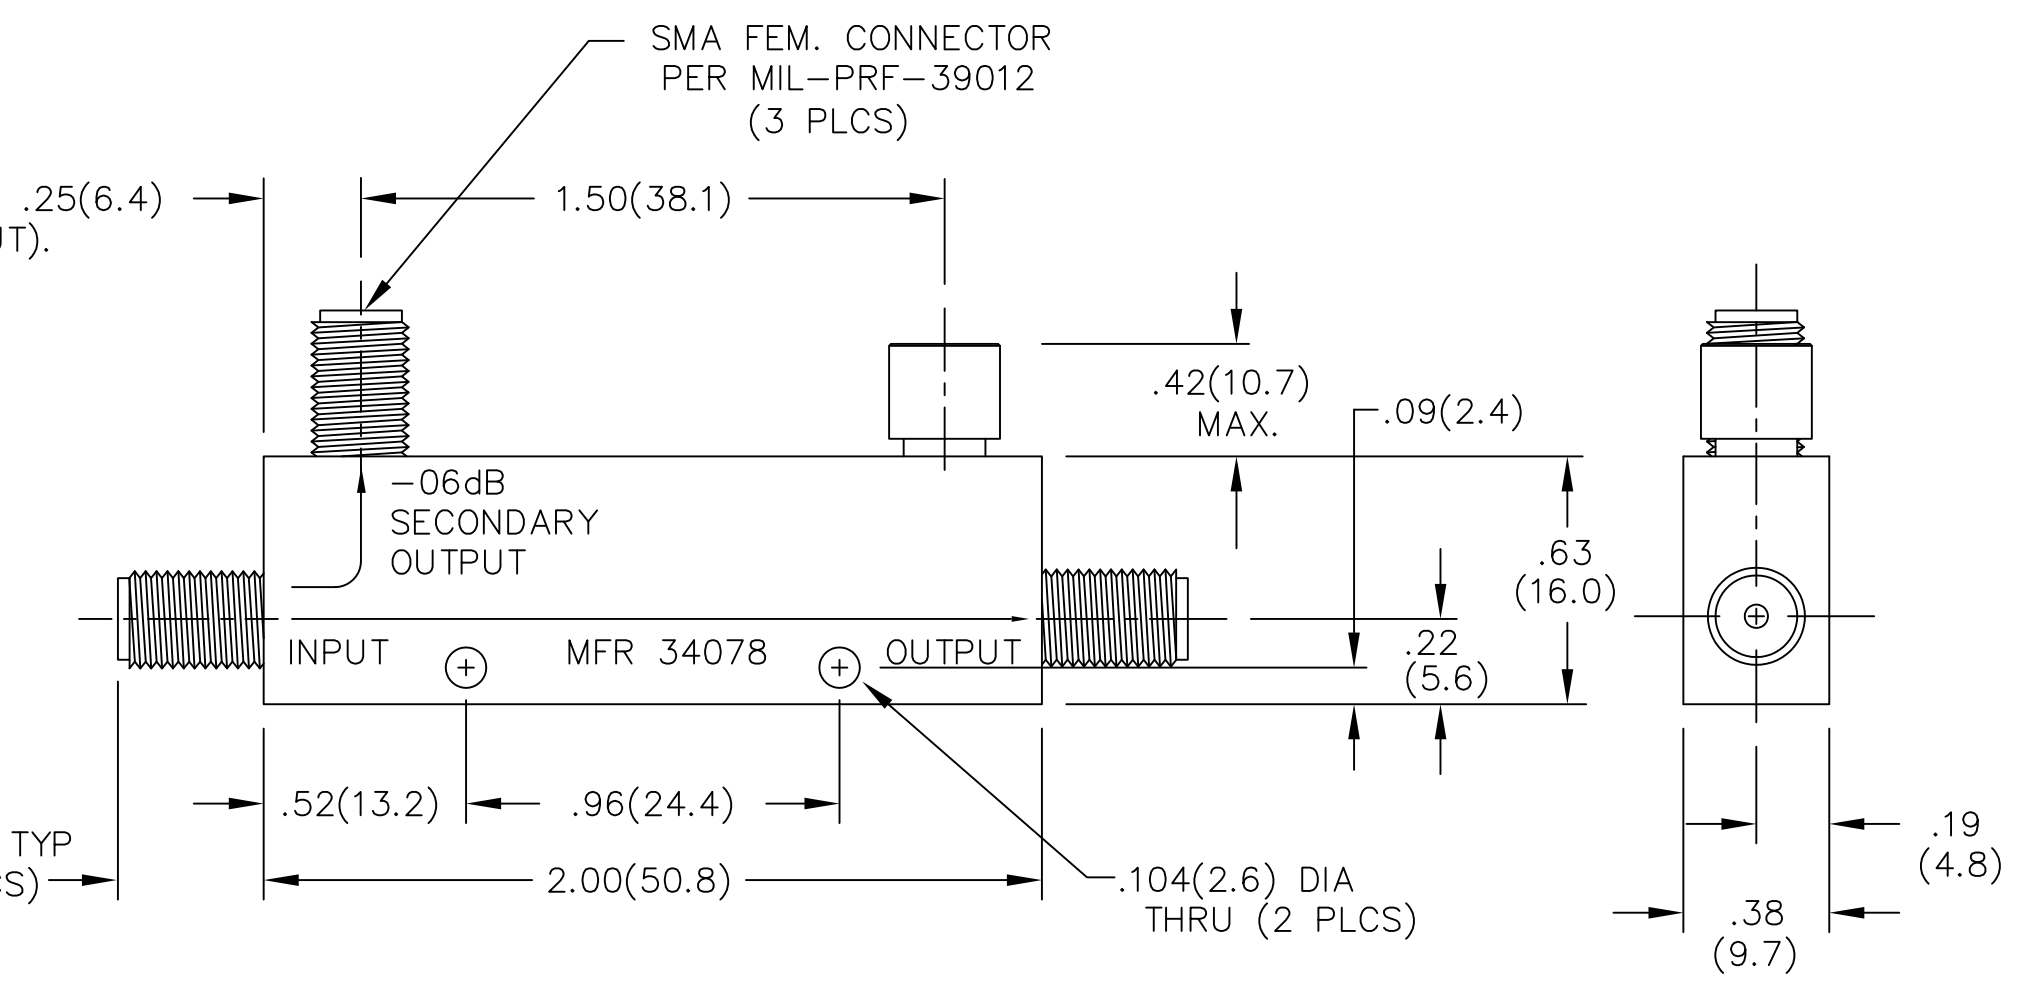

BACKSIDE MARKING

| | | | |
|---|---|---|---|
| NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power. UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ± 0.005 2 PLACE DECIMALS ± 0.02 FRACTIONS $\pm 1/64$ PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: $\pm 1'$ | CAGE CODE 34078 | MIDWEST MICROWAVE | |
| | EMERSON Network Power Connectivity Solutions | | TITLE DIRECTIONAL COUPLER OUTLINE DRAWING |
| DRAWN/DATE A.BEATTY 12/11/91 | ENG./DATE P.GOODMAN 12/12/91 | DRAWING NUMBER CPL-5232-06-SMA-79-01 | REV. K |
| CHECKED/DATE A.CATALANO 12/11/91 | APPROVED/DATE | SCALE: 2=1 | SHEET 1 of 1 |

| REV. | DESCRIPTION | DATE |
|------|------------------|----------|
| I | RELEASED | 12/12/91 |
| A | ECN 11469 | 1/16/91 |
| B | ECN 11655 | 3/12/92 |
| B1 | ADDED TITLEBLOCK | 4/26/05 |
| J | ECO 22344 | 11/09/10 |
| K | ECO 24809 | 11/09/10 |