

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









## $\pm 1.0$ 10.0 CTX16-17769 wwllyy R $\pm 1.0$ $\emptyset 0.91 \pm 0.051$ min max. 19.8 ±1.5 6.35

## **BOTTOM VIEW**

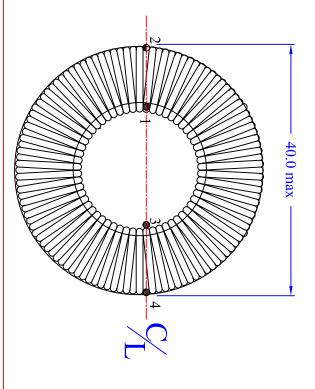

# RECOMMENDED PCB LAYOUT


FRONT VIEW

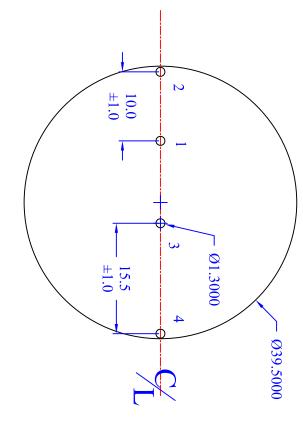

# ELECTRICAL CHARACTERISTICS

- OCL @ 20kHz, 0.10Vrms & 0.0Adc. 323.0 380.0 uH.
- OCL @ 20kHz, 0.10Vrms & 5.3Adc. 313.0 uH min.
  DCR @ 20°C pins (1 2); 0.24 Ohm maximum.
  DCR @ 20°C pins (3 4); 0.035 Ohms maximum.
- Turns ratio; pins (1-2):(3-4). 1:0.125

## **SCHEMATIC**



- 1) All Dimensions are in millimeters unless otherwise specified.
- 2) Tolerances are +/- 0.3mm unless stated otherwise.
- 3) wwllyy = (Date Code) R= (Revision Level)
- 4) RoHS Compliant

## Cooper Electronic Technologies

1225 Broken Sound Parkway NW, Suite F, Boca Raton, FL 33487

Inductor, Boost PFC 85 - 240Vac: 390V, 150 Watts

Toroid, Horizontal THT, 4term 50kHz, 340uH @ 5.3 A peak

Size A Revision Level: Drawing Number: CTX16-17769-R

Sheet 3 of 6