imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Coaxial Resonator Oscillator-CRO CVCO55CC-2496-2704

PERFORMANCE SPECIFICATION	MIN	ТҮР	MAX	UNITS
Lower Frequency:			2496	MHz
Upper Frequency:	2704			MHz
Tuning Voltage:	0.5		4.5	VDC
Supply Voltage:	4.75	5.0	5.25	VDC
Output Power:	+5.0	+7.0	+9.0	dBm
Supply Current:		20	35	mA
Harmonic Suppression (2 nd Harmonic):		-15	-10	dBc
Pushing:			1.5	MHz/V
Pulling, all Phases:			1.5	MHz pk-pk
Tuning Sensitivity:		78		MHz/V
Phase Noise @ 1kHz offset:		-73		dBc/Hz
Phase Noise @ 10kHz offset:		-102		dBc/Hz
Phase Noise @ 100kHz offset:		-126		dBc/Hz
Phase Noise @ 1MHz offset:		-142		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			15	pF
Operating Temperature Range:	-40		+85	°C
Storage Temperature Range:	-45		+90	°C

YSTEK


WА

A DIVISION OF CRYSTEK CORPORATION

R

Phase Noise (1 Hz BW, Typical)


Tuning Curve (Typical)

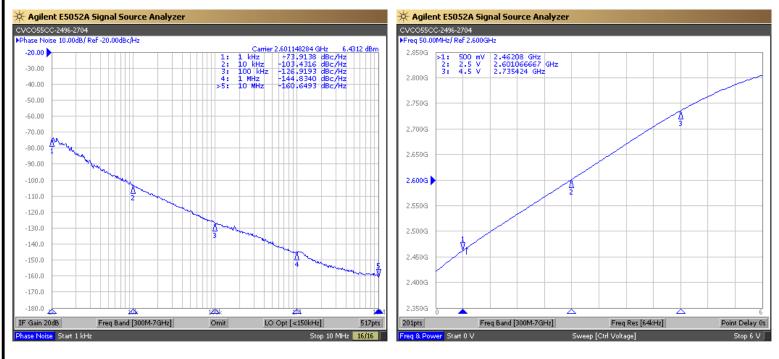

Page 1 of 2

12730 Commonwealth Drive • Fort Myers, Florida 33913 Phone: 239-561-3311 • 800-237-3061 Fax: 239-561-1025 • www.crystek.com

CRYSTEK CORPORATION

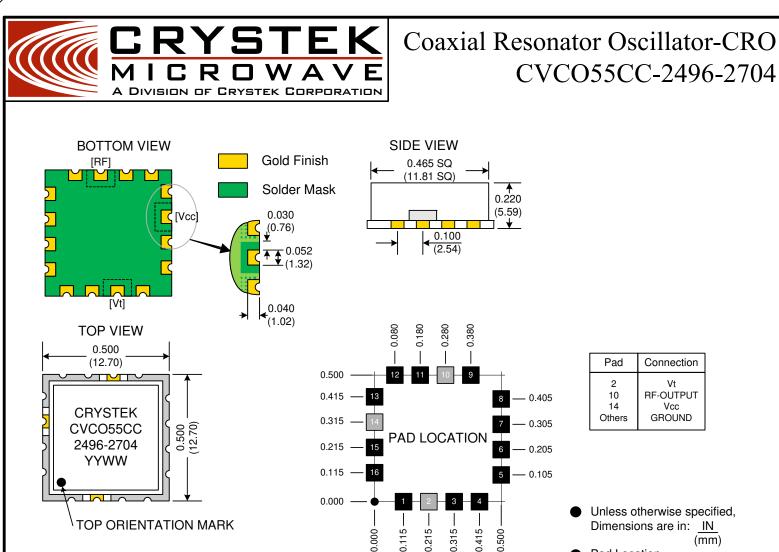

```
Pad Location
Dimensions are in: Inches
```

TAPE AND REEL 0.059 Ø TYP 0.157±0.004 (1.50 Ø) TYP (4.00±0.10) φ 0000 DIRECTION OF FEED 0.945±0.012 (24.00±0.30) 0.630±0.004 (16.00±0.10) Drawing not to scale **Product Control:** Crystek Part Number: CVCO55CC-2496-2704 Release Date: 01-Jun-10 Specification is subject to change without notice **Revision Level:** A Responsible: C. Vales Page 2 of 2 12730 COMMONWEALTH DRIVE * FORT MYERS, FLORIDA 33913 PHONE: 239-561-3311 • 800-237-3061 CORPOR ΔΤ FAX: 239-561-1025 • WWW.CRYSTEK.COM